



Astragal Mortise Lock for Inactive Doors


SIMPLY FLIP THE LEVER!

It will secure the top and the bottom of the inactive door

The Advantages

- None handed, easy to reach and operate
- Lever will give more leverage locking the shoot bolt into the striker cup
- 20mm stainless steel faceplate can be installed after finishing the door
- Adjustable backset (rod depth) 24-33 mm. Accommodate different astragal thickness from 1/2" to 1 1/8"
- Two set screws capture each rod securely in place, no threaded rods are required
- 10mm rods extend 25mm (1")
- Straight rod cut off from the hookup side, no grinding tip or retreading required
- Fixed rod sizes available for standard doors
- For doors up to 11' height
- Set screws (with locktite) to fasten the rods are concealed behind faceplate
- Nylon guide for top and bottom rods
- 304 stainless steel top and bottom reinforcement plates to support the rods
- Easily accessible rod height adjustment
- Jig and router bit available
- Adjustable top and bottom striker cups: in and out 1mm, sideways 6mm. Two height sizes 22 and 27mm

Faceplate Finishes

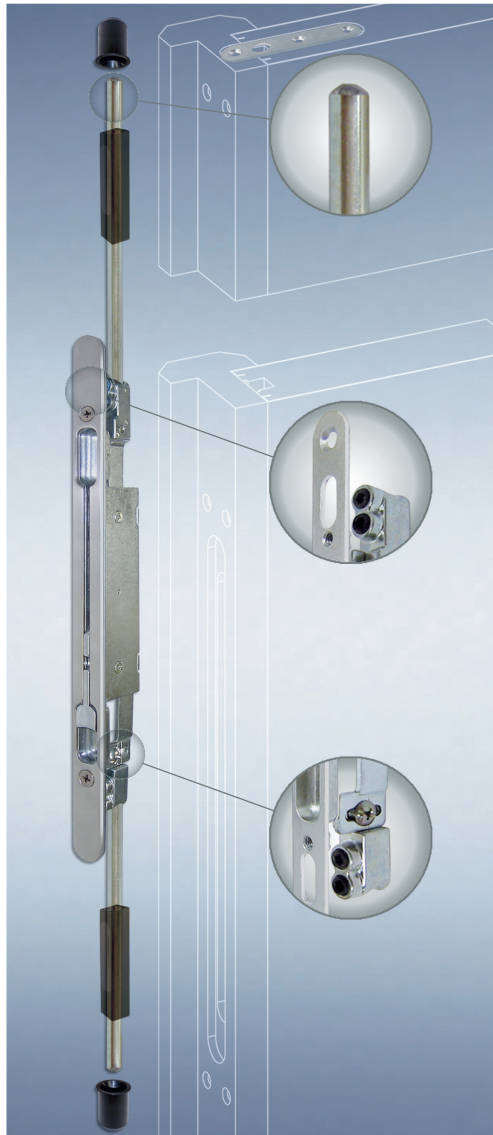

Colors on this document are graphic representation and may not be an exact match for the actual painted/plated hardware. For color selection, material samples are available on request.

QUÉBEC / MARITIMES
Ferco Ferrures de Bâtiment Inc.
2000, Rue Berlier
Laval, QC H7L 4S4
Tel.: 450 973-1437
1 800 355-8810
Fax: 450 973-7661
ferco@ferco.ca
www.ferco.ca

ONTARIO / WESTERN PROVINCES
Ferco Architectural Hardware Inc.
Tel.: 905 282-9588
1 800 668-5310
Fax: 905 282-9915

UNITED STATES
Ferco Architectural Hardware Inc.
Tel.: 1 800 927-1097
Fax: 1 888 454-0161

Securing technology for you

