

**Turn handles and accessories**

Turn handle – Special form	520 – 521
RONDO series	523 – 541
BELCANTO series	543 – 553
DIRIGENT series	555 – 585
Accessories	586 – 594


## Special form – interior turn handle, without PC hole

without flush pull



### Product information

- High-quality stainless steel turn handle, interior, without PC hole
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber, PVC or aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 78 mm

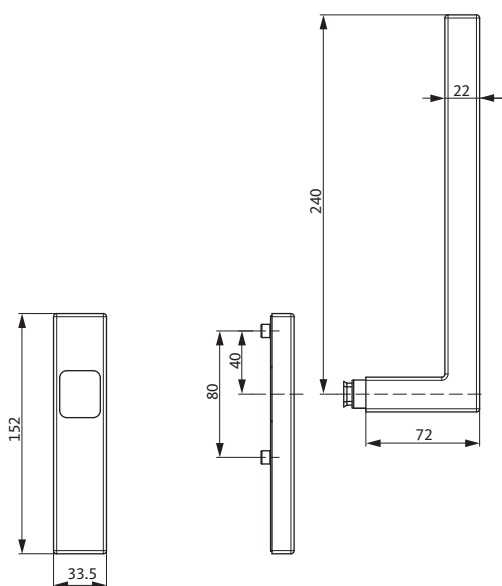

# Special form – interior turn handle, without PC hole

without flush pull



## Turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Special form – interior turn handle set, without PC hole	180°	Stainless steel	with lugs	no	1	K-18684-00-0-8

Contents	Quantity
Special form – interior turn handle, without PC hole	1
Square spindle (suitable for sash thicknesses up to 80 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs


Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	9-27272-01-0-1





## Product information

- High-quality stainless steel turn handles, optionally with
  - Dummy backplate
  - Profile cylinder hole (PC) or
  - Round cylinder hole (Swiss RC)
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Optionally with exterior handle or exterior flush pull
- Suitable for use with all customary Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16

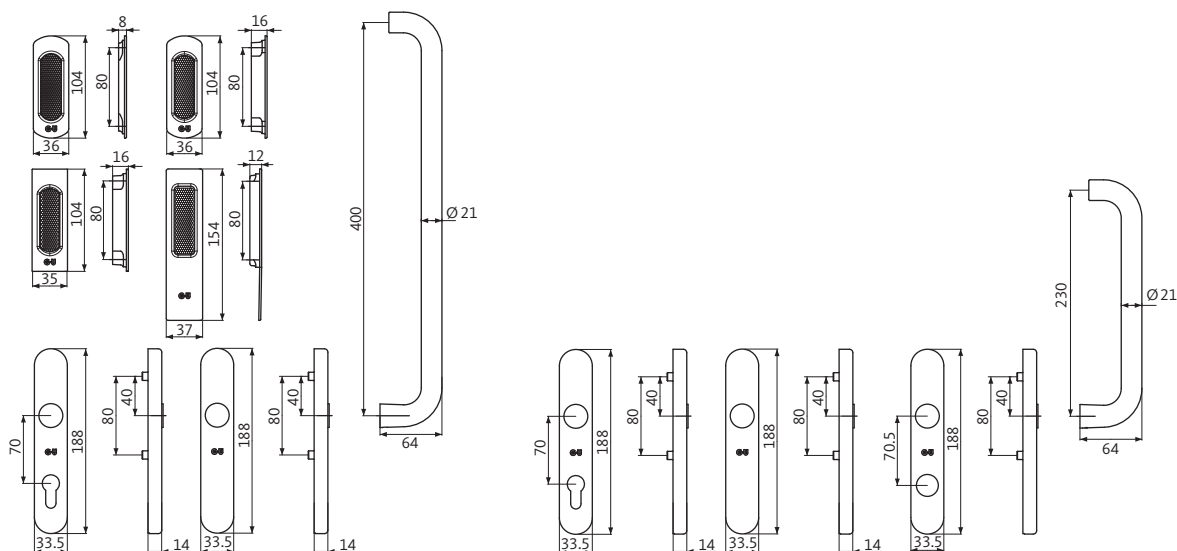

Some products in this series are suitable for




## RONDO series – interior turn handle with PC hole

with exterior flush pull



### Product information

- High-quality stainless steel turn handle, interior, with PC hole
- Exterior flush pull
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber, PVC or aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 78 mm

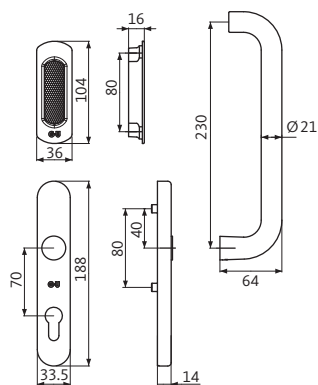

# RONDO series – interior turn handle with PC hole

with exterior flush pull



## Turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Set: RONDO interior turn handle, with PC hole	180°	Stainless steel	with lugs	yes	1	K-16797-00-0-8
	90°	Stainless steel	with lugs	yes	1	K-16863-00-0-8

Contents	Quantity
RONDO interior turn handle, with PC hole	1
Flush pull	1
Square spindle (suitable for sash thicknesses up to 80 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	9-27272-01-0-1


## RONDO series – interior turn handle without PC hole

with exterior flush pull



### Product information

- High-quality stainless steel turn handle, interior, without PC hole
- Exterior flush pull
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber and PVC Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 78 mm

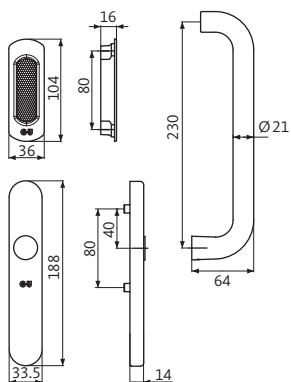



# RONDO series – interior turn handle without PC hole

with exterior flush pull



## Turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Set: RONDO interior turn handle, without PC hole	180°	Stainless steel	with lugs	no	1	K-16796-00-0-8
	90°	Stainless steel	with lugs	no	1	K-16862-00-0-8

Contents	Quantity
RONDO interior turn handle, without PC hole	1
Flush pull	1
Square spindle (suitable for sash thicknesses up to 80 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs


Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1

## RONDO series – interior/exterior handle set, with PC hole



### Product information

- High-quality stainless steel turn handles, interior and exterior, with PC hole
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber, PVC or aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 78 mm
- **Note:** We recommend the use of a buffer – see pages 260 + 261

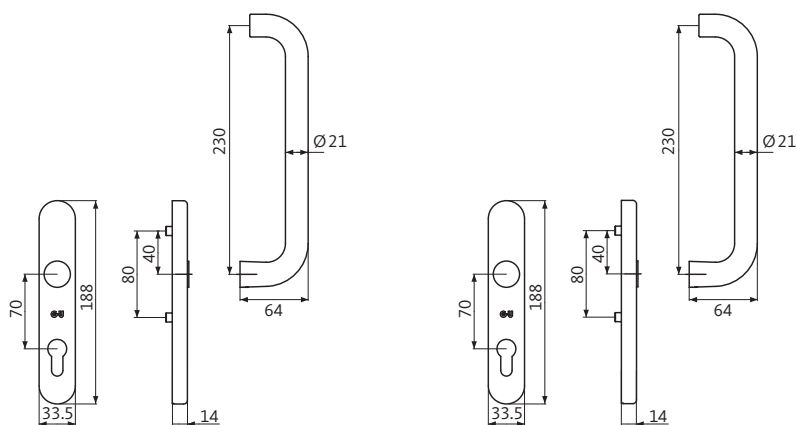

# RONDO series – interior/exterior handle set, with PC hole



## Turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Set: RONDO turn handle on both sides with PC hole	180°	Stainless steel	with lugs	yes	1	K-16798-00-0-8
	90°	Stainless steel	with lugs	yes	1	K-16864-00-0-8
Contents		Quantity				
RONDO turn handle on both sides with PC hole		1				
Fixing screws M6 x 100 mm		2				
Square spindle (suitable for sash thicknesses up to 92 mm)		1				

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately in the event of deviating sash thicknesses.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	145	contained in the turn handle set
	68		
	78		
	88		
	90		
	92		
	110	170	9-27377-18-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	70	9-13274-70-0-1
	68	80	9-13274-80-0-1
	78	90	9-13274-90-0-1
	88	100	contained in the turn handle set
	90		
	92		
	110	125	9-13274-96-R-1

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	9-27272-01-0-1


## RONDO series – interior turn handle with PC hole

without flush pull



### Product information

- High-quality stainless steel turn handle, interior, with PC hole
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber, PVC or aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thickness up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 78 mm

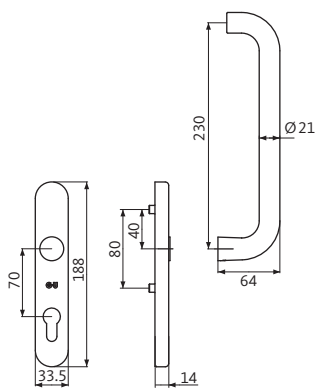

# RONDO series – interior turn handle with PC hole

without flush pull



## Turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Set: RONDO interior turn handle, with PC hole	180°	Stainless steel	with lugs	yes	1	K-16808-00-0-8
	90°	Stainless steel	with lugs	yes	1	K-16866-00-0-8
Contents		Quantity				
RONDO interior turn handle, with PC hole		1				
Square spindle (suitable for sash thicknesses up to 80 mm)		1				

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	9-27272-01-0-1


## RONDO series – interior turn handle without PC hole

without flush pull



### Product information

- High-quality stainless steel turn handle, interior, without PC hole
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber, PVC or aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 78 mm

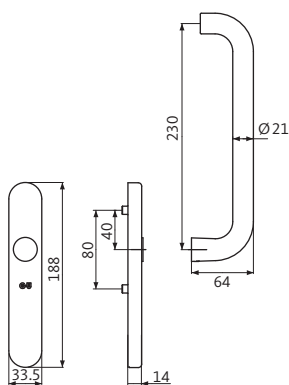

# RONDO series – interior turn handle without PC hole

without flush pull



## Turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Set: RONDO interior turn handle, without PC hole	180°	Stainless steel	with lugs	no	1	K-16807-00-0-8
	90°	Stainless steel	with lugs	no	1	K-16868-00-0-8

Contents	Quantity
RONDO interior turn handle, without PC hole	1
Square spindle (suitable for sash thicknesses up to 80 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs


Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	9-27272-01-0-1

## RONDO series – turn handle on both sides with Swiss RC hole



### Product information

- High-quality stainless steel turn handles, interior and exterior, with 22 mm Swiss RC hole
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber, PVC or aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 78 mm
- **Note:** We recommend the use of a buffer – see pages 260 + 261

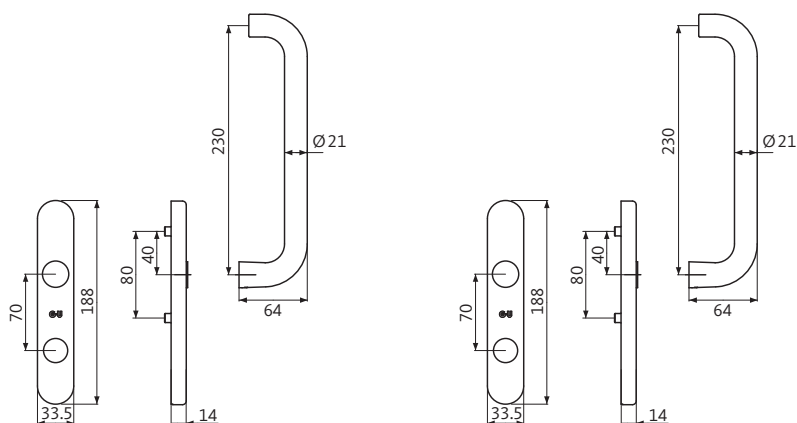



# RONDO series – turn handle on both sides with Swiss RC hole



## Turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Set: RONDO turn handle on both sides with Swiss RC hole	180°	Stainless steel	with lugs	yes	1	K-16908-00-0-8

Contents	Quantity
RONDO turn handle on both sides with Swiss RC hole	1
Fixing screws M6 x 100 mm	2
Square spindle (suitable for sash thicknesses up to 92 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately in the event of deviating sash thicknesses.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	145	contained in the turn handle set
	68		
	78		
	88		
	90		
	92		
	110	170	9-27377-18-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	70	9-13274-70-0-1
	68	80	9-13274-80-0-1
	78	90	9-13274-90-0-1
	88	100	contained in the turn handle set
	90		
	92		
	110	125	9-13274-96-R-1

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	9-27272-01-0-1


## RONDO series – interior turn handle with Swiss RC hole

without flush pull



### Product information

- High-quality stainless steel turn handle, interior, with 22 mm Swiss RC hole
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber, PVC or aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 78 mm

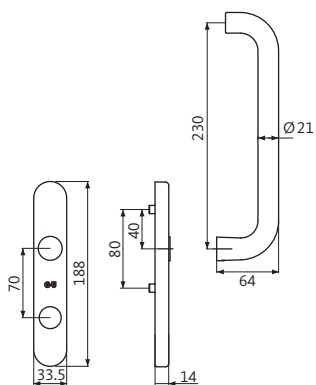

# RONDO series – interior turn handle with Swiss RC hole

without flush pull



## Turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Set: RONDO interior turn handle, with Swiss RC hole	180°	Stainless steel	with lugs	yes	1	K-17624-00-0-8

Contents	Quantity
RONDO interior turn handle with Swiss RC hole	1
Square spindle (suitable for sash thicknesses up to 80 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	9-27272-01-0-1

## RONDO series – interior turn handle with PC hole


extended handle



### Product information

- High-quality stainless steel turn handle, interior, with PC hole
- Special length 400 mm
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber, PVC or aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 400 mm  
Handle height 78 mm

This product is suitable for use in accordance with

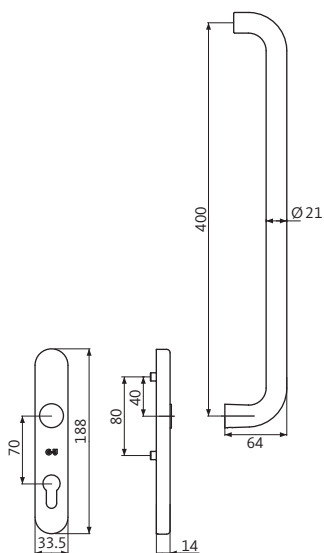

# RONDO series – interior turn handle with PC hole

## extended handle



### Turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Set: RONDO interior turn handle, with PC hole	180°	Stainless steel	with lugs	yes	1	K-17232-00-0-8

Contents	Quantity
RONDO interior turn handle, with PC hole	1
Square spindle (suitable for sash thicknesses up to 80 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

### Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

### Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

### Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	9-27272-01-0-1

## RONDO series – interior turn handle without PC hole


extended handle



### Product information

- High-quality stainless steel turn handle, interior, without PC hole
- Special length 400 mm
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber, PVC or aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 400 mm  
Handle height 78 mm

This product is suitable for use in accordance with

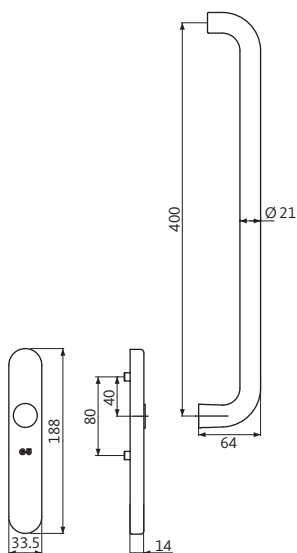

## Turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Set: RONDO interior turn handle, without PC hole	180°	Stainless steel	with lugs	no	1	K-17231-00-0-8

Contents	Quantity
RONDO interior turn handle, without PC hole	1
Square spindle (suitable for sash thicknesses up to 80 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	9-27272-01-0-1








## Product information

- High-quality stainless steel turn handles, optionally with
  - Dummy backplate
  - Profile cylinder hole (PC)
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Optionally with exterior handle or exterior flush pull
- Suitable for use with all customary Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16

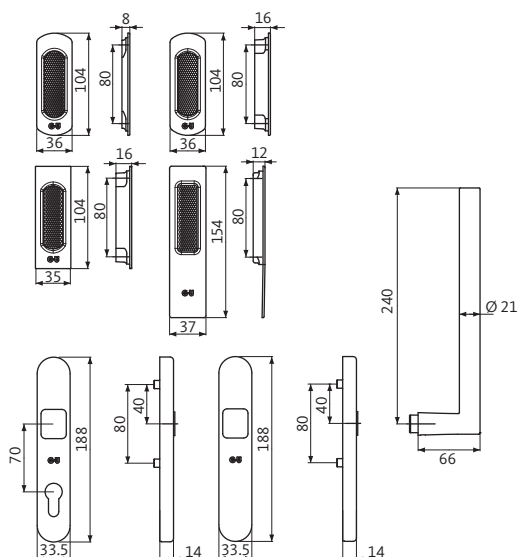

Some products in this series are suitable for




## BELCANTO series – interior turn handle with PC hole

with exterior flush pull



### Product information

- High-quality stainless steel turn handle, interior, with PC hole
- Exterior flush pull
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber and PVC Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 80 mm

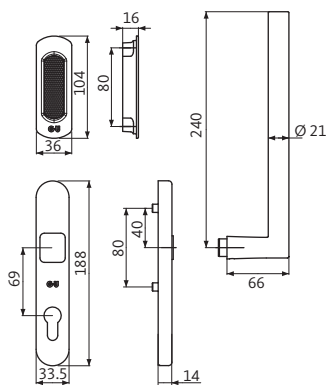

# BELCANTO series – interior turn handle with PC hole

with exterior flush pull



## Turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Set: BELCANTO interior turn handle with PC hole	180°	Stainless steel	with lugs	yes	1	K-17016-00-0-8
	90°	Stainless steel	with lugs	yes	1	K-17021-00-0-8
Contents		Quantity				
BELCANTO interior turn handle, with PC hole		1				
Flush pull		1				
Square spindle (suitable for sash thicknesses up to 80 mm)		1				

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1


## BELCANTO series – interior turn handle without PC hole

with exterior flush pull



### Product information

- High-quality stainless steel turn handle, interior, without PC hole
- Exterior flush pull
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber and PVC Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 80 mm

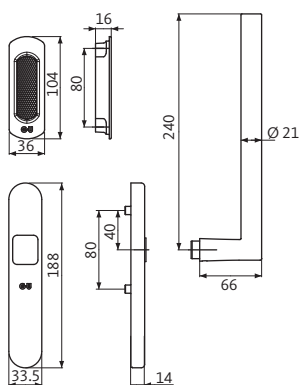

# BELCANTO series – interior turn handle without PC hole

with exterior flush pull



## Turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Set: BELCANTO interior turn handle, without PC hole	180°	Stainless steel	with lugs	no	1	K-17015-00-0-8
	90°	Stainless steel	with lugs	no	1	K-17020-00-0-8
Contents		Quantity				
BELCANTO interior turn handle, without PC hole		1				
Flush pull		1				
Square spindle (suitable for sash thicknesses up to 80 mm)		1				

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1


## BELCANTO series – interior turn handle with PC hole

without flush pull



### Product information

- High-quality stainless steel turn handle, interior, with PC hole
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 80 mm

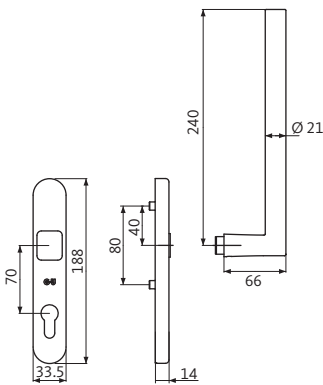

# BELCANTO series – interior turn handle with PC hole

without flush pull



## Turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Set: BELCANTO interior turn handle with PC hole	180°	Stainless steel	with lugs	yes	1	K-17014-00-0-8
	90°	Stainless steel	with lugs	yes	1	K-17019-00-0-8
Contents		Quantity				
BELCANTO interior turn handle, with PC hole		1				
Square spindle (suitable for sash thicknesses up to 80 mm)		1				

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	6-27272-01-0-1


## BELCANTO series – interior turn handle without PC hole

without flush pull



### Product information

- High-quality stainless steel turn handle, interior, without PC hole
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 80 mm

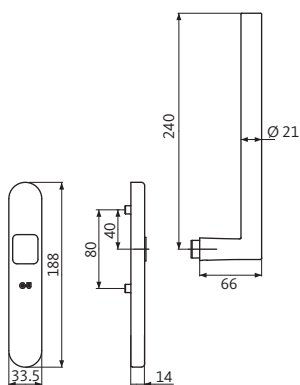



# BELCANTO series – interior turn handle without PC hole

without flush pull



## Turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Set: BELCANTO interior turn handle, without PC hole	180°	Stainless steel	with lugs	yes	1	K-17013-00-0-8
	90°	Stainless steel	with lugs	yes	1	K-17018-00-0-8
Contents		Quantity				
BELCANTO interior turn handle, without PC hole		1				
Square spindle (suitable for sash thicknesses up to 80 mm)		1				

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs


Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	6-27272-01-0-1

## BELCANTO series – interior/exterior handle set, with PC hole



### Product information

- High-quality stainless steel turn handles, interior and exterior, with PC hole
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber, PVC or aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 80 mm
- **Note:** We recommend the use of a buffer – see pages 260 + 261

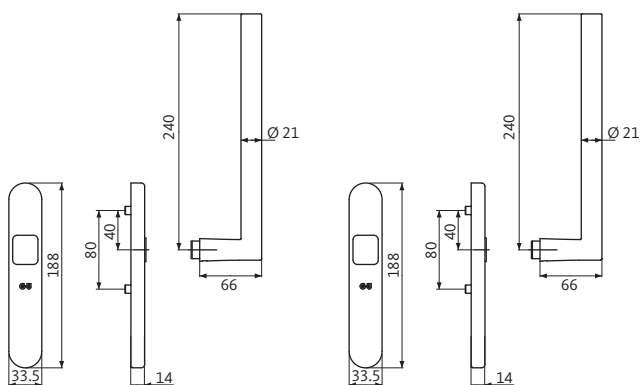

## Turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Set: BELCANTO turn handle on both sides, with PC hole	180°	Stainless steel	with lugs	yes	1	K-17017-00-0-8
	90°	Stainless steel	with lugs	yes	1	K-17022-00-0-8
Contents		Quantity				
BELCANTO turn handle on both sides, with PC hole		1				
Fixing screws M6 x 100 mm		2				
Square spindle (suitable for sash thicknesses up to 92 mm)		1				

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately in the event of deviating sash thicknesses.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	145	contained in the turn handle set
	68		
	78		
	88		
	90		
	92		
	110	170	9-27377-18-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	70	9-13274-70-0-1
	68	80	9-13274-80-0-1
	78	90	9-13274-90-0-1
	88	100	contained in the turn handle set
	90		
	92		
	110	125	9-13274-96-R-1

## Drilling jigs


Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	9-27272-01-0-1





### Product information

- High-quality stainless steel turn handles, optionally with
  - Dummy backplate
  - Profile cylinder hole (PC)
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Optionally with exterior handle or exterior flush pull
- Suitable for use with all customary Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16

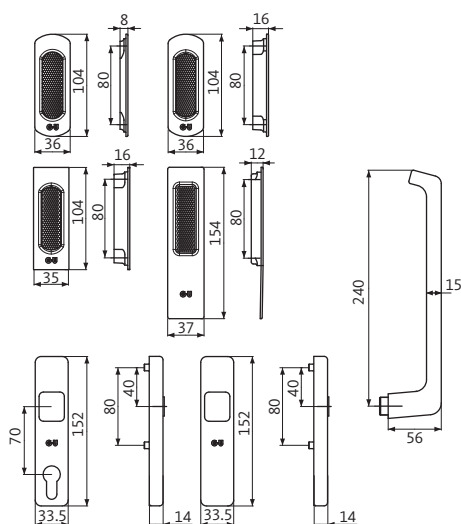

Some products in this series are suitable for




## DIRIGENT series – interior turn handle with PC hole

with exterior flush pull



### Product information

- High-quality stainless steel turn handle, interior, with PC hole
- Exterior flush pull
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber and PVC Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 70 mm

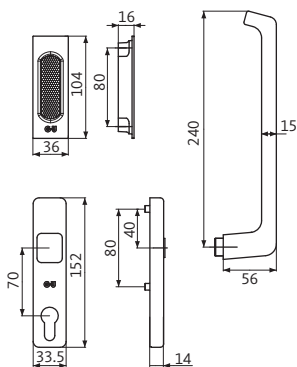

# DIRIGENT series – interior turn handle with PC hole

with exterior flush pull



## Turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Set: DIRIGENT interior turn handle, with PC hole	180°	Stainless steel	with lugs	yes	1	K-16794-00-0-8
	90°	Stainless steel	with lugs	yes	1	K-16860-00-0-8

Contents	Quantity
DIRIGENT interior turn handle, with PC hole	1
Flush pull	1
Square spindle (suitable for sash thicknesses up to 80 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1


## DIRIGENT series – interior turn handle with PC hole

with extended exterior flush pull



### Product information

- High-quality aluminium turn handle, interior, with PC hole
- Extended exterior flush pull
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber and PVC Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 70 mm

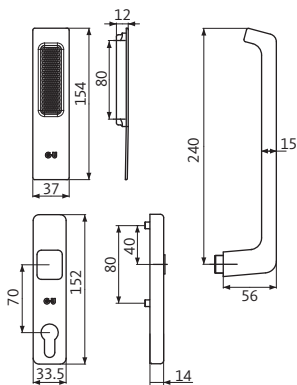



# DIRIGENT series – interior turn handle with PC hole

with extended exterior flush pull



## Turn handles

Versions/order numbers							
Description	Detent	Material	Version	Lockable	PU	Surface	Order no.
Set: DIRIGENT interior turn handle, with PC hole	180°	Aluminium	with lugs	yes	1	Silver/EV 1 look	K-13266-00-0-1
					1	Dark brown [1]	K-13266-00-0-5
					1	White, RAL 9016	K-13266-00-0-7
	90°	Aluminium	with lugs	yes	1	Silver/EV 1 look	K-13263-00-0-1
					1	Dark brown [1]	K-13263-00-0-5
					1	White, RAL 9016	K-13263-00-0-7

[1] Similar to RAL 8022

Contents	Quantity
DIRIGENT interior turn handle, with PC hole	1
Flush pull, extended	1
Square spindle (suitable for sash thicknesses up to 80 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1


## DIRIGENT series – interior turn handle, without PC hole

with exterior flush pull



### Product information

- High-quality stainless steel turn handle, interior, without PC hole
- Exterior flush pull
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber and PVC Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 70 mm

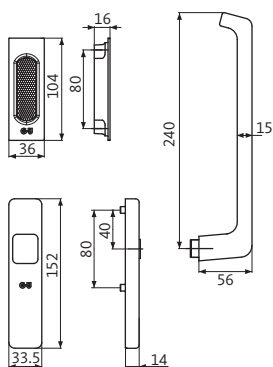

# DIRIGENT series – interior turn handle, without PC hole

with exterior flush pull



## Turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Set: DIRIGENT interior turn handle, without PC hole	180°	Stainless steel	with lugs	no	1	K-16793-00-0-8
	90°	Stainless steel	with lugs	no	1	K-16859-00-0-8

Contents	Quantity
DIRIGENT interior handle without PC hole	1
Flush pull	1
Square spindle (suitable for sash thicknesses up to 80 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1


## DIRIGENT series – interior turn handle, without PC hole

with extended exterior flush pull



### Product information

- High-quality aluminium turn handle, interior, without PC hole
- Extended exterior flush pull
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber and PVC Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thickness up to 68 mm, fixed square spindle
- Suitable for sash thickness from 69 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 70 mm

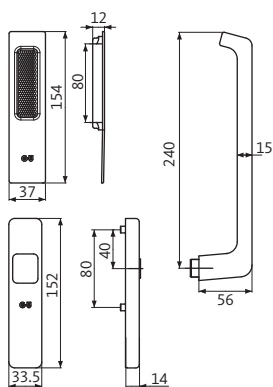

# DIRIGENT series – interior turn handle, without PC hole

with extended exterior flush pull



## Turn handles

Versions/order numbers								
Description	Detent	Sash thickness	Material	Version	Lockable	PU	Surface	Order no.
Set: DIRIGENT interior turn handle, without PC hole	180°	up to 68 mm [1]	Aluminium	with lugs	no	1	Silver/EV 1 look	K-13265-00-0-1
						1	Dark brown [3]	K-13265-00-0-5
						1	White, RAL 9016	K-13265-00-0-7
	180°	up to 110 mm [2]	Aluminium	with lugs	no	1	Silver/EV 1 look	K-13785-00-0-1
						1	Dark brown [3]	K-13785-00-0-5
						1	White, RAL 9016	K-13785-00-0-7
	90°	up to 68 mm [1]	Aluminium	with lugs	no	1	Silver/EV 1 look	K-13262-00-0-1
						1	Dark brown [3]	K-13262-00-0-5
						1	White, RAL 9016	K-13262-00-0-7
	90°	up to 110 mm [2]	Aluminium	with lugs	no	1	Silver/EV 1 look	K-13787-00-0-1
						1	Dark brown [3]	K-13787-00-0-5
						1	White, RAL 9016	K-13787-00-0-7

[1] Square spindle, fixed  
[2] Square spindle, adjustable  
[3] Similar to RAL 8022

Contents (with sash thickness up to 68 mm)	Quantity
DIRIGENT interior handle without PC hole	1
Flush pull, extended	1
Square spindle (suitable for sash thicknesses up to 68 mm)	1

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

Contents (with sash thickness up to 110 mm)	Quantity
DIRIGENT interior handle without PC hole	1
Flush pull, extended	1
Square spindle (suitable for sash thicknesses from 69 to 80 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

# DIRIGENT series – interior turn handle, without PC hole

with extended exterior flush pull



## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs


Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1

# DIRIGENT series – interior/exterior handle set, with PC hole



## Product information

- High-quality aluminium, stainless steel or brass turn handles, interior and exterior, with PC hole
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber, PVC or aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 70 mm
- Note: We recommend the use of a buffer – see pages 260 + 261

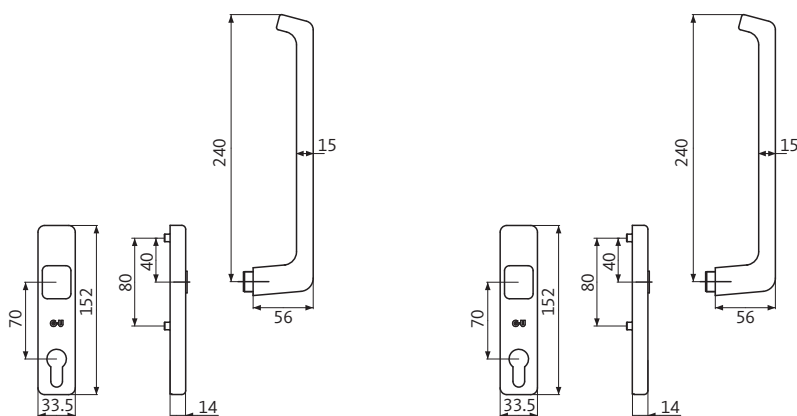

# DIRIGENT series – interior/exterior handle set, with PC hole



## Aluminium turn handles

Versions/order numbers							
Description	Detent	Material	Version	Lockable	PU	Surface	Order no.
Set: DIRIGENT turn handle on both sides, with PC hole	180°	Aluminium	with lugs	yes	1	Silver/EV 1 look	K-13267-00-0-1
					1	Dark brown [1]	K-13267-00-0-5
					1	White, RAL 9016	K-13267-00-0-7
	90°	Aluminium	with lugs	yes	1	Silver/EV 1 look	K-13264-00-0-1
					1	Dark brown [1]	K-13264-00-0-5
					1	White, RAL 9016	K-13264-00-0-7
For aluminium profiles only							
Set: DIRIGENT turn handle on both sides, with PC hole	180°	Aluminium	without lugs	yes	1	Silver/EV 1 look	6-24615-96-0-1
					1	Dark brown [1]	6-24615-96-0-5
					1	White, RAL 9016	6-24615-96-0-7
	90°	Aluminium	without lugs	yes	1	Silver/EV 1 look	6-24616-96-0-1
					1	Dark brown [1]	6-24616-96-0-5
					1	White, RAL 9016	6-24616-96-0-7

[1] Similar to RAL 8022

## Stainless-steel turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Set: DIRIGENT turn handle on both sides, with PC hole	180°	Stainless steel	with lugs	yes	1	K-16795-00-0-8
	90°	Stainless steel	with lugs	yes	1	K-16861-00-0-8

## Brass turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
Set: DIRIGENT turn handle on both sides, with PC hole	180°	Polished brass	with lugs	yes	1	6-26731-00-0-B
	90°	Polished brass	with lugs	yes	1	6-26732-00-0-B

## Contents: set, DIRIGENT turn handle: aluminium, stainless steel or brass

Contents (with version with lugs)	Quantity
DIRIGENT interior/exterior handle set, with PC hole	1
Fixing screws M6 x 100 mm	2
Square spindle (suitable for sash thicknesses up to 92 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately in the event of deviating sash thicknesses.

Contents (with version without lugs)	Quantity
DIRIGENT interior/exterior handle set, with PC hole	1
Square spindle (suitable for sash thicknesses up to 92 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.



## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	145	contained in the turn handle set
	68		
	78		
	88		
	90		
	92		
	110	170	9-27377-18-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	70	9-13274-70-0-1
	68	80	9-13274-80-0-1
	78	90	9-13274-90-0-1
	88	100	9-13274-97-R-3 *
	90	100	9-13274-97-R-3 *
	92	100	9-13274-97-R-3 *
	110	125	9-13274-96-R-1

\* Order only with version without lugs

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	9-27272-01-0-1


## DIRIGENT series – interior turn handle with PC hole

without flush pull



### Product information

- High-quality aluminium, stainless steel or brass turn handle, interior, with PC hole
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber, PVC or aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 70 mm

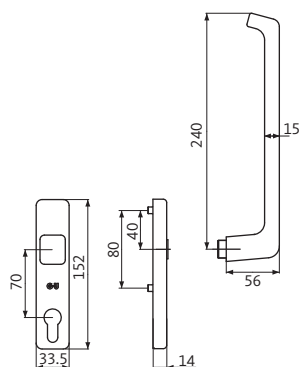

# DIRIGENT series – interior turn handle with PC hole

without flush pull



## Aluminium turn handles

Versions/order numbers							
Description	Detent	Material	Version	Lockable	PU	Surface	Order no.
For aluminium profiles only							
DIRIGENT interior turn handle, with PC hole	180°	Aluminium	with lugs	yes	1	Silver/EV 1 look	6-24607-00-0-1
					1	Dark brown [1]	6-24607-00-0-5
					1	White, RAL 9016	6-24607-00-0-7
	180°	Aluminium	without lugs	yes	1	Silver/EV 1 look	6-24609-00-0-1
					1	Dark brown [1]	6-24609-00-0-5
					1	White, RAL 9016	6-24609-00-0-7
	90°	Aluminium	without lugs	yes	1	Silver/EV 1 look	6-24614-00-0-1
					1	Dark brown [1]	6-24614-00-0-5
					1	White, RAL 9016	6-24614-00-0-7

[1] Similar to RAL 8022

## Stainless-steel turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
DIRIGENT interior turn handle, with PC hole	180°	Stainless steel	with lugs	yes	1	K-16805-00-0-8
	90°	Stainless steel	with lugs	yes	1	K-16865-00-0-8

## Brass turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
DIRIGENT interior turn handle, with PC hole	180°	Polished brass	with lugs	yes	1	6-26728-02-0-B
	90°	Polished brass	with lugs	yes	1	6-26729-02-0-B

## Contents: set, DIRIGENT turn handle: aluminium, stainless steel or brass

Contents	Quantity
DIRIGENT interior turn handle, with PC hole	1
Square spindle (suitable for sash thicknesses up to 80 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

# DIRIGENT series – interior turn handle with PC hole

without flush pull



## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	9-27272-01-0-1


# DIRIGENT series – interior turn handle, without PC hole

without flush pull



## Product information

- High-quality aluminium, stainless steel or brass turn handle, interior, without PC hole
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 70 mm

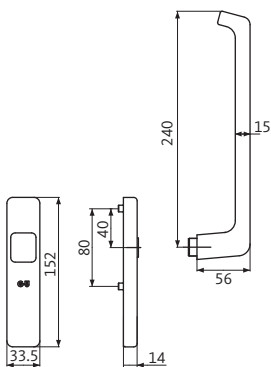

# DIRIGENT series – interior turn handle, without PC hole

without flush pull



## Aluminium turn handles

Versions/order numbers							
Description	Detent	Material	Version	Lockable	PU	Surface	Order no.
DIRIGENT interior turn handle, without PC hole	180°	Aluminium	with lugs	no	1	Silver/EV 1 look	6-24605-00-0-1 [2]
					1	Dark brown [1]	6-24605-00-0-5 [2]
					1	White, RAL 9016	6-24605-00-0-7 [2]
	180°	Aluminium	without lugs	no	1	Silver/EV 1 look	6-24608-00-0-1
					1	Dark brown [1]	6-24608-00-0-5
					1	White, RAL 9016	6-24608-00-0-7
	90°	Aluminium	without lugs	no	1	Silver/EV 1 look	6-24613-00-0-1
					1	Dark brown [1]	6-24613-00-0-5
					1	White, RAL 9016	6-24613-00-0-7

[1] Similar to RAL 8022 [2] Sash thickness up to 78 mm, square spindle not adjustable

## Stainless-steel turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
DIRIGENT interior turn handle, without PC hole	180°	Stainless steel	with lugs	no	1	K-16804-00-0-8

## Brass turn handles

Versions/order numbers						
Description	Detent	Material	Version	Lockable	PU	Order no.
DIRIGENT interior turn handle, without PC hole	180°	Polished brass	with lugs	no	1	6-26728-01-0-B
	90°	Polished brass	with lugs	no	1	6-26729-01-0-B

## Contents: set, DIRIGENT turn handle: aluminium, stainless steel or brass

Contents	Quantity
DIRIGENT interior handle without PC hole	1
Square spindle (suitable for sash thicknesses up to 80 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	6-27272-01-0-1


## DIRIGENT series – interior turn handle with PC hole

without flush pull, removable



### Product information

- High-quality aluminium turn handle, interior, with PC hole
- Removable, suitable for customer's own coating
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber, PVC or aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 74 mm

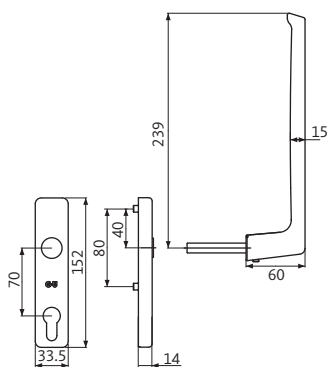



# DIRIGENT series – interior turn handle with PC hole

without flush pull, removable



## Turn handles

Versions/order numbers							
Description	Detent	Material	Version	Lockable	PU	Surface	Order no.
Set: DIRIGENT interior turn handle, with PC hole	180°	Aluminium	with lugs	yes	1	Silver/EV 1 look	K-17397-00-0-1
					1	Dark brown [1]	K-17397-00-0-5
					1	White, RAL 9016	K-17397-00-0-7
	For aluminium profiles only						
	180°	Aluminium	without lugs	yes	1	Silver/EV 1 look	K-17399-00-0-1
					1	Dark brown [1]	K-17399-00-0-5
					1	White, RAL 9016	K-17399-00-0-7
[1] Similar to RAL 8022							

Contents	Quantity
DIRIGENT interior turn handle, with PC hole	1
Square spindle (suitable for sash thicknesses up to 80 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws


Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	9-27272-01-0-1


## DIRIGENT series – interior turn handle, without PC hole

without flush pull, removable

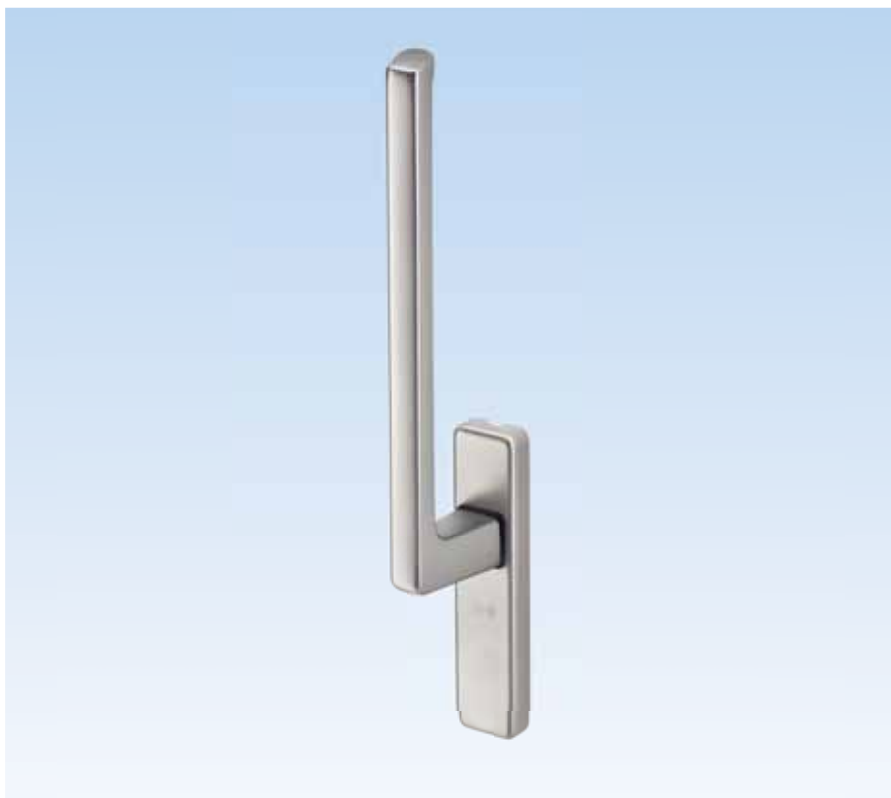

### Product information

- High-quality aluminium turn handle, interior
- Removable, suitable for customer's own coating
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber, PVC or aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 74 mm

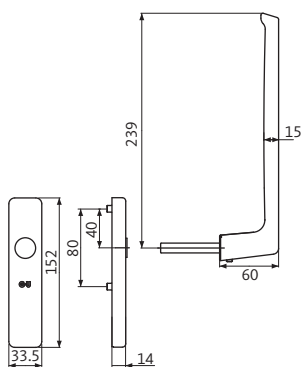

# DIRIGENT series – interior turn handle, without PC hole

without flush pull, removable



## Turn handles

Versions/order numbers							
Description	Detent	Material	Version	Lockable	PU	Surface	Order no.
Set: DIRIGENT interior turn handle, without PC hole	180°	Aluminium	with lugs	no	1	Silver/EV 1 look	K-17396-00-0-1
					1	Dark brown [1]	K-17396-00-0-5
					1	White, RAL 9016	K-17396-00-0-7
	For aluminium profiles only						
	180°	Aluminium	without lugs	no	1	Silver/EV 1 look	K-17398-00-0-1
					1	Dark brown [1]	K-17398-00-0-5
					1	White, RAL 9016	K-17398-00-0-7
[1] Similar to RAL 8022							

Contents	Quantity
DIRIGENT interior handle without PC hole	1
Square spindle (suitable for sash thicknesses up to 80 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	80	contained in the turn handle set
	68		
	78		
	88	90	9-24377-50-0-1
	90	90	9-24377-50-0-1
	92	90	9-24377-50-0-1
	110	100	9-24377-60-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	60	9-13274-60-0-1
	68	70	9-13274-70-0-1
	78	80	9-13274-80-0-1
	88	90	9-13274-90-0-1
	90	95	9-13274-95-R-1
	92	100	9-13274-97-R-3
	110	110	9-13274-98-R-3

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	9-27272-01-0-1


# DIRIGENT series – interior/exterior handle set, with PC hole

removable



## Product information

- High-quality aluminium turn handles, internal and external, with PC hole
- Removable, suitable for customer's own coating
- Version with 10 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber, PVC or aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- Suitable for sash thicknesses up to 110 mm, adjustable square spindle
- Handle length 240 mm  
Handle height 74 mm
- **Note:** We recommend the use of a buffer – see pages 260 + 261

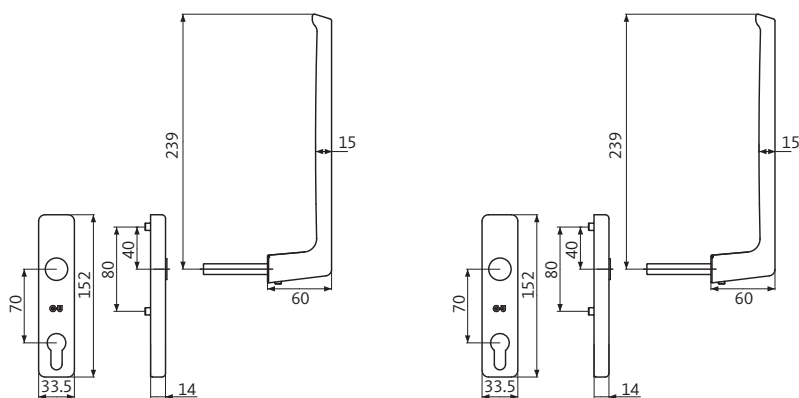

## Turn handles

Versions/order numbers							
Description	Detent	Material	Version	Lockable	PU	Surface	Order no.
Set: DIRIGENT turn handle on both sides, with PC hole	180°	Aluminium	with lugs	yes	1	Silver/EV 1 look	K-17400-00-0-1
					1	Dark brown [1]	K-17400-00-0-5
					1	White, RAL 9016	K-17400-00-0-7

[1] Similar to RAL 8022

Contents	Quantity
DIRIGENT interior/exterior handle set, with PC hole	1
Square spindle (suitable for sash thicknesses up to 92 mm)	1

**Note about square spindle:** If the sash thicknesses differ, the square spindle must be ordered separately.

**Note about fixing screws:** The fixing screws must be ordered separately depending on the sash thickness.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 10 mm	56	145	contained in the turn handle set
	68		
	78		
	88		
	90		
	92		
	110	170	9-27377-18-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	70	9-13274-70-0-1
	68	80	9-13274-80-0-1
	78	90	9-13274-90-0-1
	88	100	9-13274-97-R-3
	90	100	9-13274-97-R-3
	92	100	9-13274-97-R-3
	110	125	9-13274-96-R-1

## Drilling jigs

Versions/order numbers			
Drilling jigs	PU	Order no.	
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1	
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1	
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	9-27272-01-0-1	


## DIRIGENT series – interior HL turn handle, without PC hole

for light Lift&Slide elements



### Product information

- High-quality aluminium turn handle, interior, without PC hole
- Version with 7 mm square spindle  
Distance between screw centres 43 mm
- The square spindle can be enlarged to 10 mm (requires handle adapter set K-16554-01-0-1)
- Suitable for use with all customary timber, PVC or aluminium Lift&Slide profile systems for up to 120 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16
- For sash thicknesses up to 56 mm
- Handle length 160 mm  
Handle height 58 mm

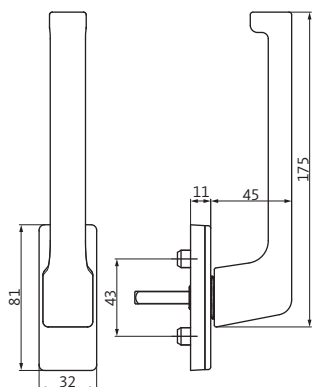

# DIRIGENT series – interior HL turn handle, without PC hole

for light Lift&Slide elements



## Versions/order numbers – turn handle

Description	Material	Version	Lockable	PU	Surface	Order no.
DIRIGENT HL interior turn handle, without PC hole	Aluminium	with lugs	no	1	Silver/EV 1 look	6-31809-37-0-1
				1	Dark brown [1]	6-31809-37-0-5
				1	White, RAL 9016	6-31809-37-0-7

[1] Similar to RAL 8022

## Versions/order numbers – required accessories

Description	Contents	PU	Order no.
Handle adapter set	1 x fixing plate 43 1 x reduction sleeve 10/7 2 x countersunk screw M5 x 22 mm 2 x press-in screw socket	1	K-16554-01-0-1


## DIRIGENT series – interior/exterior handle set, with PC hole

cranked flat on the outside – exterior height 20 mm



### Product information

- High-quality aluminium turn handles, internal and external, with PC hole
- Version with 8 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber, PVC or aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 17
- Suitable for sash thickness up to 110 mm, square spindle can be shortened to necessary sash thickness
- Interior handle
  - Handle length 240 mm
  - Handle height 70 mm
- Exterior handle
  - Handle length 230 mm
  - Handle height 15 mm
  - Rosette height 20 mm
- **Note:** We recommend the use of a buffer – see pages 260 + 261

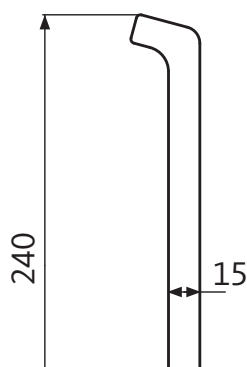



## Turn handles

Versions/order numbers							
Description	Detent	Material	Version	Lockable	PU	Surface	Order no.
Set: DIRIGENT turn handle on both sides, with PC hole	90°	Aluminium	with lugs	yes	1	Silver/EV 1 look	K-13167-00-0-1
					1	Dark brown [1]	K-13167-00-0-5
					1	White, RAL 9016	K-13167-00-0-7

[1] Similar to RAL 8022

Contents	Quantity
DIRIGENT interior/exterior handle set, with PC hole	1
Fixing screws M6 x 85 mm (suitable for sash thicknesses up to 68 mm)	2
Square spindle (suitable for all sash thicknesses)	1

### Note about square spindle:

The square spindle must be shortened to the right size depending on the sash thickness.

### Note about fixing screws:

The fixing screws must be ordered separately in the event of deviating sash thicknesses.

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	85	contained in the turn handle set
	68	80	
	78	90	9-13274-90-0-1
	88	100	9-13274-97-R-3
	90	100	9-13274-97-R-3
	92	100	9-13274-97-R-3
	110	125	9-13274-96-R-1



## Reduction insert

for mounting 8 mm square spindles  
in 10 mm square spindle mounts

Versions/order numbers		
Description	PU	Order no.
Reduction insert	1	9-43986-00-0-1

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	9-27272-01-0-1


## DIRIGENT series – interior/exterior handle set, with PC hole

flat on the outside – exterior height 30 mm



### Product information

- High-quality aluminium turn handles, internal and external, with PC hole
- Version with 8 mm square spindle  
Distance between screw centres 80 mm
- Suitable for use with all customary timber, PVC or aluminium Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 17
- Suitable for sash thickness up to 110 mm, square spindle can be shortened to necessary sash thickness
- Interior handle
  - Handle length 240 mm
  - Handle height 70 mm
- Exterior handle
  - Handle length 228.5 mm
  - Handle height 30 mm
- **Note:** We recommend the use of a buffer – see pages 260 + 261

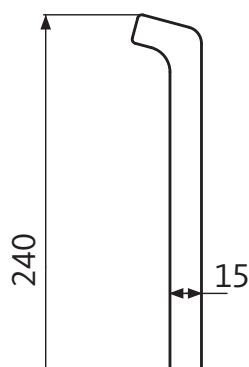

# DIRIGENT series – turn handle on both sides, with PC hole

flat on the outside – exterior height 30 mm



## Turn handles

Versions/order numbers							
Description	Detent	Material	Version	Lockable	PU	Surface	Order no.
Set: DIRIGENT turn handle on both sides, with PC hole	90°	Aluminium	with lugs	yes	1	Silver/EV 1 look	K-12919-00-0-1
					1	Dark brown [1]	K-12919-00-0-5
					1	White, RAL 9016	K-12919-00-0-7

[1] Similar to RAL 8022

Contents	Quantity
DIRIGENT interior/exterior handle set, with PC hole	1
Fixing screws M6 x 75 mm (suitable for sash thicknesses up to 56 mm)	2
Square spindle (suitable for sash thicknesses up to 92 mm)	1

### Note about square spindle:

The square spindle must be shortened to the right size depending on the sash thickness. Order separately for sash thickness > 92 mm.

### Note about fixing screws:

The fixing screws must be ordered separately in the event of deviating sash thicknesses.

## Square spindle

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
Square spindle 8 mm	up to 88	90	contained in the turn handle set
	> 88	135	
	> 88	150	9-30482-96-0-1

## Fixing screws

Versions/order numbers			
Description	Sash thickness [mm]	Length [mm]	Order no.
M6 fixing screws	56	75	contained in the turn handle set
	68	80	9-13274-80-0-1
	78	90	9-13274-90-0-1
	88	100	9-13274-97-R-3
	90	100	9-13274-97-R-3
	92	100	9-13274-97-R-3
	110	125	9-13274-96-R-1



## Reduction insert

for mounting 8 mm square spindles in 10 mm square spindle mounts

Versions/order numbers		
Description	PU	Order no.
Reduction insert	1	9-43986-00-0-1

## Drilling jigs

Versions/order numbers		
Drilling jigs	PU	Order no.
Drilling jig for the installation of turn handles – timber profiles	1	6-35524-00-0-1
Drilling jig for the installation of turn handles – PVC profiles	1	9-27272-00-0-1
Drilling jig for the installation of turn handles – aluminium profiles with Euro-groove	1	9-27272-01-0-1


## Accessories

### Flush pull, round



#### Product information


- High-quality flush pull made of stainless steel
- Distance between screw centres 80 mm
- Suitable for use with all customary Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16



Flush pull made of stainless steel

Description	GU logo	Overall depth	Version	PU	Surface	Order no.
Flush pull, round	yes	6 mm	without lugs	1	Silver/EV 1 look	9-46686-00-0-1
				1	Dark brown [1]	9-46686-00-0-5
				1	White, RAL 9016	9-46686-00-0-7
				1	Stainless steel	9-46686-00-0-8
Flush pull, round	yes	6 + 3 mm	with lugs (3 mm)	1	Stainless steel	9-46686-01-0-8

[1] Similar to RAL 8022



Flush pull made of stainless steel

Description	GU logo	Overall depth	Version	PU	Surface	Order no.
Flush pull, round	yes	14 mm	without lugs	1	Stainless steel	9-39035-01-0-8
Flush pull, round	no	14 mm	without lugs	1	Stainless steel	9-39035-02-0-8


## Accessories

### Flush pull, square



#### Product information


- High-quality flush pull made of stainless steel, aluminium or brass
- Distance between screw centres 80 mm
- Suitable for use with all customary Lift&Slide profile systems for up to 400 kg sash weight
- Durability test with 25,000 cycles in compliance with DIN 13126 part 16



### Flush pull made of stainless steel


Description	GU logo	Overall depth	Version	PU	Surface	Order no.
Flush pull, square	yes	14 mm	without lugs	1	Stainless steel	9-42539-01-0-8
Flush pull, square	no	14 mm	without lugs	1	Stainless steel	9-42539-02-0-8
Flush pull Se, square	no	12 mm	without lugs	1	Silver/EV 1 look	9-29622-00-0-1
				1	Dark brown [1]	9-29622-00-0-5
				1	White, RAL 9016	9-29622-00-0-7
				1	Stainless steel	9-29622-00-0-8

[1] Similar to RAL 8022



### Flush pull made of stainless steel


Description	GU logo	Overall depth	Version	PU	Surface	Order no.
Flush pull, square	yes	10 mm	without lugs	1	Stainless steel	9-42737-01-0-8
Flush pull, square	no	10 mm	without lugs	1	Stainless steel	9-42737-00-0-8



### Flush pull, aluminium

Description	GU logo	Overall depth	Version	PU	Surface	Order no.
Flush pull MS, square	yes	10 mm	without lugs	1	Silver/EV 1 look	9-29992-02-0-1
				1	Dark brown [1]	9-29992-02-0-5
				1	White, RAL 9016	9-29992-02-0-7
Flush pull MS, square	yes	11 mm	without lugs	1	Silver/EV 1 look	9-29992-01-0-1
				1	Dark brown [1]	9-29992-01-0-5
				1	White, RAL 9016	9-29992-01-0-7
Flush pull, square	yes	16 mm	without lugs	1	Silver/EV 1 look	9-29526-00-0-1
				1	Dark brown [1]	9-29526-00-0-5
				1	White, RAL 9016	9-29526-00-0-7

[1] Similar to RAL 8022



### Flush pull, brass

Description	GU logo	Overall depth	Version	PU	Surface	Order no.
Flush pull MS, square	yes	14 mm	without lugs	1	Brass	9-34957-00-0-B

Accessories

Service handle, cover rosette



DIRIGENT service handle

Versions/order numbers			
Description	PU	Surface	Order no.
DIRIGENT service handle, handle length 240 mm	1	Silver/EV 1 look	6-24619-00-0-1
	1	Dark brown [1]	6-24619-00-0-5
	1	White, RAL 9016	6-24619-00-0-7
[1] Similar to RAL 8022			



Interior cover rosette  
without PC hole

Versions/order numbers			
Description	PU	Surface	Order no.
Interior cover rosette without PC hole	1	Silver/EV 1 look	6-23243-01-0-1
	1	Dark brown [1]	6-23243-01-0-5
	1	White, RAL 9016	6-23243-01-0-7
[1] Similar to RAL 8022			



Interior cover rosette  
with PC hole

Versions/order numbers			
Description	PU	Surface	Order no.
Interior cover rosette with PC hole	1	Silver/EV 1 look	6-23243-02-0-1
	1	Dark brown [1]	6-23243-02-0-5
	1	White, RAL 9016	6-23243-02-0-7
[1] Similar to RAL 8022			





### Exterior cover rosette

#### Versions/order numbers

Description	PU	Surface	Order no.
Exterior cover rosette	1	Silver/EV 1 look	9-29527-00-0-1
	1	Dark brown [1]	9-29527-00-0-5
	1	White, RAL 9016	9-29527-00-0-7

[1] Similar to RAL 8022



### Set of cover discs

#### Versions/order numbers

Description	PU	Surface	Order no.
Set of cover discs	1	Silver/EV 1 look	K-17481-00-0-1
	1	Dark brown [1]	K-17841-00-0-5
	1	Black	K-17841-00-0-6
	1	White, RAL 9016	K-17841-00-0-7
	1	Stainless steel appearance	K-17841-00-0-8

#### Contents

- 1 x cover disc
- 1 x socket
- 1 x countersunk sheet metal screw 3.9 x 13 mm

[1] Similar to RAL 8022

# Accessories

## Gasket plates



### Gasket plate for exterior and interior turn handle

The optional gasket plate which is universally applicable for all handle models provides increased tightness, especially in Blower Door Tests. The profile cylinder insert is removable so the gasket ensures optimal sealing for all handle variants.

Versions/order numbers			
Description	PU	Surface	Order no.
Gasket plate for turn handle	1	black	9-47210-01-0-6



### Gasket plate for flush pull

The optional gasket plate which is universally applicable for all flush pulls provides increased tightness, especially in Blower Door Tests. The adaptable gasket plate ensures optimal sealing for all flush pull models.

Versions/order numbers			
Description	PU	Surface	Order no.
Gasket plate for flush pull	1	black	9-47211-01-0-6



### Square spindles

The length of the optional square spindles must be determined depending on the spindle hole depth of the lock case. Wrongly dimensioned or short square spindles are not permissible as they cause damage to the window gear and the turn handle.

#### Versions/order numbers

Description	Sash thickness [mm]	Interior turn handle / exterior flush pull / exterior cover rosette		Turn handle on both sides	
		Length [mm]	Order no.	Length [mm]	Order no.
Square spindle 10 mm	56	80	9-24377-40-0-1	145	9-24377-96-0-1
	68	80	9-24377-40-0-1	145	9-24377-96-0-1
	78	80	9-24377-40-0-1	145	9-24377-96-0-1
	88	90	9-24377-50-0-1	145	9-24377-96-0-1
	90	90	9-24377-50-0-1	145	9-24377-96-0-1
	92	90	9-24377-50-0-1	145	9-24377-96-0-1
	110	100	9-24377-60-0-1	170	9-24377-18-0-1



### Reduction insert


for mounting 8 mm square spindles in 10 mm square spindle mounts

#### Versions/order numbers

Description	PU	Order no.
Reduction insert	1	9-43986-00-0-1

# Accessories

## Fixing screws



### Fixing screws

The approved Lift&Slide handles must be screwed into the mounting thread of the gear lock case using 2 metric screws M6 x length. Make sure that the full length of the threads is used. Fastening the handles on the sash using screws for timber constructions is not permitted.

Versions/order numbers					
Description	Sash thickness [mm]	Interior turn handle / exterior flush pull / exterior cover rosette		Turn handle on both sides	
		Length [mm]	Order no.	Length [mm]	Order no.
Fixing screw M6	56	60	9-13274-60-0-1	70	9-13274-70-0-1
	68	70	9-13274-70-0-1	80	9-13274-80-0-1
	78	80	9-13274-80-0-1	90	9-13274-90-0-1
	88	100	9-13274-90-0-1	100	9-13274-97-R-3
	90	100	9-13274-95-R-3	100	9-13274-97-R-3
	92	100	9-13274-97-R-3	100	9-13274-97-R-3
	110	110	9-13274-98-R-3	125	9-13274-96-R-1