



03T.12



AUTOMATIC KEY-OPERATED LOCK

SECURY Automatic Cutout.....	03T.12.3
SECURY Automatic Extension Cutout.....	03T.12.4
Reverse Latches & Connect Automatic Extension.....	03T.12.5
Keepers	03T.12.6
BELCANTO handle & EU Rosettes.....	03T.12.8
BELCANTO handle & EU Rosettes Cutout.....	03T.12.9
Round Straight Pull Handle.....	03T.12.10
45° Angle Straight Pull Handle.....	03T.12.11
Rectangular Straight Pull Handle.....	03T.12.12
Pull Handle Cutout.....	03T.12.13
Accessories	03T.12.14
SALTO Profile Cylinders For Smart Lock.....	03T.12.15
6-C0140-08/12/18-O-XX - Pull Handle Round Installation Instructions.....	03T.12.16
6-C0145-08/12/18-O-XX - Pull Handle Round Angle Installation Instructions	03T.12.17
6-C0150-12-O-XX - Pull Handle Rectangular Installation Instructions	03T.12.18
K-C0340-08/12/18-P-XX - Pull Handles Round Installation Instructions	03T.12.19
K-C0345-08/12/18-P-XX - Pull Handles Round Angle Installation Instructions	03T.12.20
K-C0340-12-P-XX - Pull Handles Rectangular Installation Instructions	03T.12.21




Door Multi-point Locking System

SECURY Automatic European Profile Cylinder Door Lock for Lever Handle

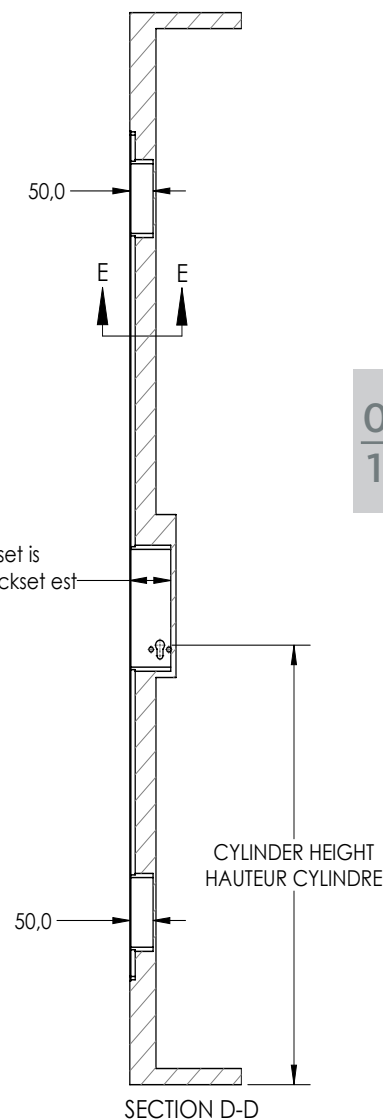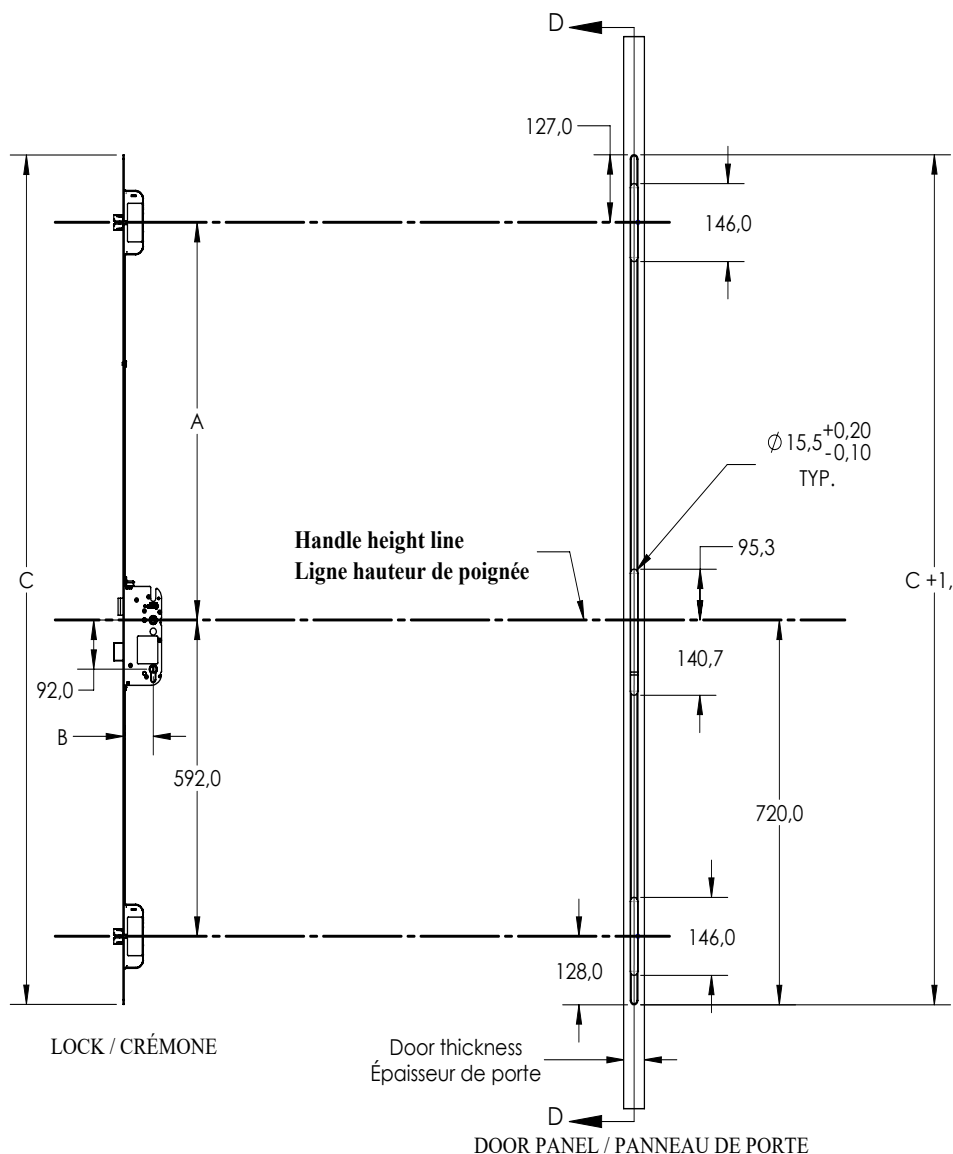

DOOR PANEL / PANNEAU DE PORTE

Reference number	B	A	C
6-40526-01-R-8B	35 mm	744 mm	1590 mm
6-40526-02-R-8B	35 mm	1054 mm	1900 mm
6-40526-03-R-8B	45 mm	744 mm	1590 mm
6-40526-04-R-8B	45 mm	1054 mm	1900 mm
6-40526-05-R-8B	55 mm	744 mm	1590 mm
6-40526-06-R-8B	55 mm	1054 mm	1900 mm
6-40526-07-R-8B	65 mm	744 mm	1590 mm
6-40526-08-R-8B	65 mm	1054 mm	1900 mm

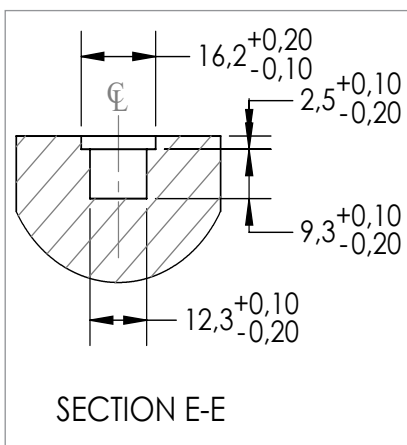


NOTE:

When using lever handle operation, please check handle height first. All dimensions must be verified on a prototype before production. Observe the proper slab to jamb clearance of 3-4mm.

Veuillez d'abord vérifier la hauteur de la poignée avant d'utiliser la poignée à levier. Toutes les dimensions doivent être vérifiées sur un prototype avant production. Respectez 3 à 4 mm de dégagement entre la dalle et le montant de porte.

Door Multi-point Locking System

Extensions for SECURY Automatic European Profile Cylinder Door Lock

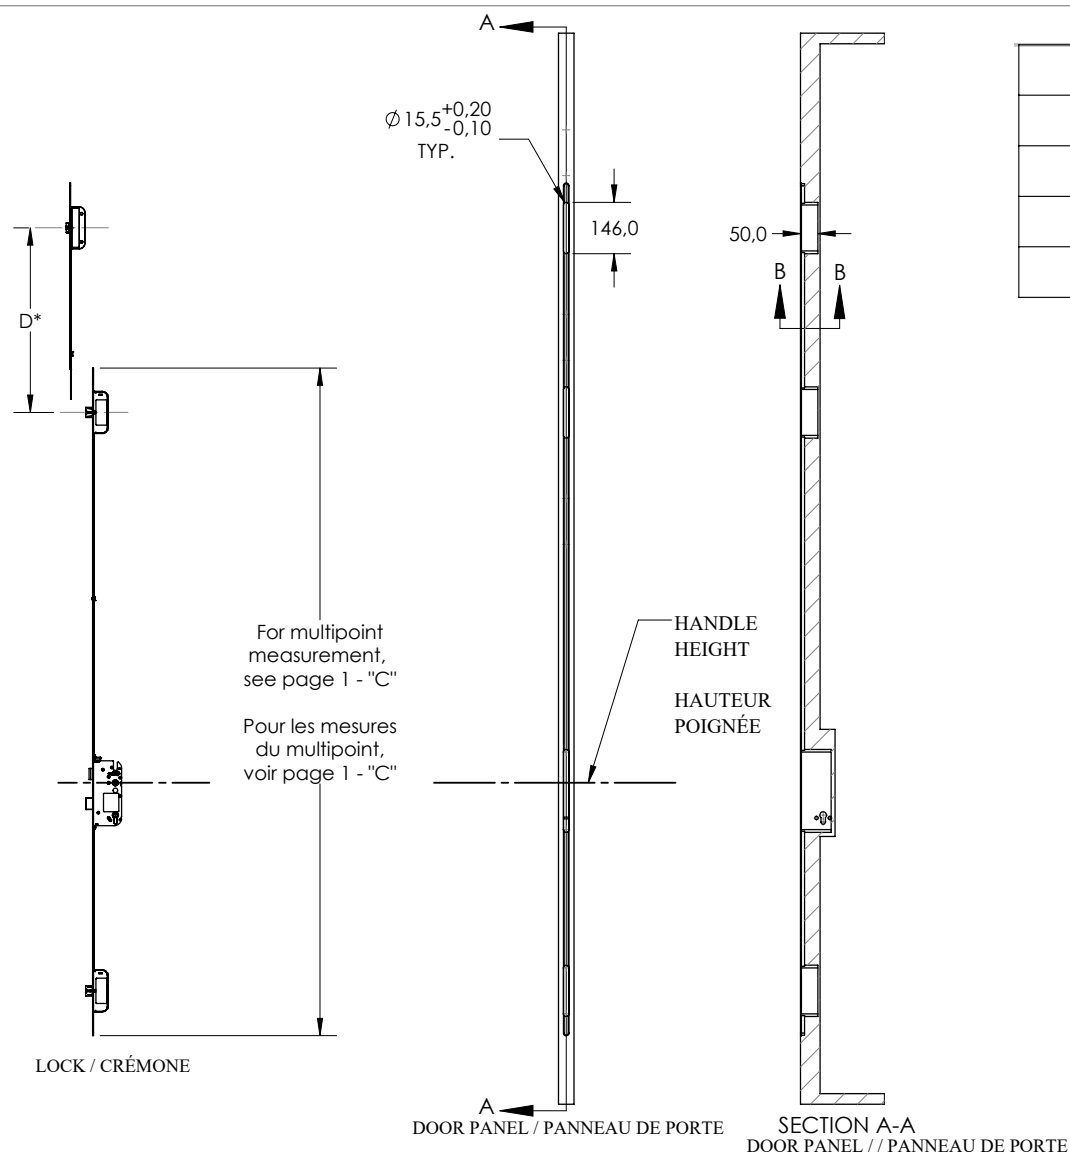

Reference number	D
6-33479-04-0-8B	525 mm
6-C5078-00-0-8B	800 mm
6-C5062-10-0-8B	1050 mm
6-C5062-13-0-8B	1325 mm


NOTES:

All dimensions must be verified on a prototype before production
Observe the proper slab to jamb clearance of 3-4mm

*Optional up to 2 extensions

Toutes les diemsons doivent être vérifiées sur un prototype avant production
Respectez 3 à 4 mm de dégagement entre la dalle et le montant de porte

*Optionel jusqu'a 2 extensions

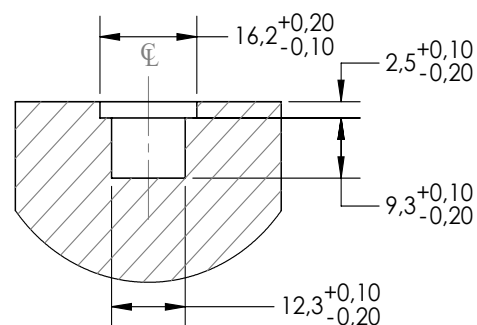


SECTION B-B

Door Multi-point Locking System


Reverse Latches & Connect Automatic Extension



REVERSE LATCH (Use flathead screwdriver)

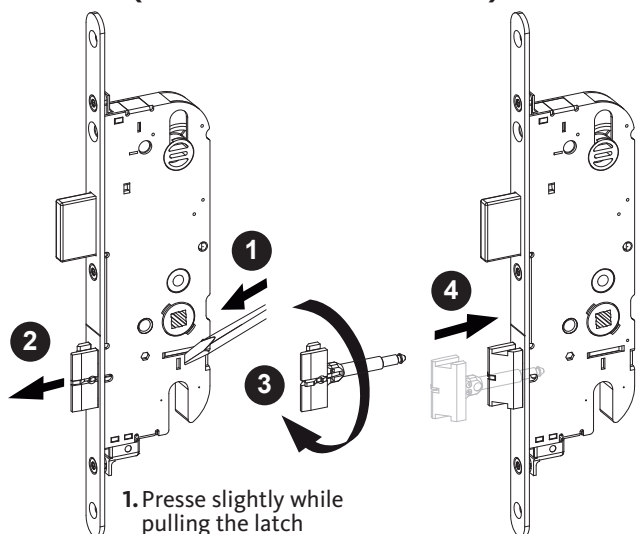


REVERSE AUTOMATIC LATCH (Use 4mm Allen T-key H-00345-04-0-0)

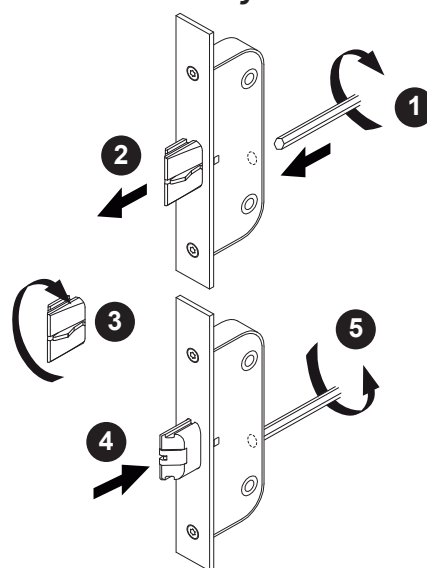

03
12


CONNECT AUTOMATIC EXTENSIONS TO DOOR LOCK (Use Torx 15 T-key H-00346-15-0-0)

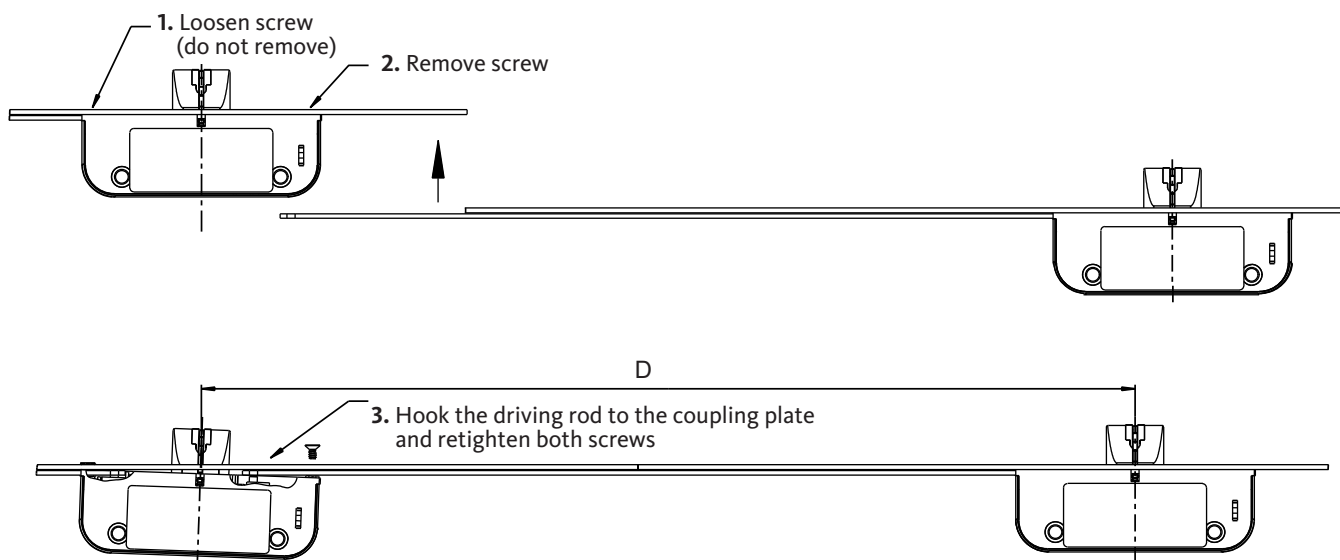




Top & Bottom Keeper

Description	Part Number
Keeper for 45mm (1 3/4") thick doors	9-C4776-45-0-*
Keeper for 57mm (2 1/4") thick doors	9-C4776-57-0-*

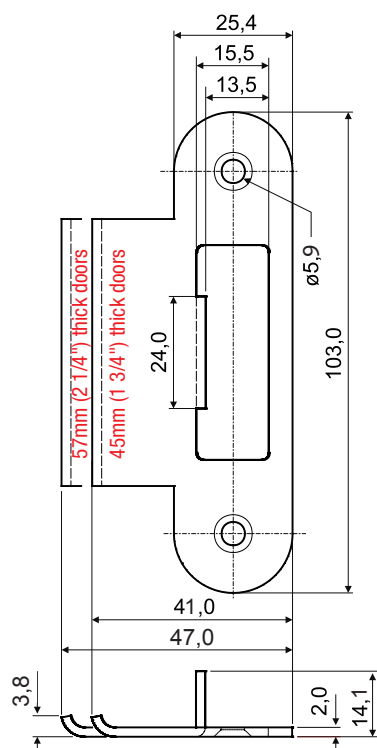


Middle Keeper

Description	Part Number
Keeper for 45mm (1 3/4") thick doors	9-C4777-45-0-*
Keeper for 57mm (2 1/4") thick doors	9-C4777-57-0-*

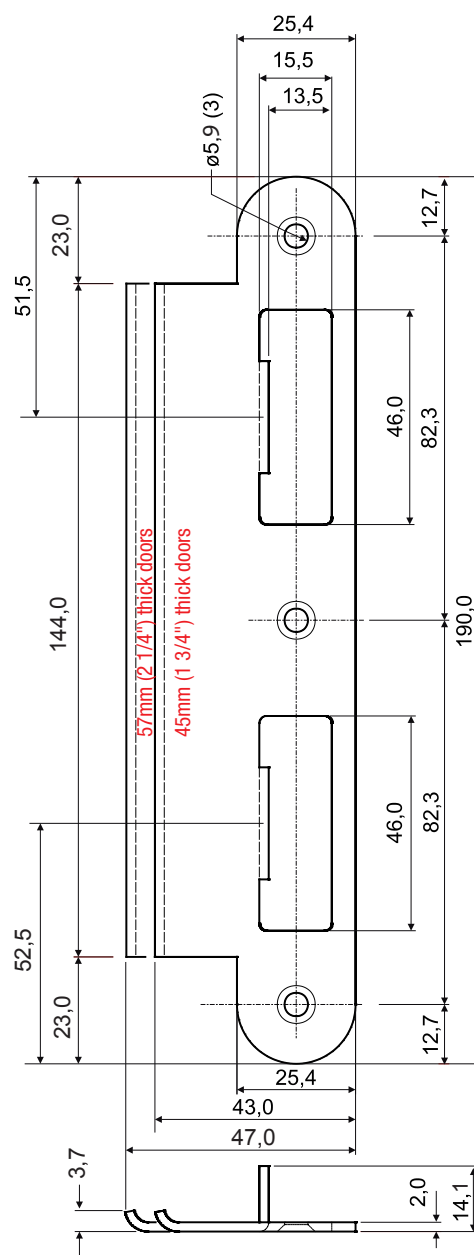


Door Multi-point Locking System

Keepers

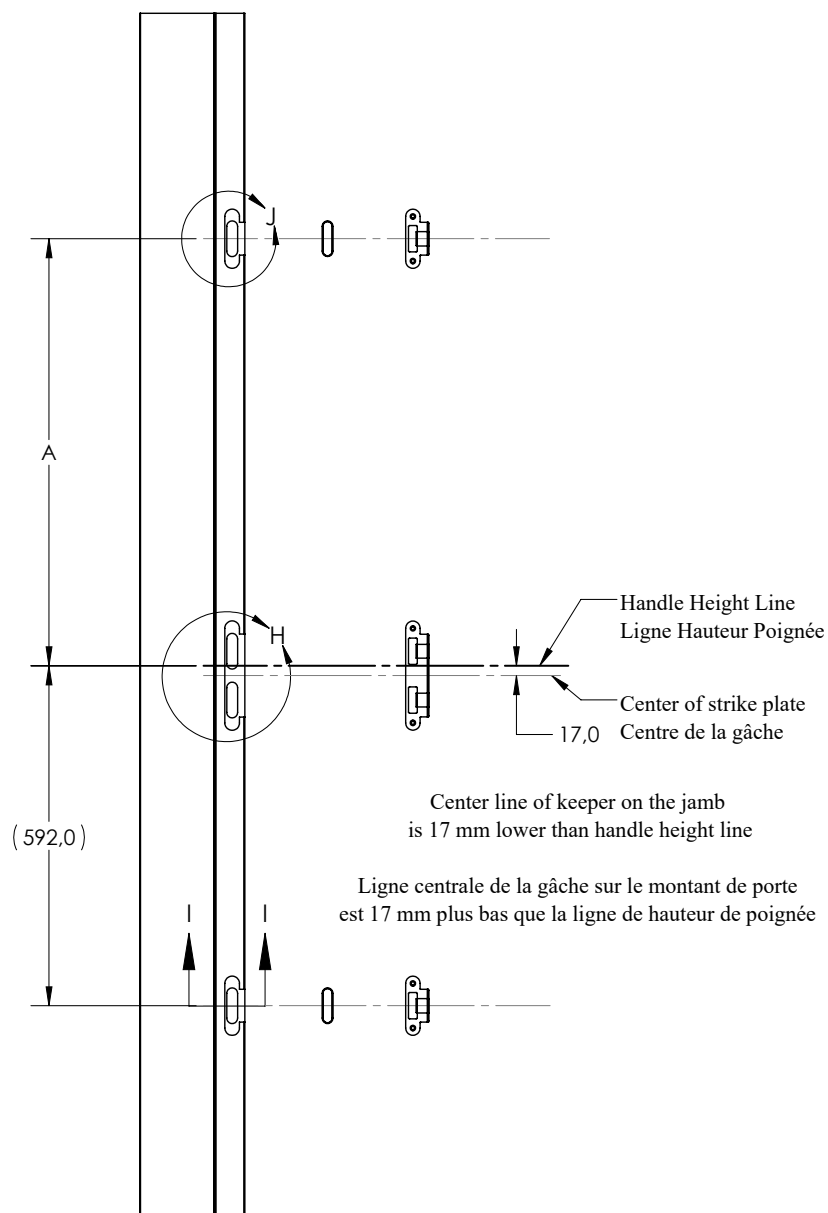


JAMB / MONTANT DE PORTE

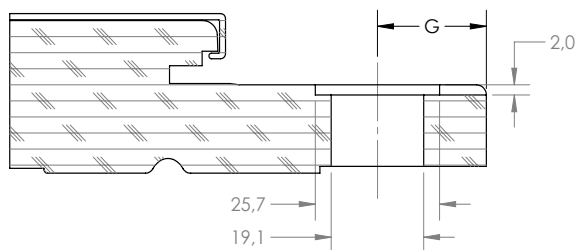


SECTION I-I

Door Thickness	G
1 3/4"	22.5 mm
2 1/4"	28.5 mm
3"	38.0 mm

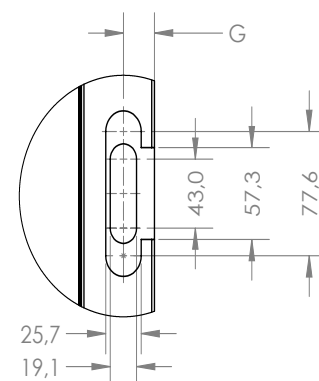

2X DETAIL J

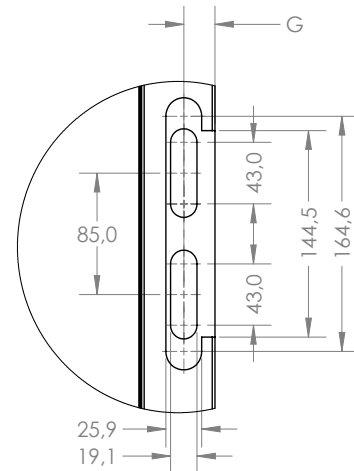

DETAIL H


Note:

Center line of door lock will position itself with the center line of the strike plate measurement - G
Keepers' position must be as specified, otherwise it could alter the locking
Latches should engage in the keepers without friction

La ligne centrale de la serrure de porte se positionnera avec la ligne centrale de la gâche - G
La position des gâches doit être telle que spécifiée, sinon elle pourrait modifier le verrouillage
Les pènes doivent s'engager dans les gâches sans friction

Door Multi-point Locking System

BELCANTO Handles & EU Rosettes

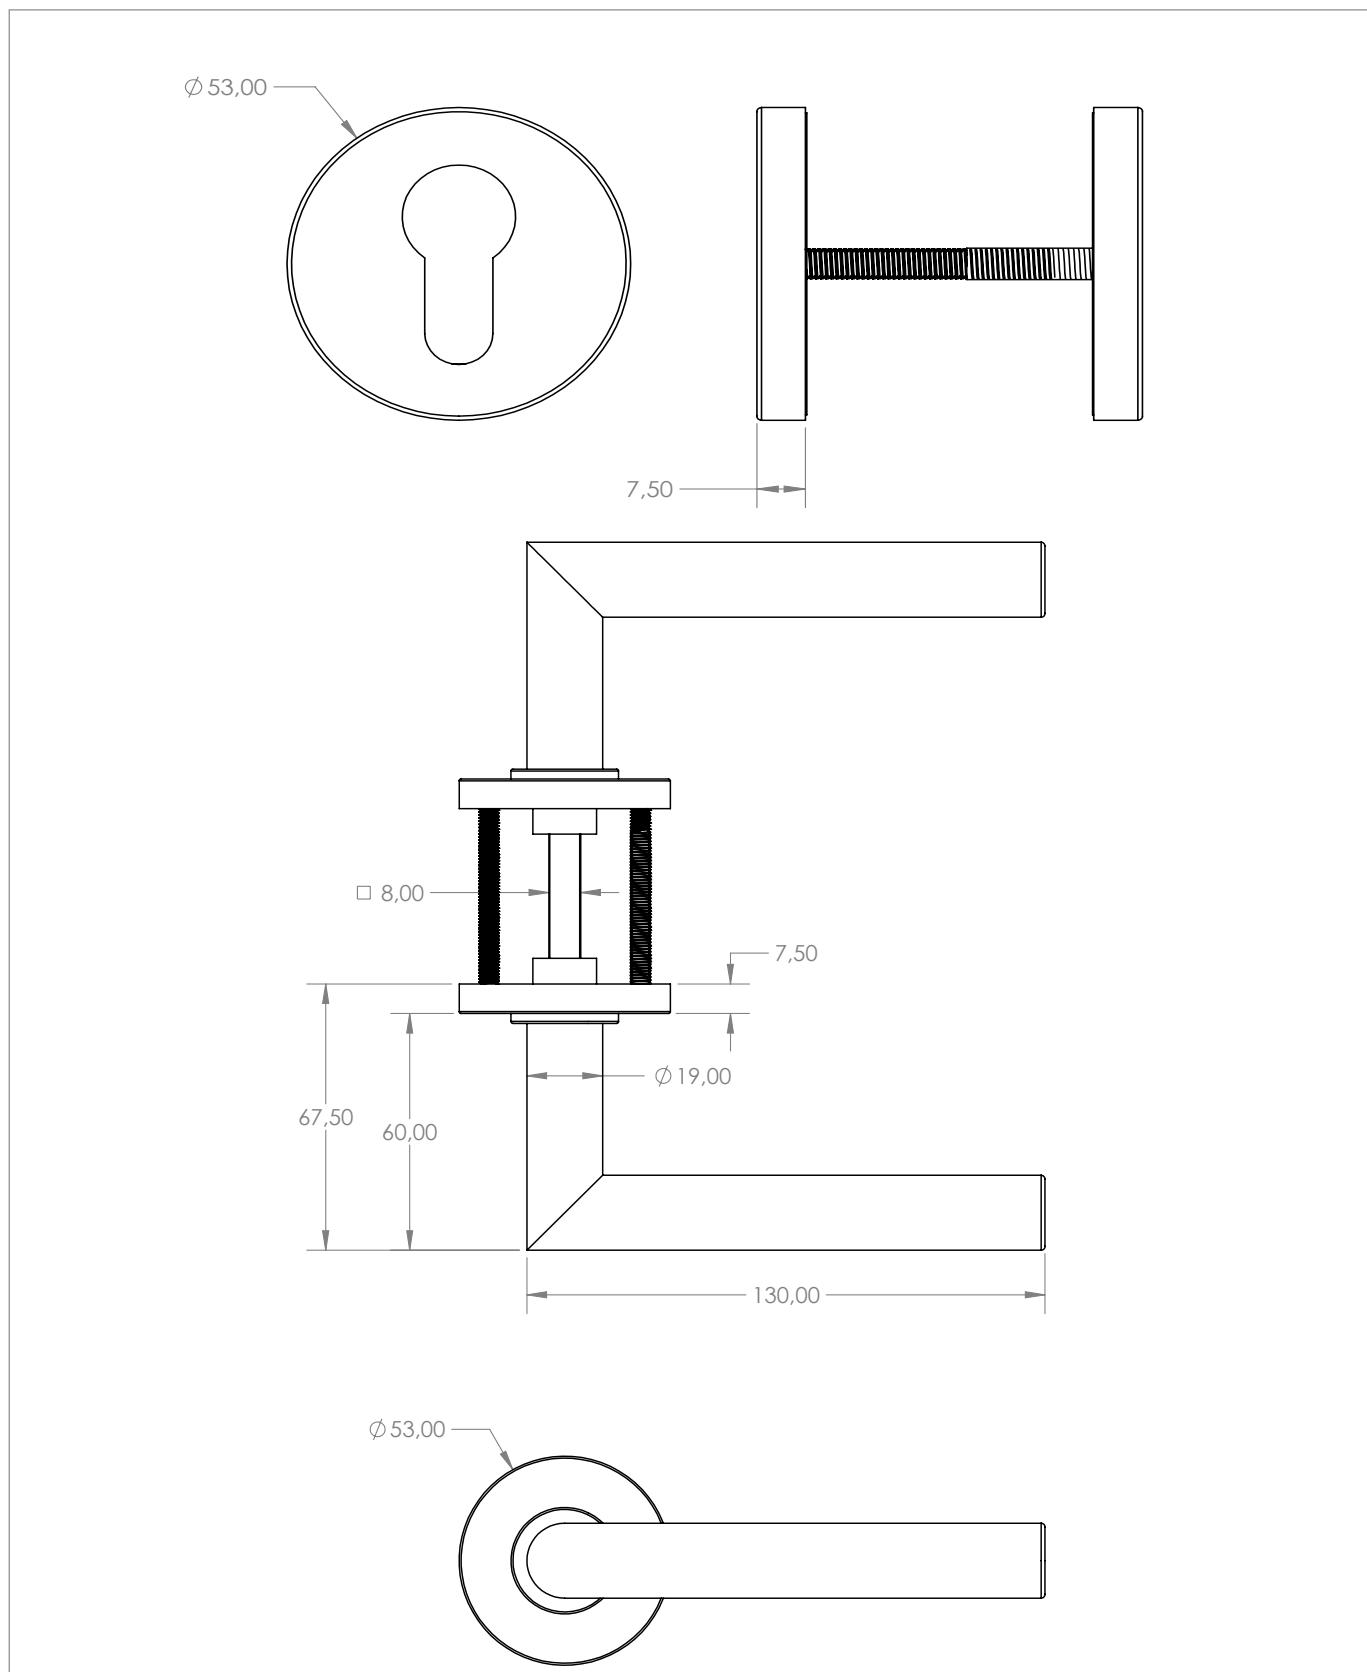

Door Multi-point Locking System

Profile Cylinder & Handle Set Cutout CNC Version



CNC - Cutout

Handle Height as
per line on faceplate

Hauteur Poignée
comme ligne sur faceplate

Haut

Top of
door

Cylinder Height
Hauteur Cylindre

Door edge
Bord de porte

Bottom of
door

Bas


03
12

Door Multi-point Locking System

Round Straight Pull Bar



	6-C0140-08-0-XX / K-C0340-08-0-XX	6-C0140-12-0-XX / K-C0340-12-0-XX	6-C0140-18-0-XX / K-C0340-18-0-XX
Length (A)	800mm	1200mm	1800mm
Fixing centers (B)	600mm	1000mm	1400mm


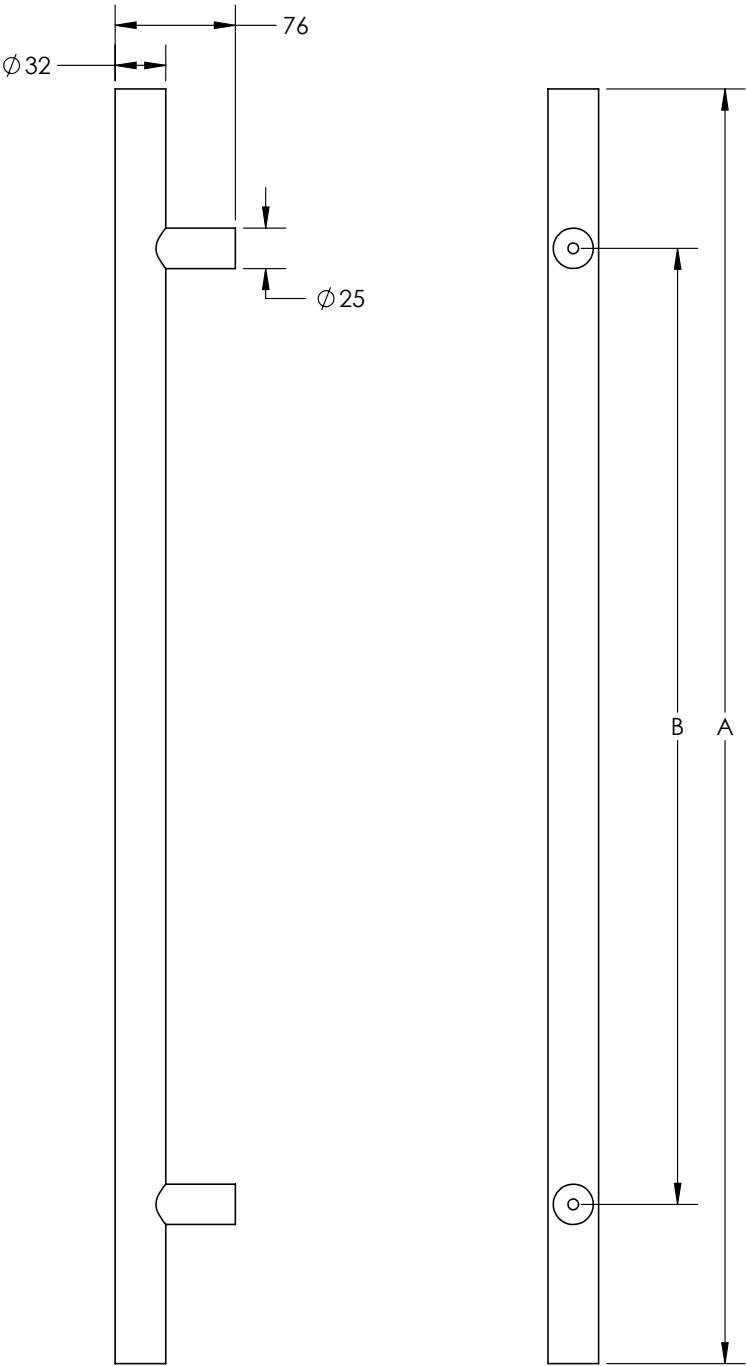


Door Multi-point Locking System

45° Angle Straight Pull Bar




	6-C0145-08-0-XX / K-C0345-08-0-XX	6-C0145-12-0-XX / K-C0345-12-0-XX	6-C0145-18-0-XX / K-C0345-18-0-XX
Length (A)	800mm	1200mm	1800mm
Fixing centers (B)	600mm	1000mm	1400mm

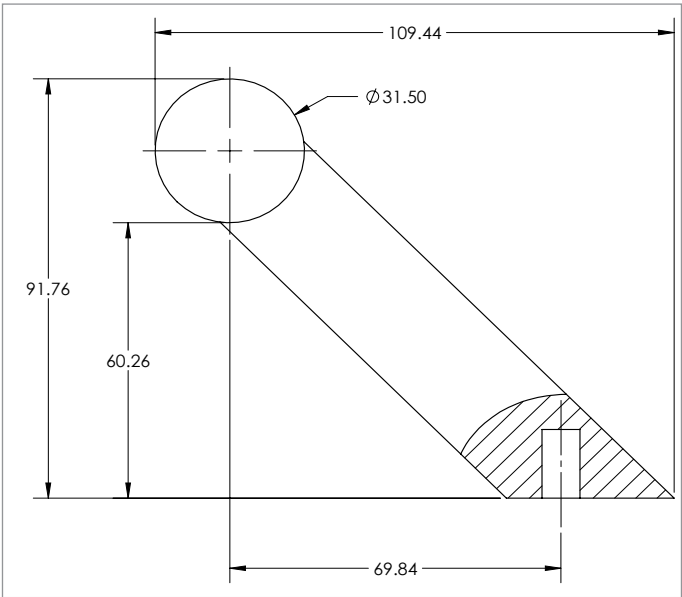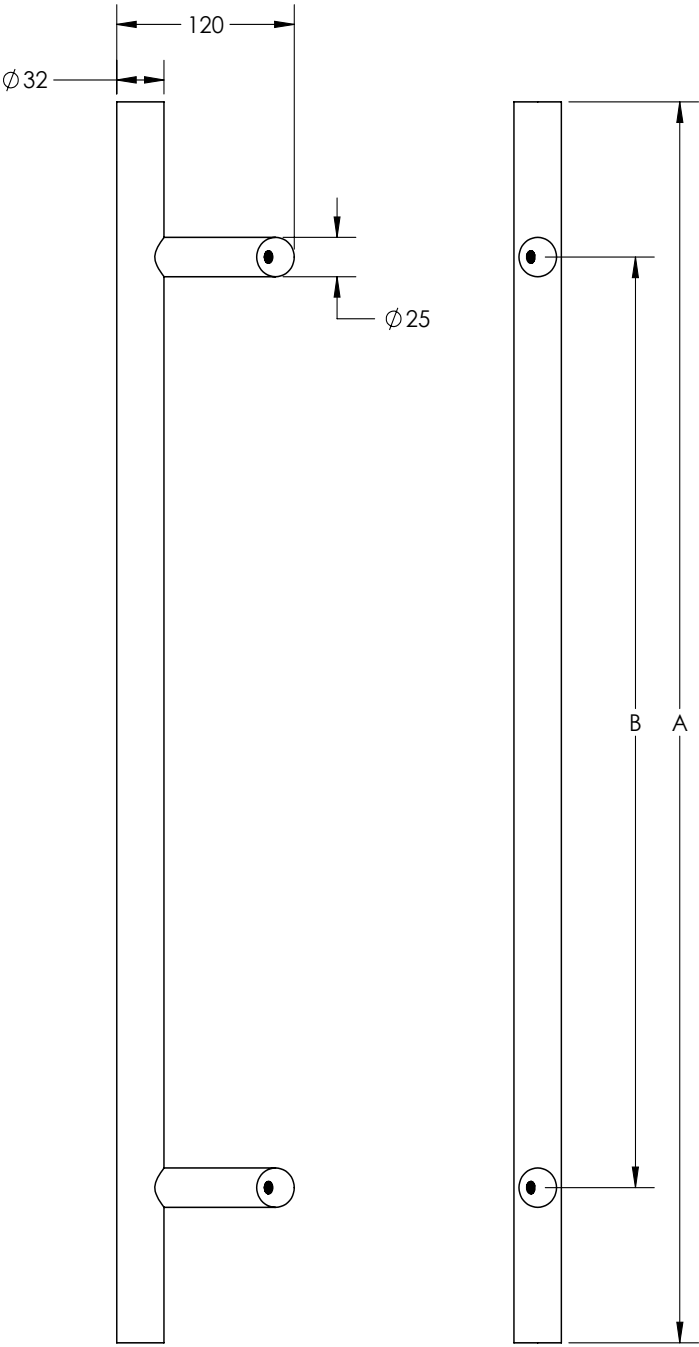

Door Multi-point Locking System

Rectangular Pull Bar

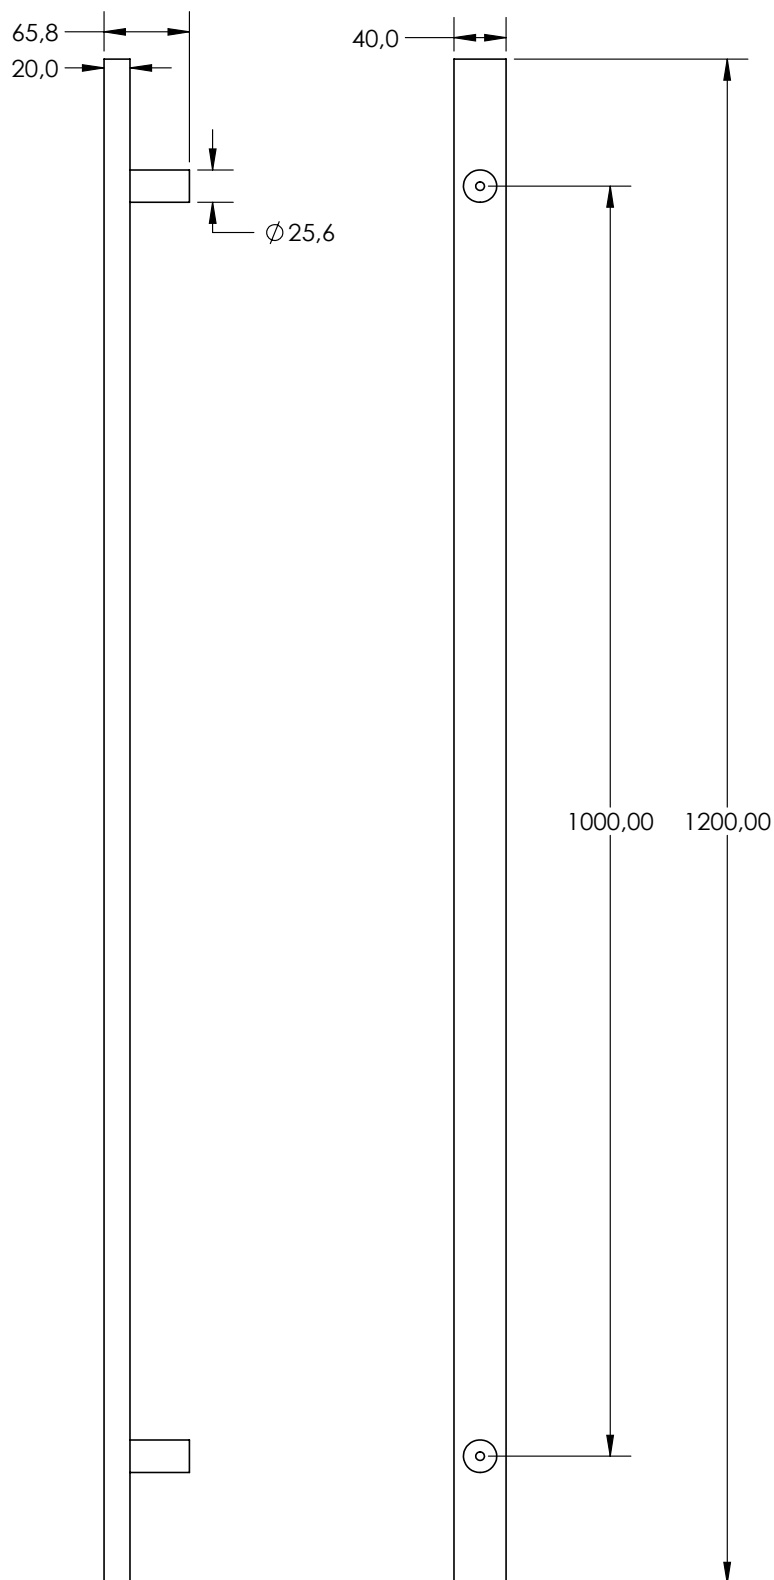


Door Multi-point Locking System

Pull Handle Cutout




Part Number	Length (A) mm	Fixing centers (B) mm	Ø Holes (C) mm	Ø Holes (C) in
K-C0340-08-P-* / 6-C0140-08-0-*	800	600	11	7/16
K-C0340-12-P-* / 6-C0140-12-0-*	1200	1000	11	7/16
K-C0340-18-P-* / 6-C0140-18-0-*	1800	1400	11	7/16
K-C0345-08-P-* / 6-C0145-08-0-*	800	600	11	7/16
K-C0345-12-P-* / 6-C0145-12-0-*	1200	1000	11	7/16
K-C0345-18-P-* / 6-C0145-18-0-*	1800	1400	11	7/16
K-C0350-12-P-* / 6-C0150-12-0-*	1200	1000	11	7/16

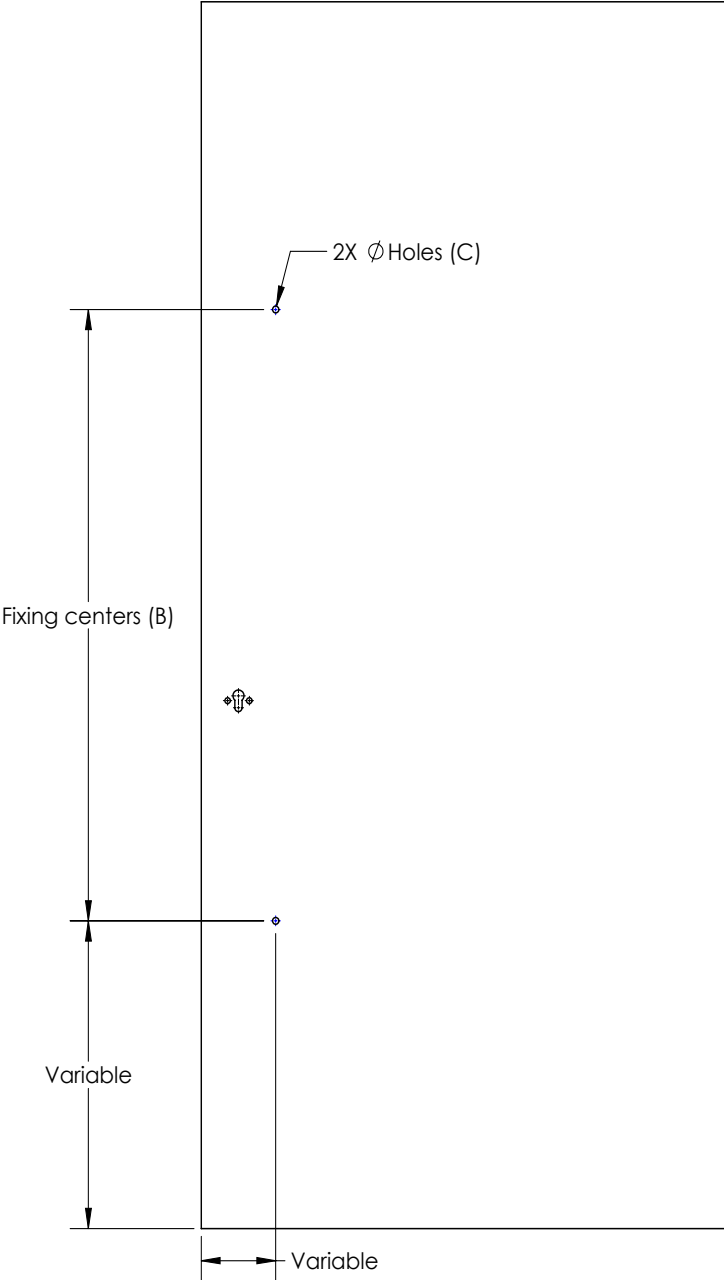




Construction Key

Description	Part Number
Construction key	9-U0001-01-0-0

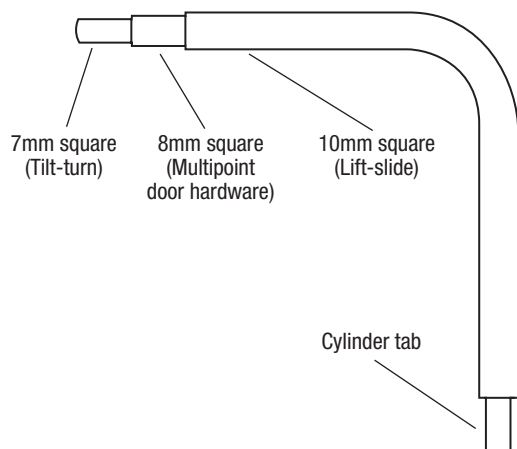


Plastic Cup - With Edge

Description	Part Number
Plastic cup	9-C4765-00-0-6

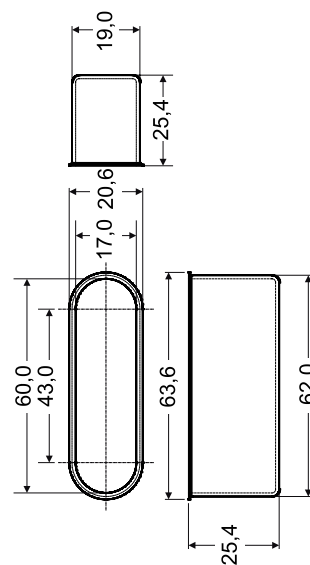


Fixing for Dummy Handles

Description	Part Number
Fixing plate	6-C0800-03-0-0

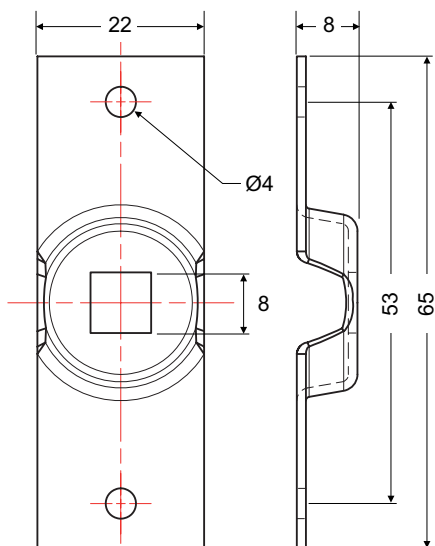

Plastic Cup - No Edge

Description	Part Number
Plastic cup	9-C4765-0A-0-6

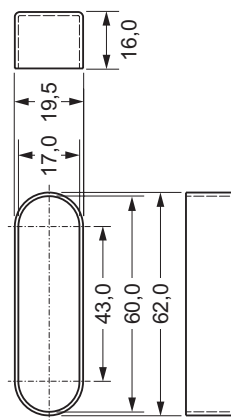


Door Multi-point Locking System

SALTO Profile cylinders for smart lock




6-U7350-M1-0-01

For 1-3/4" doors

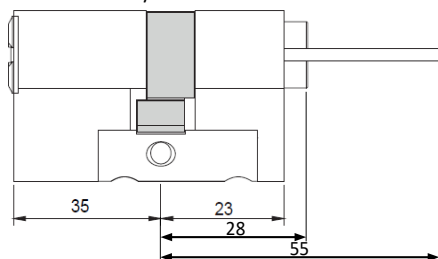


6-U7350-M2-0-01

For 2-1/4" doors

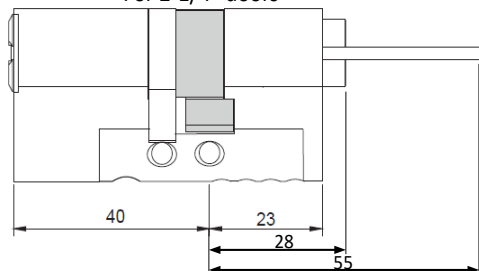

6-U7350-M3-0-01

For 3" doors

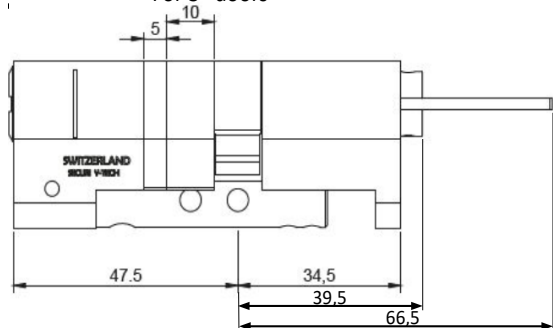

Exterior



Exterior rosette
(7,5/9 mm thick)


Interior



EU spacer*
(6mm thick)



'U' mounting bracket
(1,5mm thick)



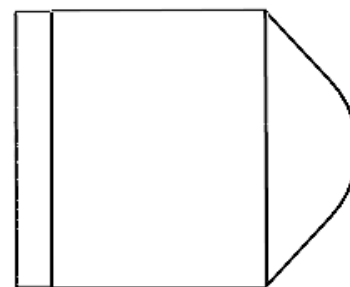


Danalock
(Tail piece depth = min.
5mm, max. 36mm)

03
12

Door Multi-point Locking System

6-C0140-08/12/18-0-XX - Pull Handle Round Installation Instructions

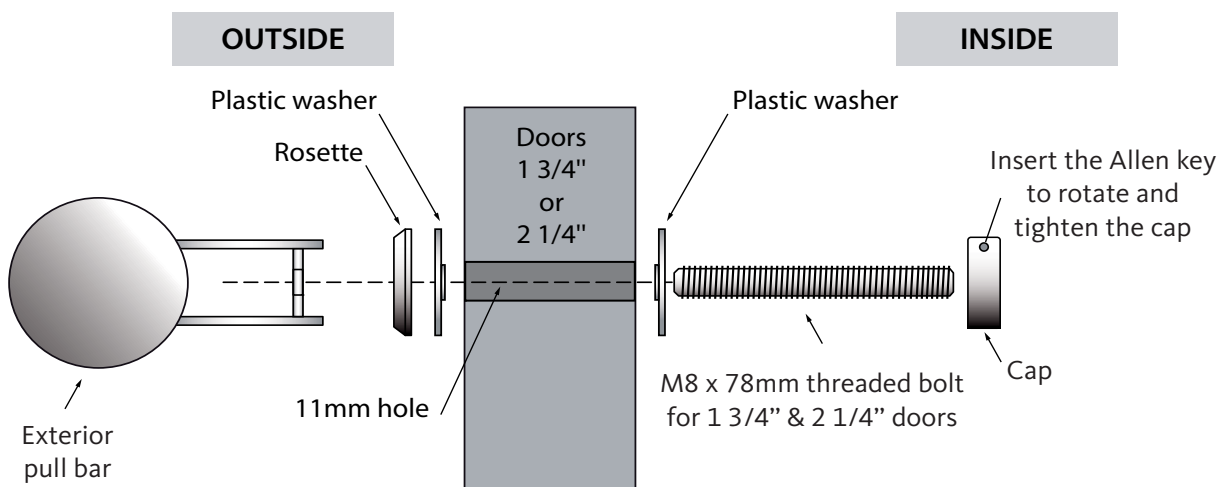
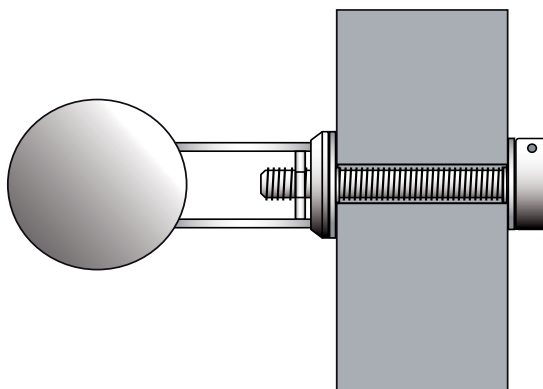
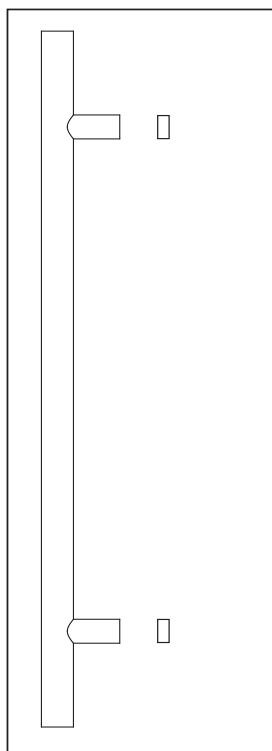


Door Multi-point Locking System

6-C0145-08/12/18-0-XX - Pull Handle Round Angle Installation Instructions





03
12

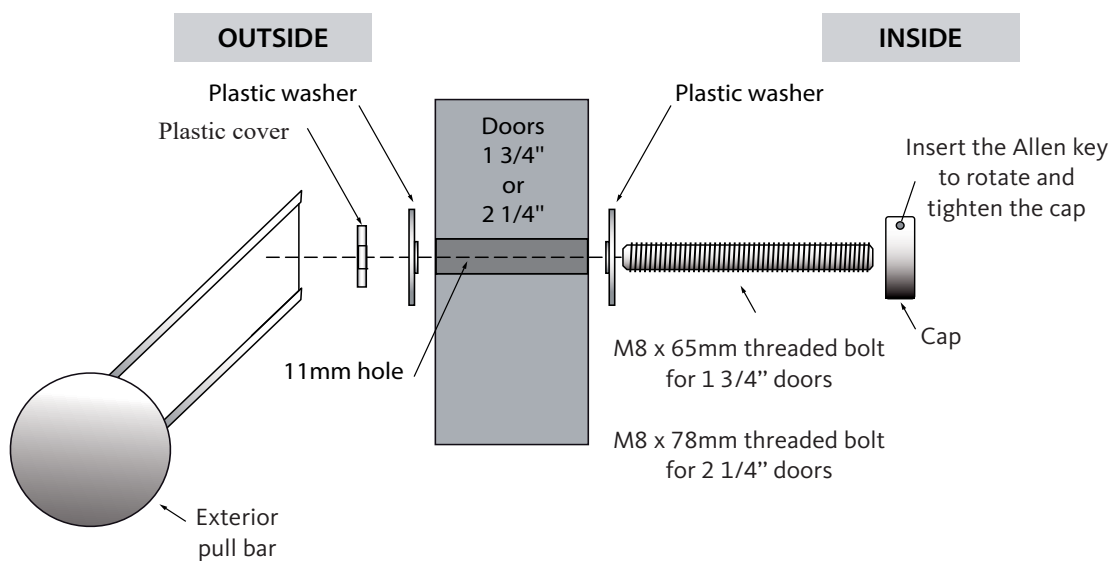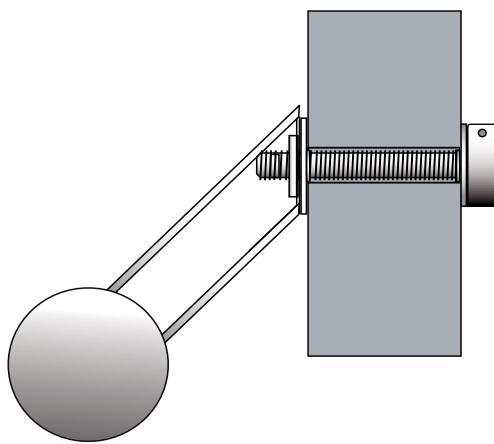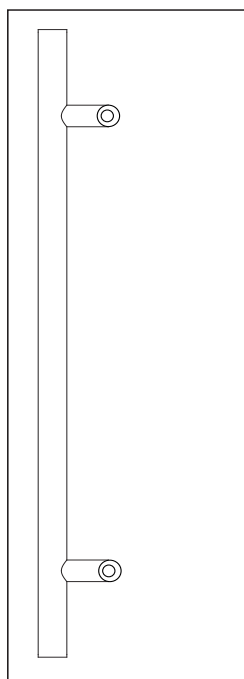



Door Multi-point Locking System

6-C0150-12-0-XX - Pull Handle Rectangular Installation Instructions

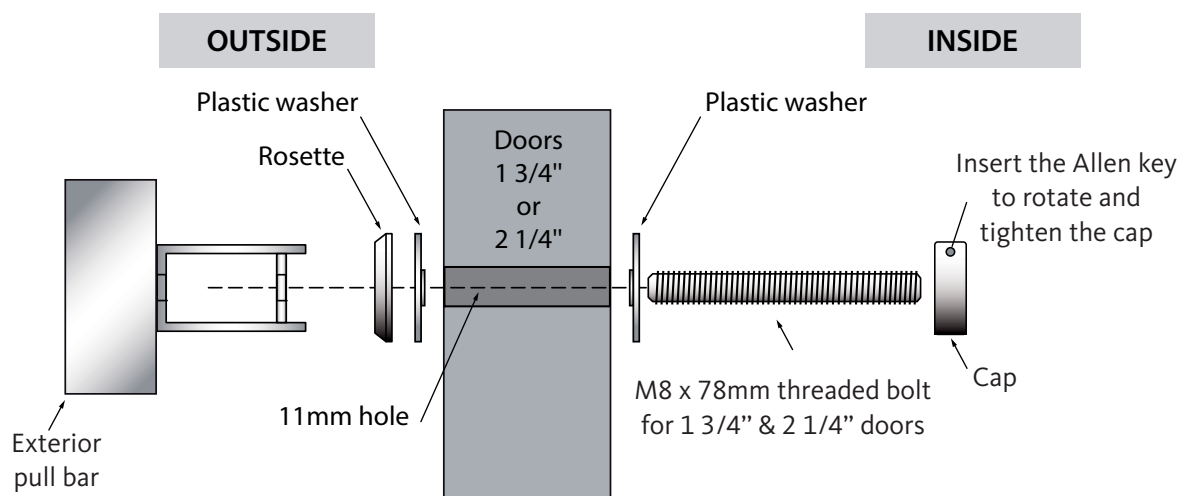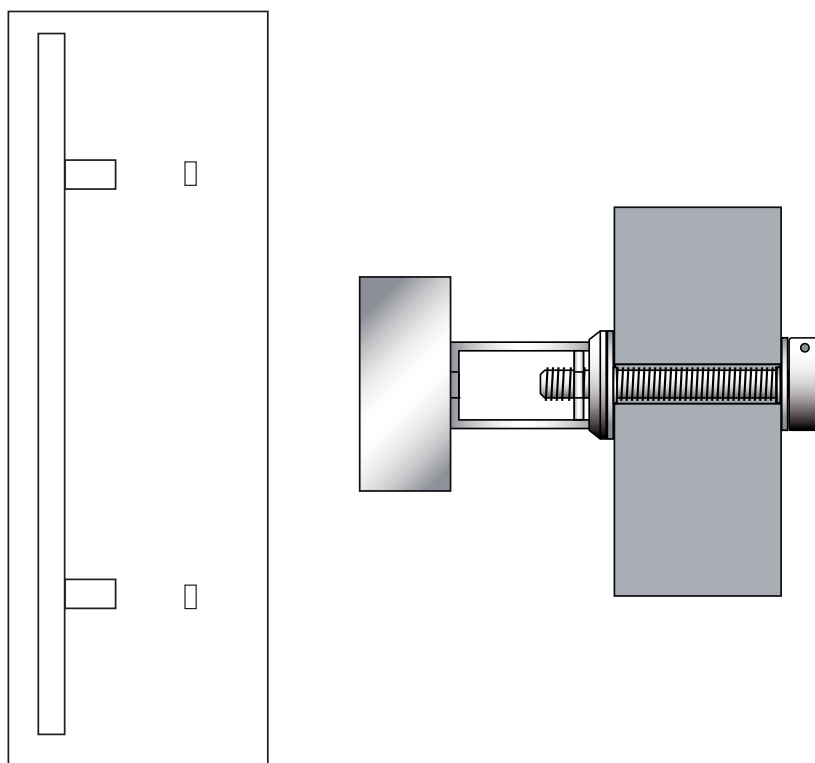


Door Multi-point Locking System

K-C0340-08/12/18-P-XX - Pull Handles Round Installation Instructions


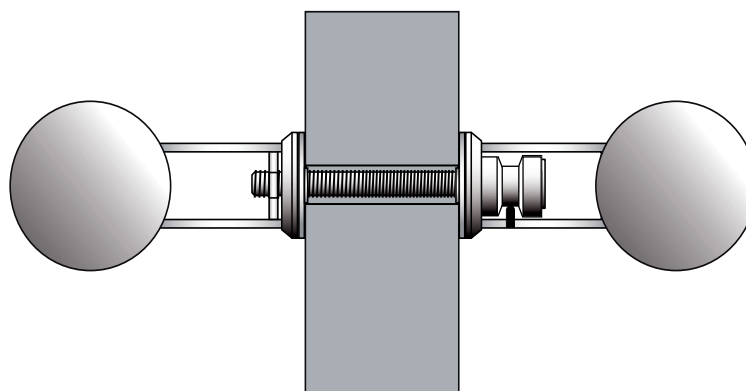
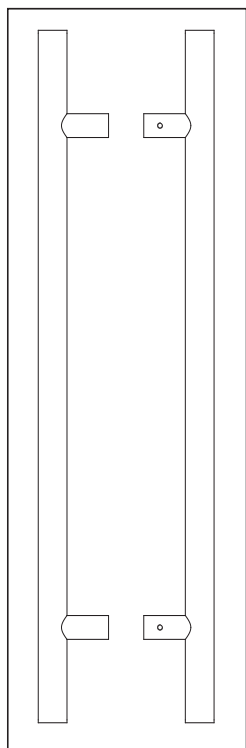


03
12

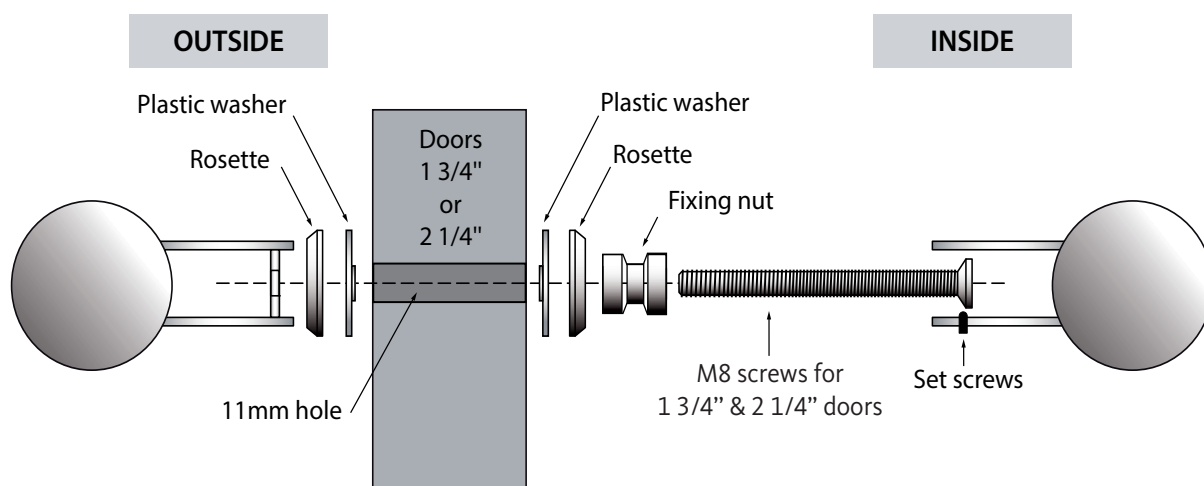



Door Multi-point Locking System

K-C0345-08/12/18-P-XX - Pull Handles Round Angle Installation Instructions

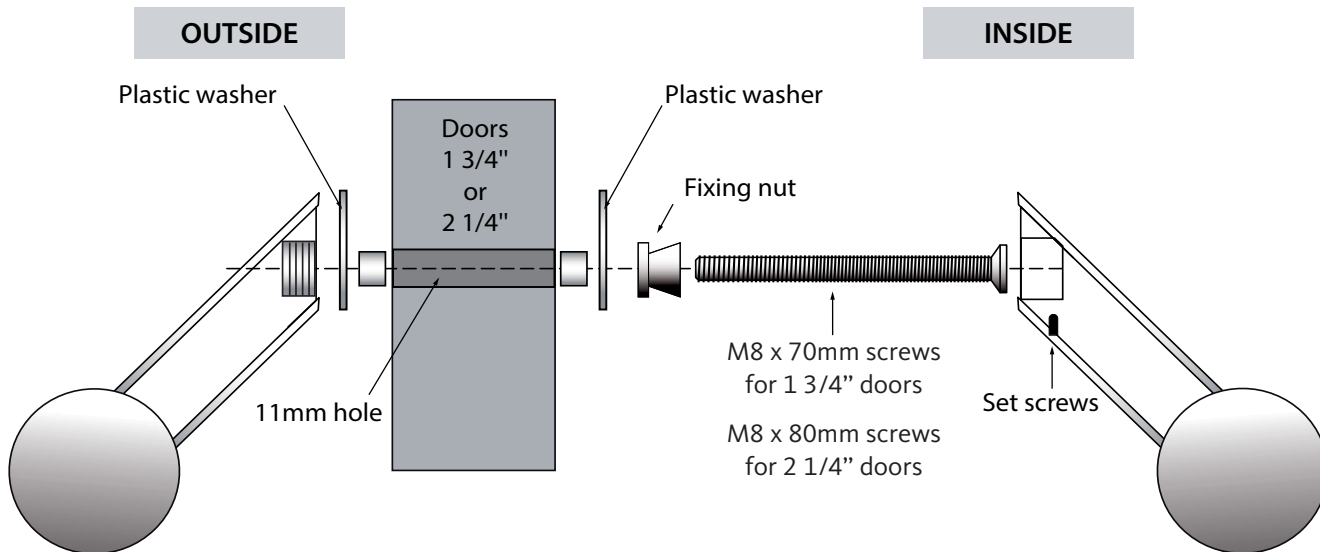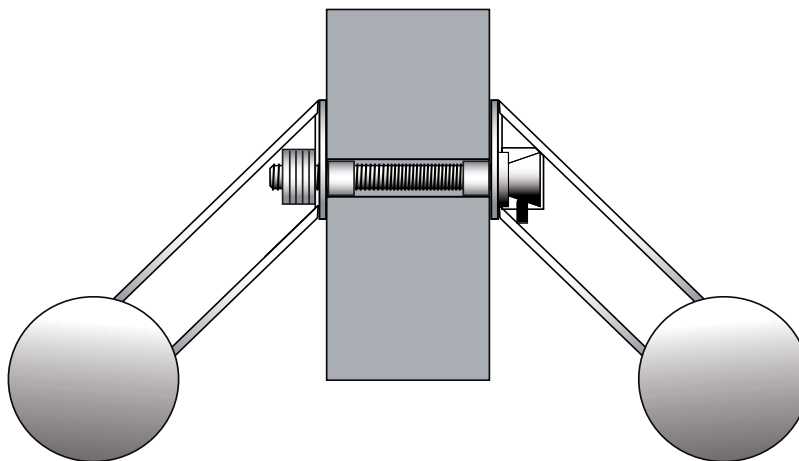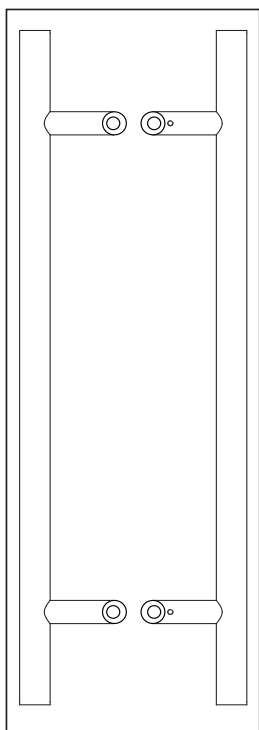


Door Multi-point Locking System

K-C0350-12-P-XX - Pull Handles Rectangular Installation Instructions

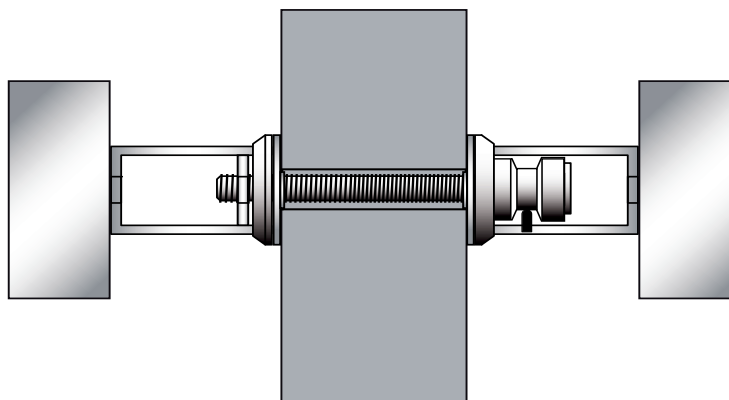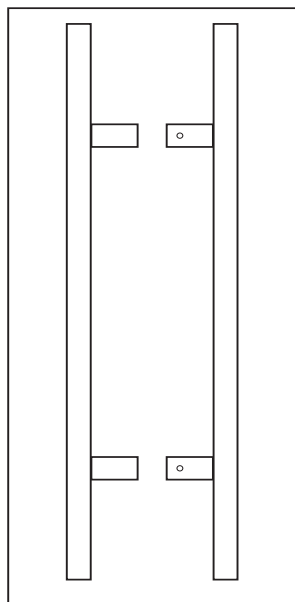

OUTSIDE

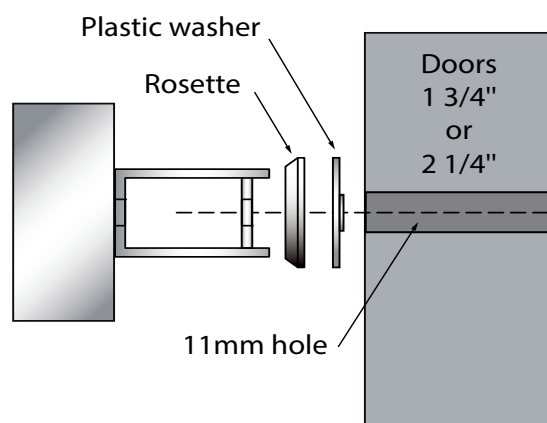

INSIDE

