




03T.12

AUTOMATIC KEY-OPERATED LOCK


SECURY Automatic Cutout.....	03T.12.2
SECURY Automatic Extension Cutout.....	03T.12.3
Reverse Latches & Connect Automatic Extension.....	03T.12.4
EURO Mortise Door Lock.....	03T.12.5
Keepers	03T.12.7
BELCANTO handle & EU Rosettes.....	03T.12.10
VENTO Handle Set.....	03T.12.17
Profile Cylinder & Handle Set Cutout.....	03T.12.18
EURO Profile Cylinders For TEDEE.....	03T.12.21
EURO Profile Cylinders For DANALOCK.....	03T.12.22
SALTO Profile Cylinders For Smart Lock.....	03T.12.23
Round Straight Pull Handle.....	03T.12.24
45° Angle Straight Pull Handle.....	03T.12.25
Square Pull Handle.....	03T.12.26
Pull Handle Cutout.....	03T.12.27
Accessories	03T.12.28
K-6-C0341-06/12/18-P-XX - Pull Handle Round	
Installation Instructions.....	03T.12.29
K-6-C0343-08/12/18-P-XX - Pull Handle Round Angle	
Installation Instructions	03T.12.30
K-6-C0346-06/12/18-P-XX - Pull Handle Rectangular	
Installation Instructions	03T.12.31
K-C0350-12-P-XX - Pull Handles Rectangular	
Installation Instructions	03T.5.32

SECURY Automatic European Profile Cylinder Door Lock for Lever Handle

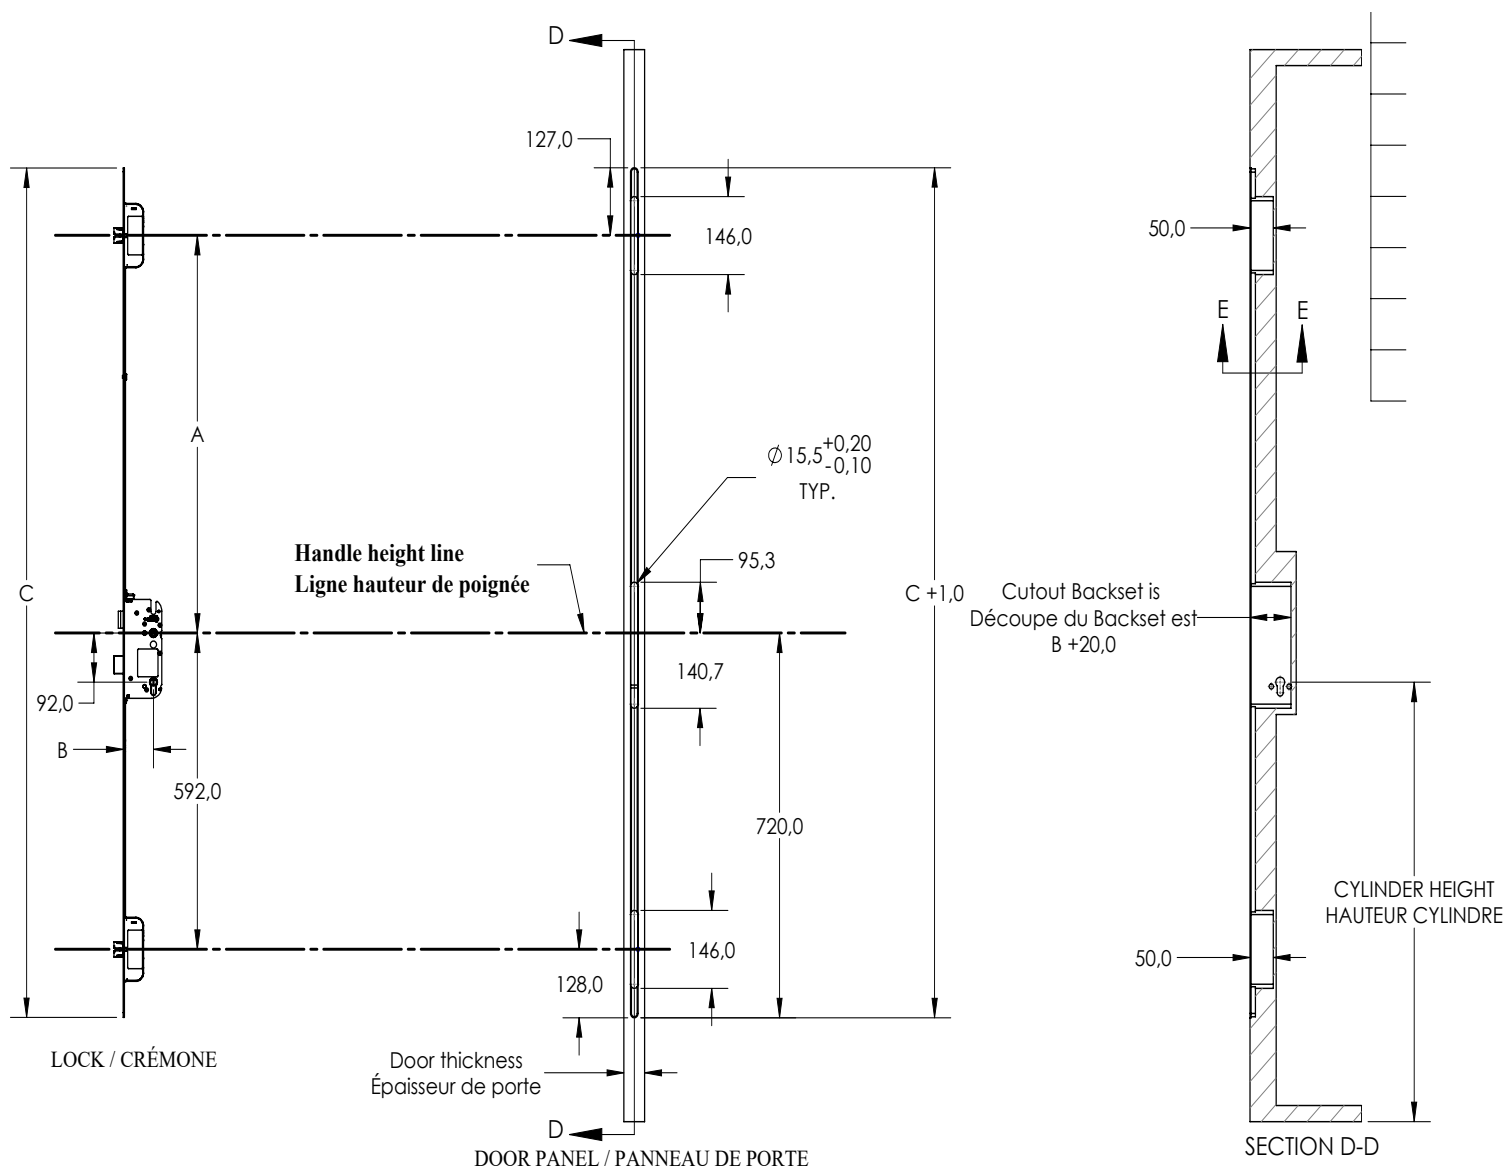

DOOR PANEL / PANNEAU DE PORTE

Reference number	B	A	C
6-40526-01-R-8B	35 mm	744 mm	1590 mm
6-40526-02-R-8B	35 mm	1054 mm	1900 mm
6-40526-03-R-8B	45 mm	744 mm	1590 mm
6-40526-04-R-8B	45 mm	1054 mm	1900 mm
6-40526-05-R-8B	55 mm	744 mm	1590 mm
6-40526-06-R-8B	55 mm	1054 mm	1900 mm
6-40526-07-R-8B	65 mm	744 mm	1590 mm
6-40526-08-R-8B	65 mm	1054 mm	1900 mm

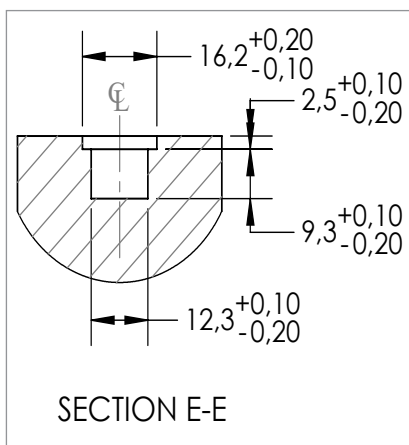


NOTE:

When using lever handle operation,
please check handle height first
All dimensions must be verified on a
prototype before production
Observe the proper slab to jamb
clearance of 3-4mm

Veuillez d'abord vérifier la hauteur de la poignée avant d'utiliser la poignée à levier.
Toutes les dimensions doivent être vérifiées sur un prototype avant production
Respectez 3 à 4 mm de dégagement entre la porte et le montant de porte

Door Multi-point Locking System

Extensions for SECURY Automatic European Profile Cylinder Door Lock

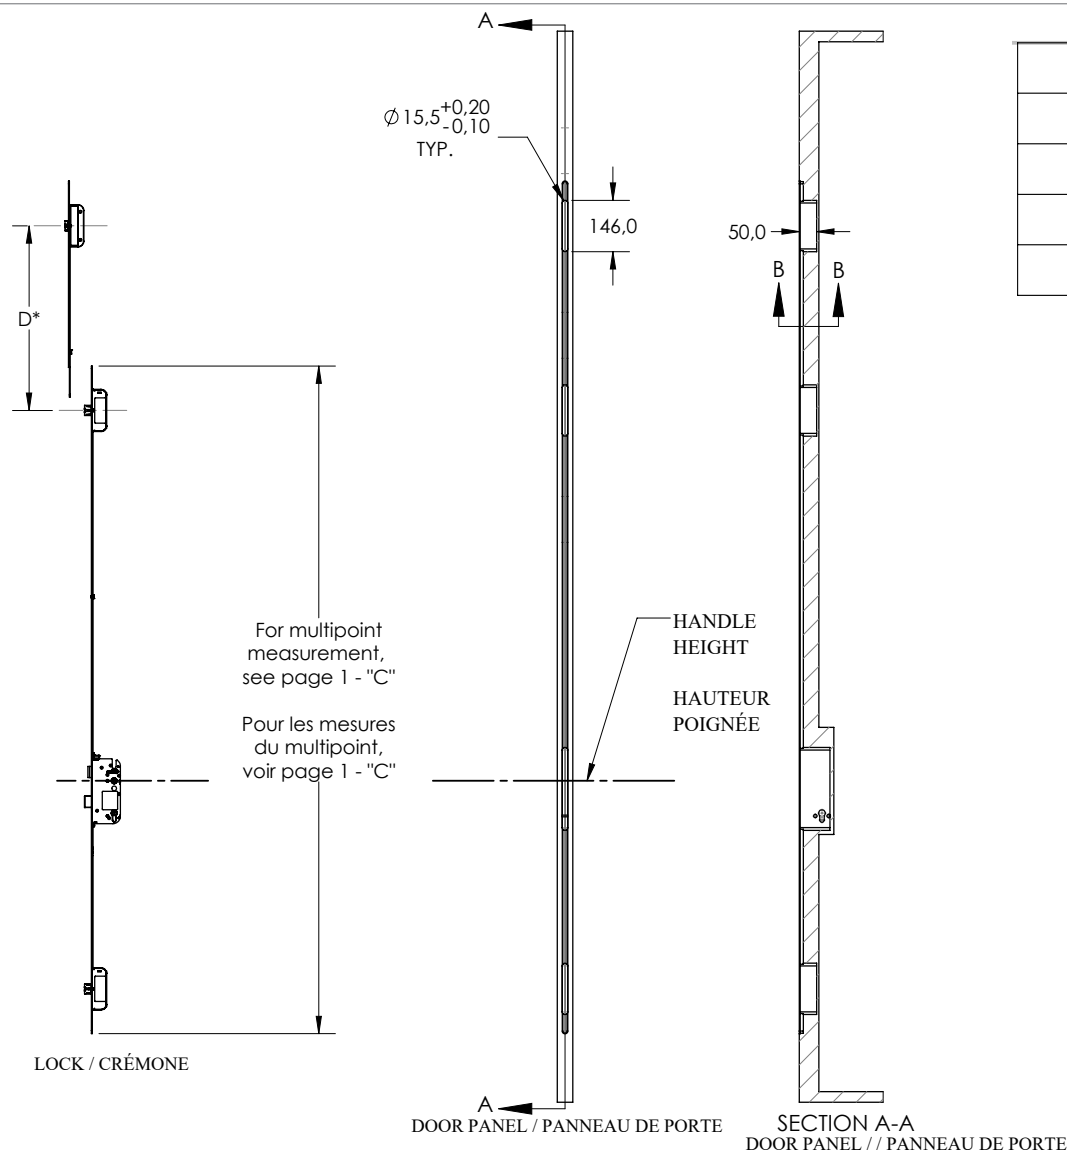


Reference number	D
6-33479-04-0-8B	525 mm
6-C5078-00-0-8B	800 mm
6-C5062-10-0-8B	1050 mm
6-C5062-13-0-8B	1325 mm

NOTES:

All dimensions must be verified on a prototype before production
Observe the proper slab to jamb clearance of 3-4mm
*Optional up to 2 extensions

Toutes les diemnsions doivent être vérifiées sur un prototype avant production
Respectez 3 à 4 mm de dégagement entre la porte et le montant de porte
*Optionel jusqu'a 2 extensions

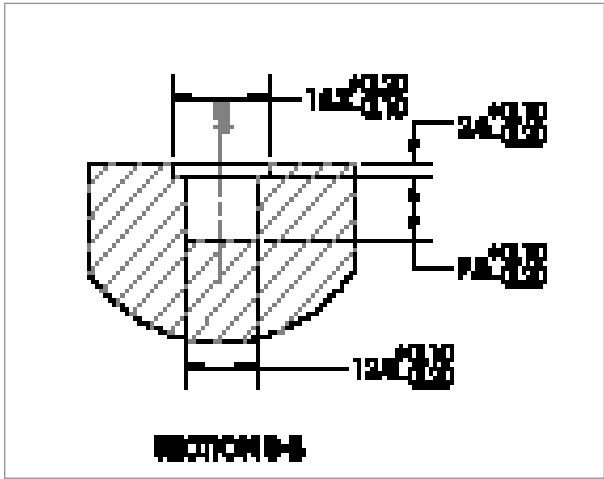


Door Multi-point Locking System


Reverse Latches & Connect Automatic Extension





REVERSE LATCH (Use flathead screwdriver)

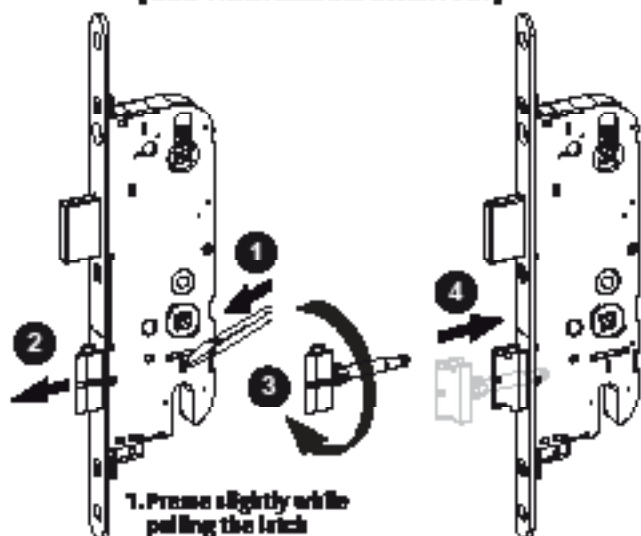

REVERSE AUTOMATIC LATCH (Use 4mm Allen T-key H-00343-04-0-0)

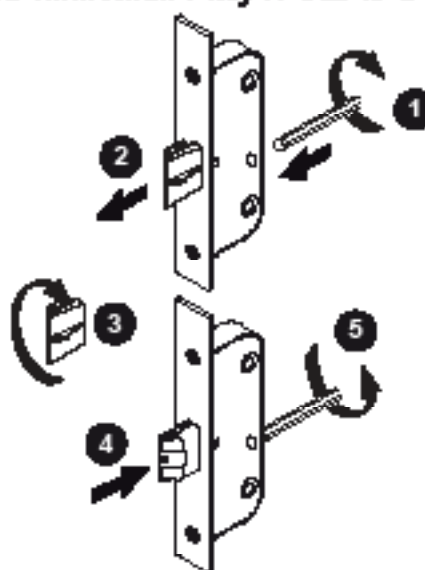


CONNECT AUTOMATIC EXTENSIONS TO DOOR LOCK (Use Torx T5T-key H-00346-15-0-0)

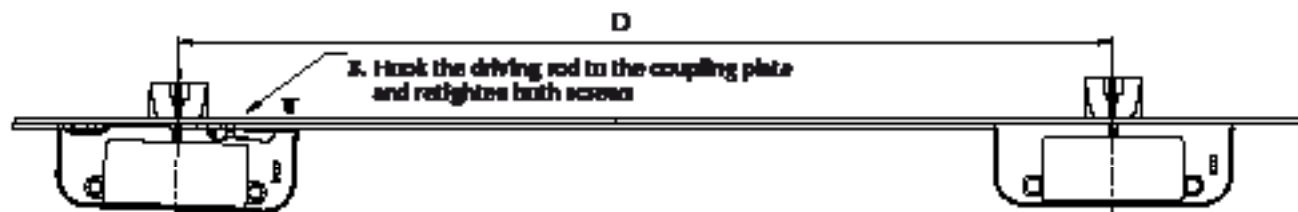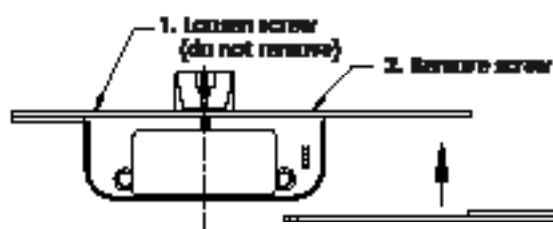

Door Multi-point Locking System


EURO Mortise Door Lock 6-C4881-XX-R-8B

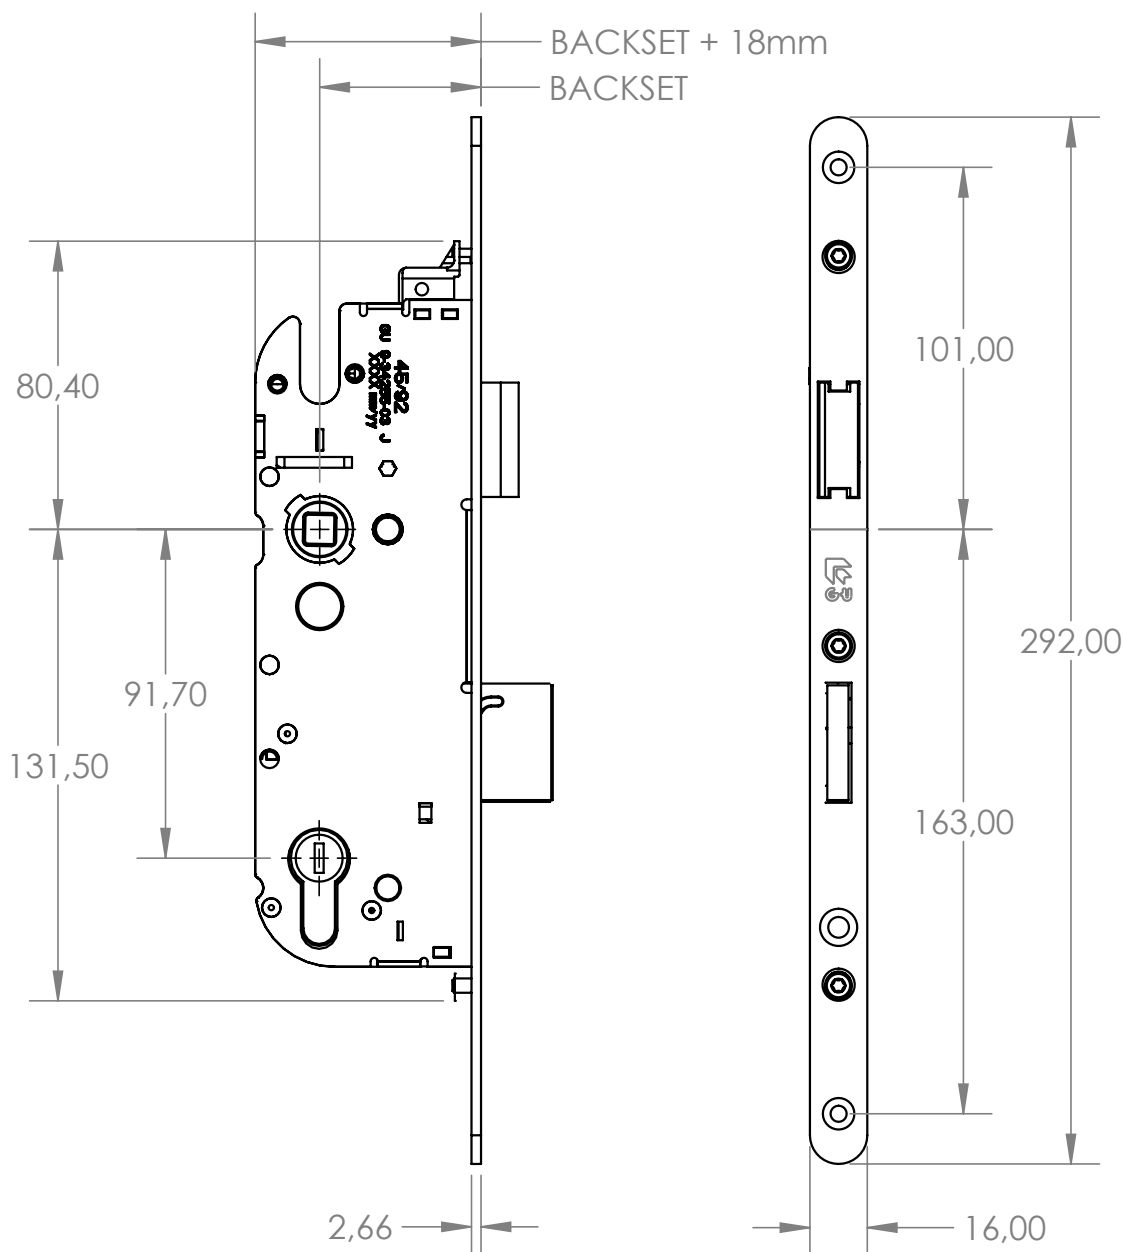

03
12

Door Multi-point Locking System


EURO Mortise Door Lock Cut-Out 6-C4881-XX-R-8B

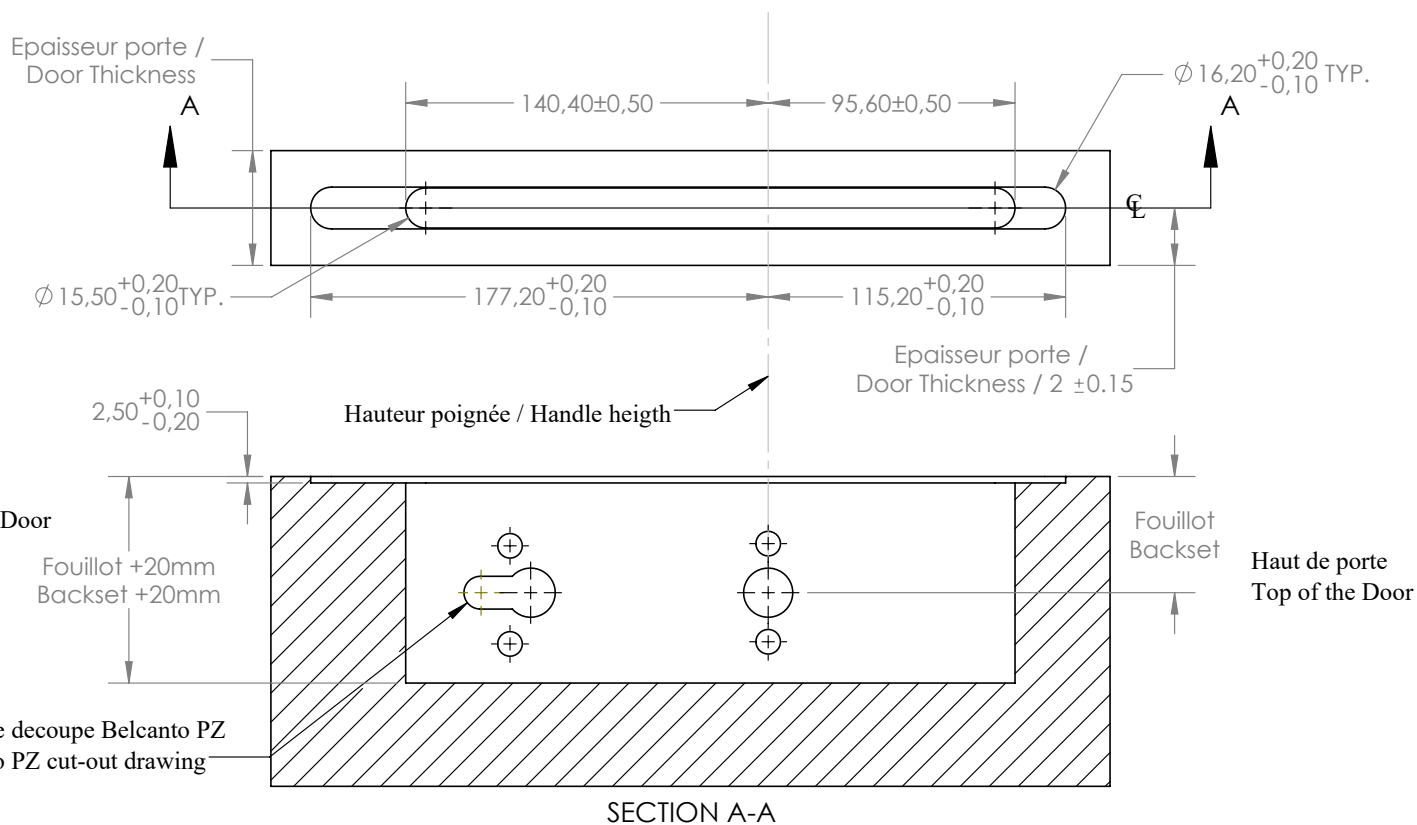




Top & Bottom Keeper

Description	Part Number
Keeper for 45mm (1 3/4") thick doors	9-C4776-45-0-*
Keeper for 57mm (2 1/4") thick doors	9-C4776-57-0-*

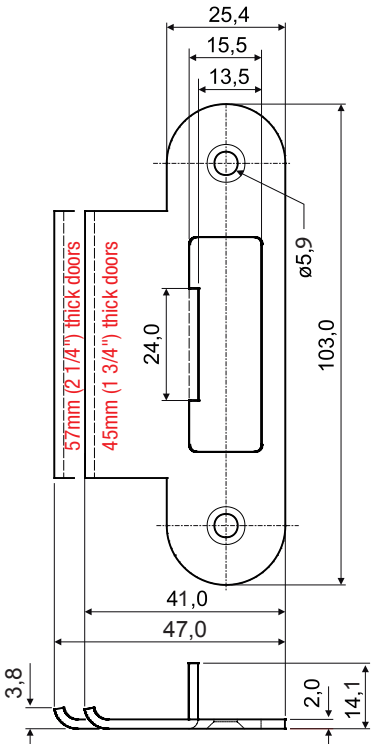

Middle Keeper


Description	Part Number
Keeper for 45mm (1 3/4") thick doors	9-C4777-45-0-*
Keeper for 57mm (2 1/4") thick doors	9-C4777-57-0-*

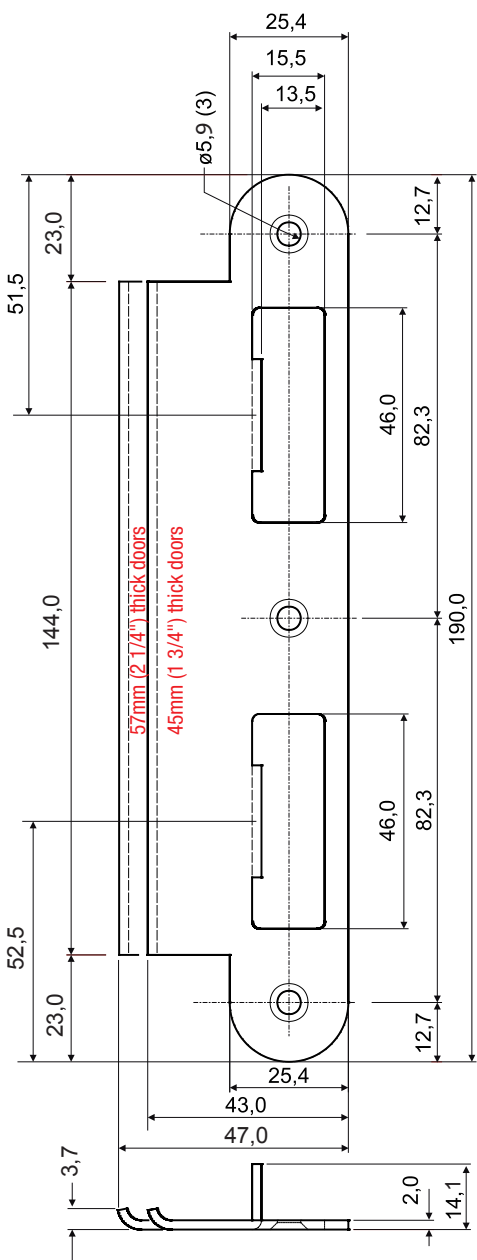




Top & Bottom Keeper

Description	Part Number
Keeper for 76mm (3") thick doors	9-C4716-59-0-8B

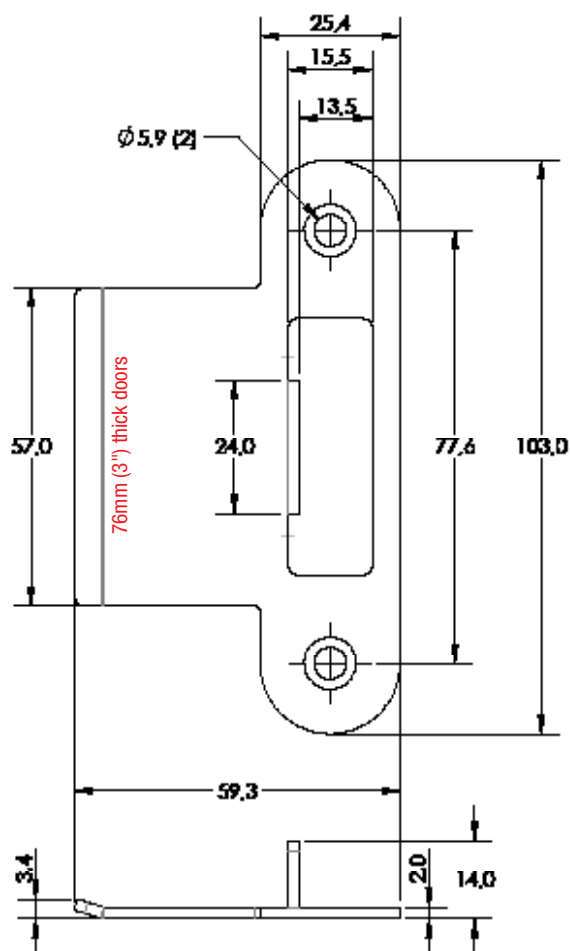


Middle Keeper

Description	Part Number
Keeper for 76mm (3") thick doors	9-C4717-59-0-8B

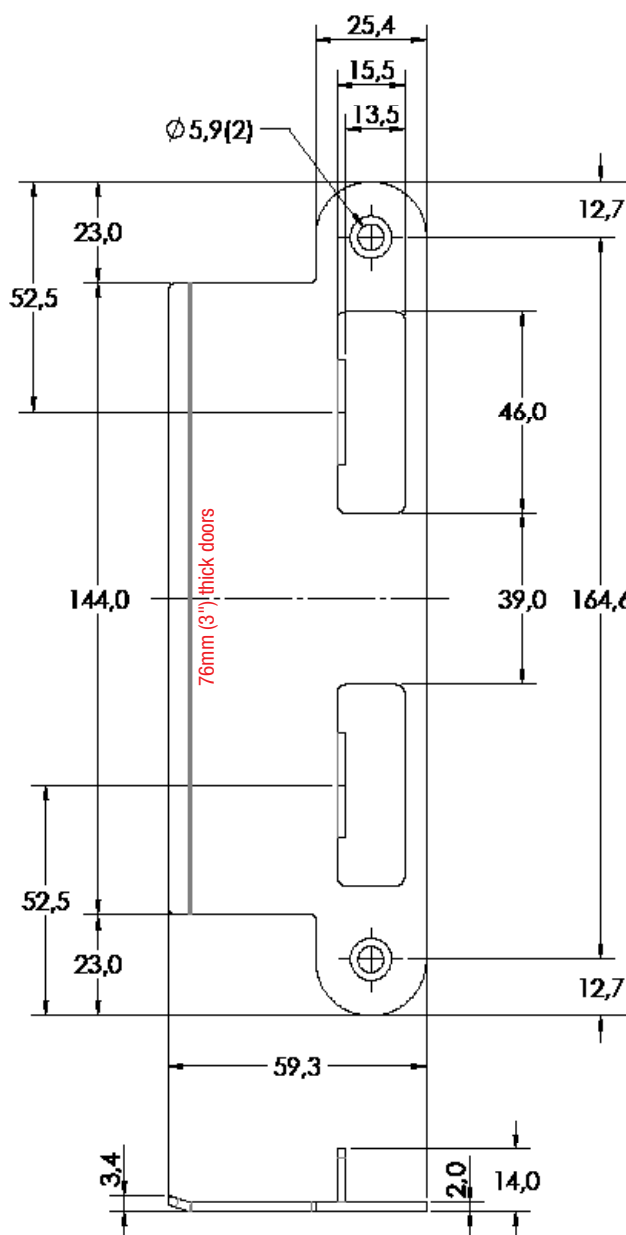


Door Multi-point Locking System


Keepers

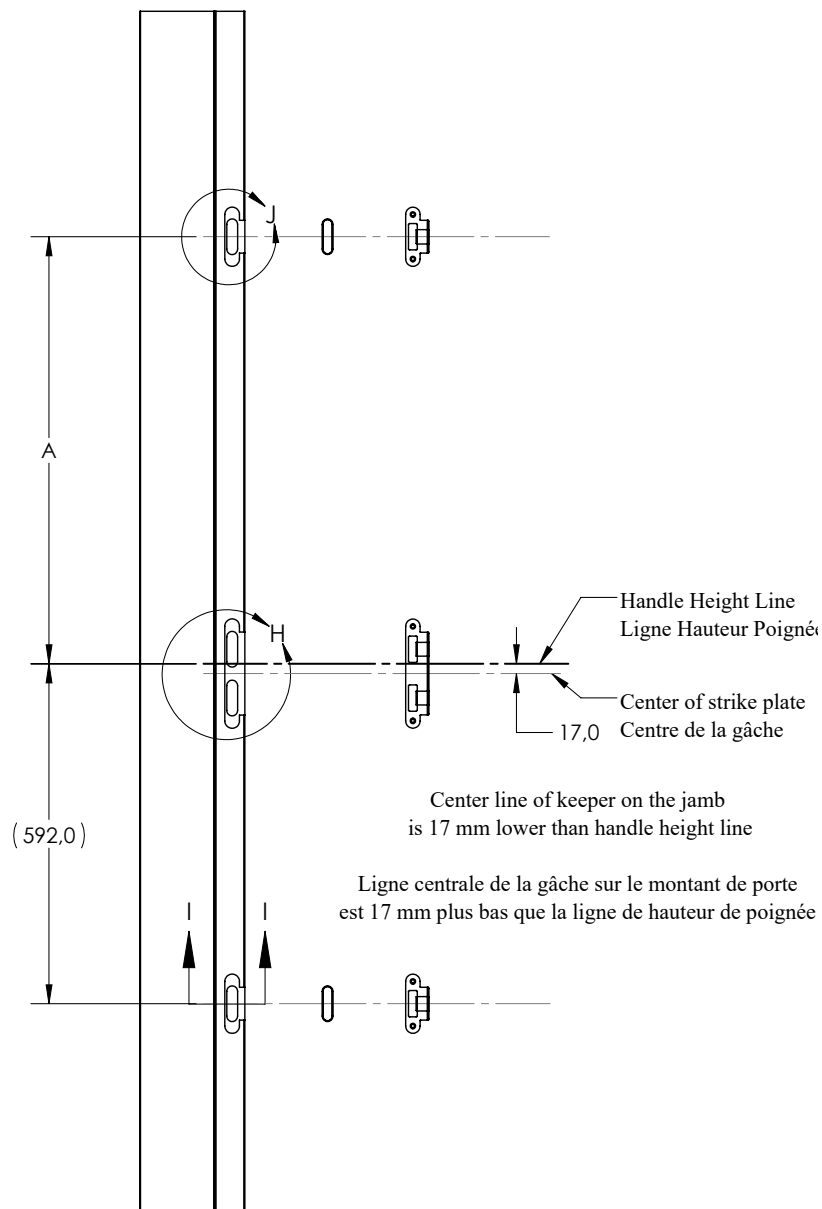


Door Thickness	B
1 1/2"	22,5 mm
1 3/4"	28,5 mm
2"	34,5 mm

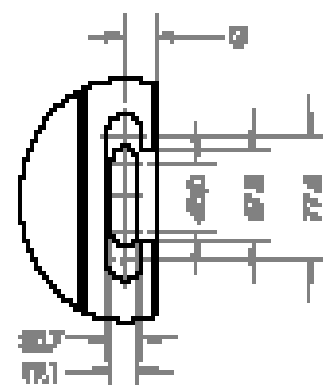

DETAIL J

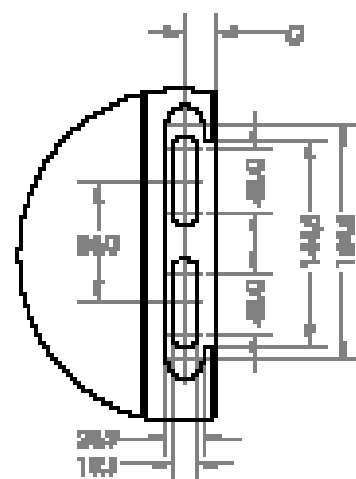

DETAIL K

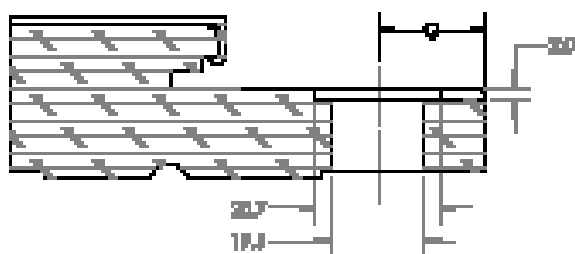

SECTION H


Notes

Center line of door lock will position itself with the center line of the strike plate assembly - 0
Aligner positionnel s'auto-aligne, otherwise it will align the locking
L'aligner s'aligne automatiquement, sinon il s'aligne sur la serrure

The line outside door assembly prepositioned over the line outside of the strike - 0
L'aligner positionnel s'auto-aligne, otherwise it will align the locking
L'aligner s'aligne automatiquement, sinon il s'aligne sur la serrure

Door Multi-point Locking System

BELCANTO Handles & EU Rosettes


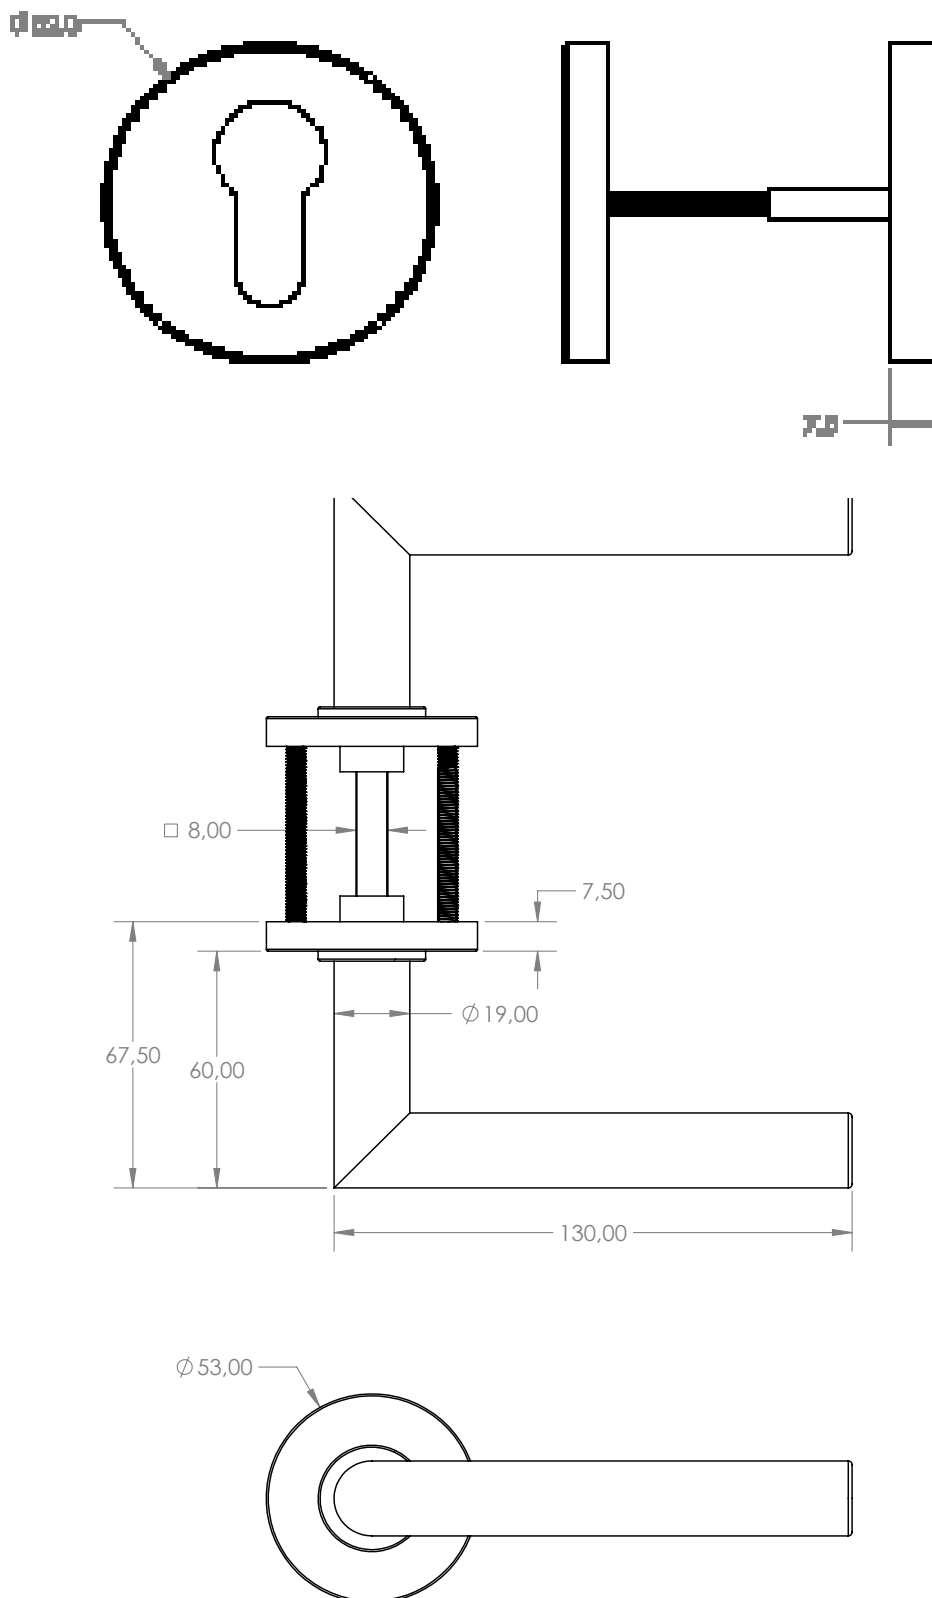


Door Multi-point Locking System



EU Rosettes K-C9075-00-0-*/ K-C9077-00-0-*



Ø 53,00

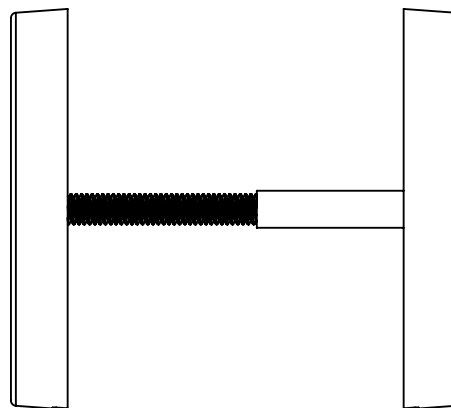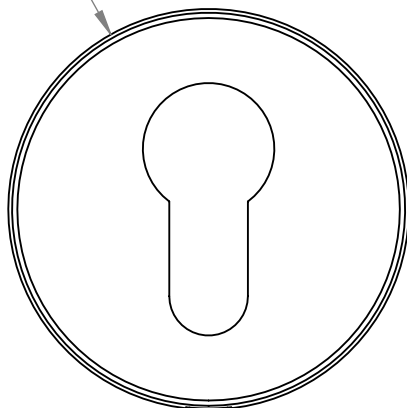

7,5

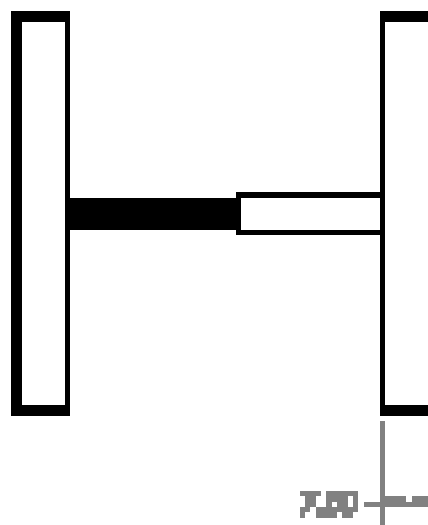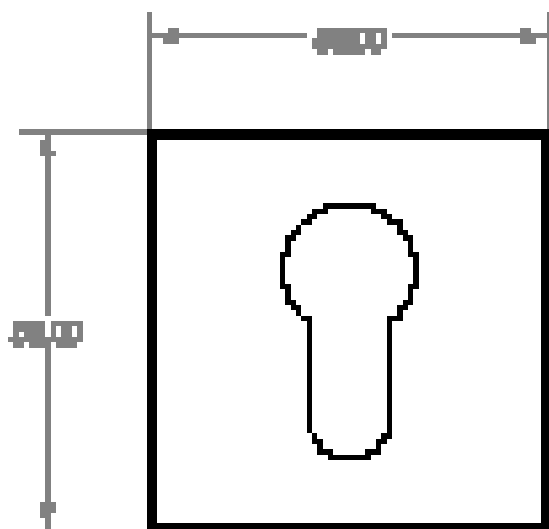


7,5

03
12



Door Multi-point Locking System

BELCANTO Handle set K-C9071-00-0-*

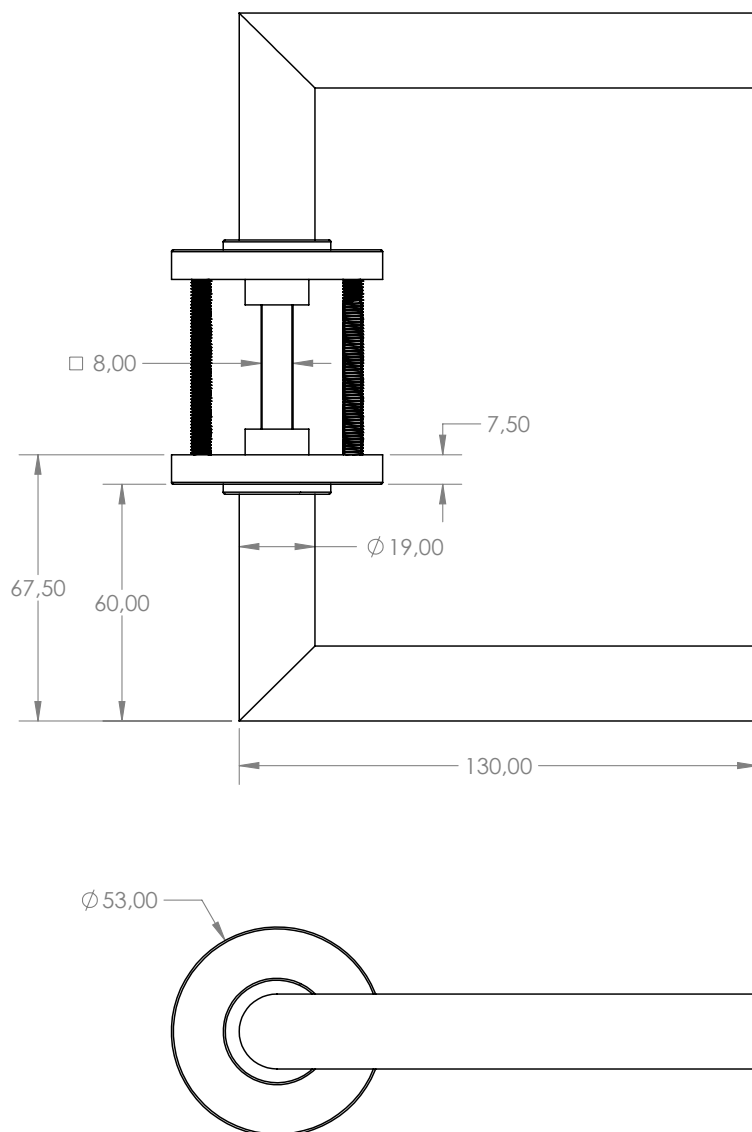

Door Multi-point Locking System



BELCANTO Half Handle set and EU Rosettes K-C9073-00-R/L-*

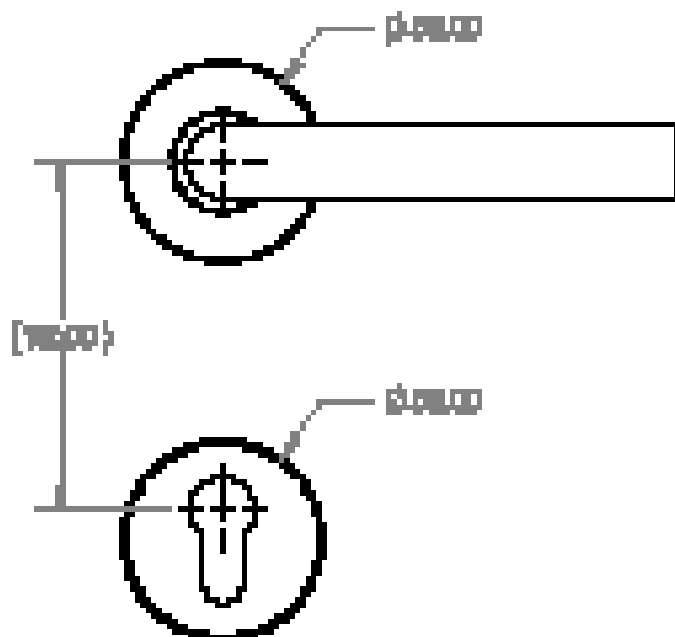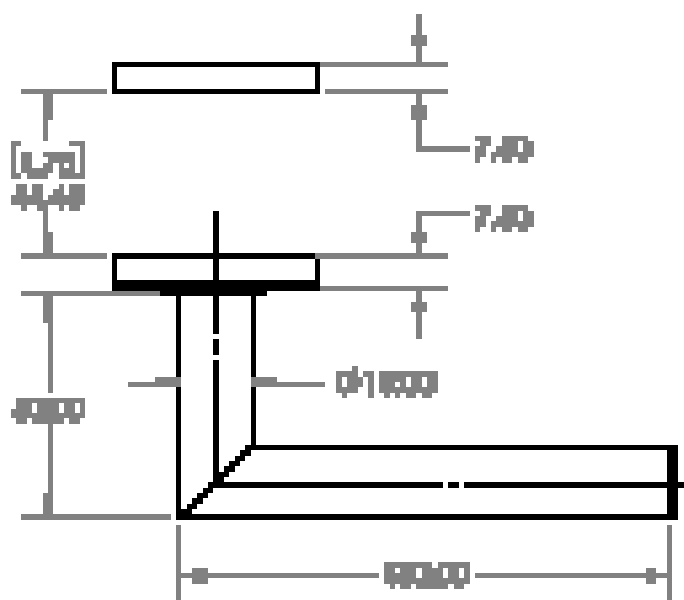

03
12


Door Multi-point Locking System

BKS BELCANTO Handle set and EU Rosettes K-C9070-00-0-*

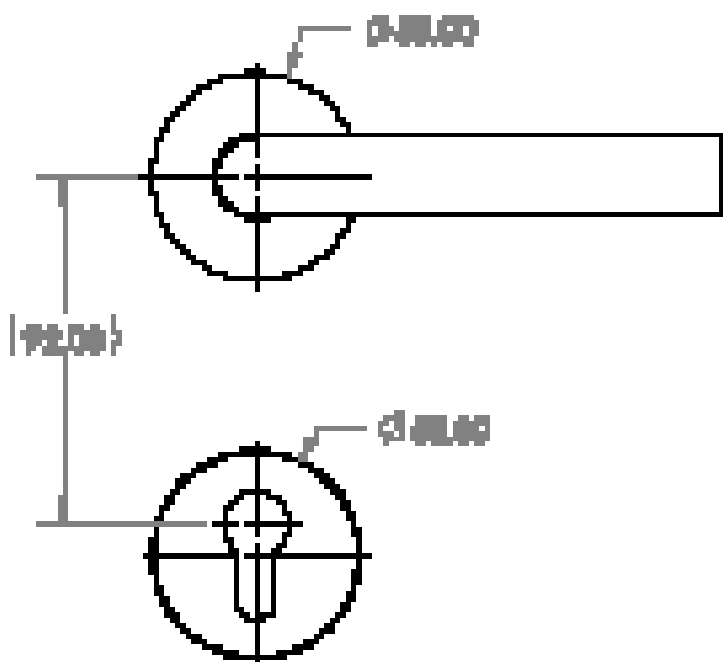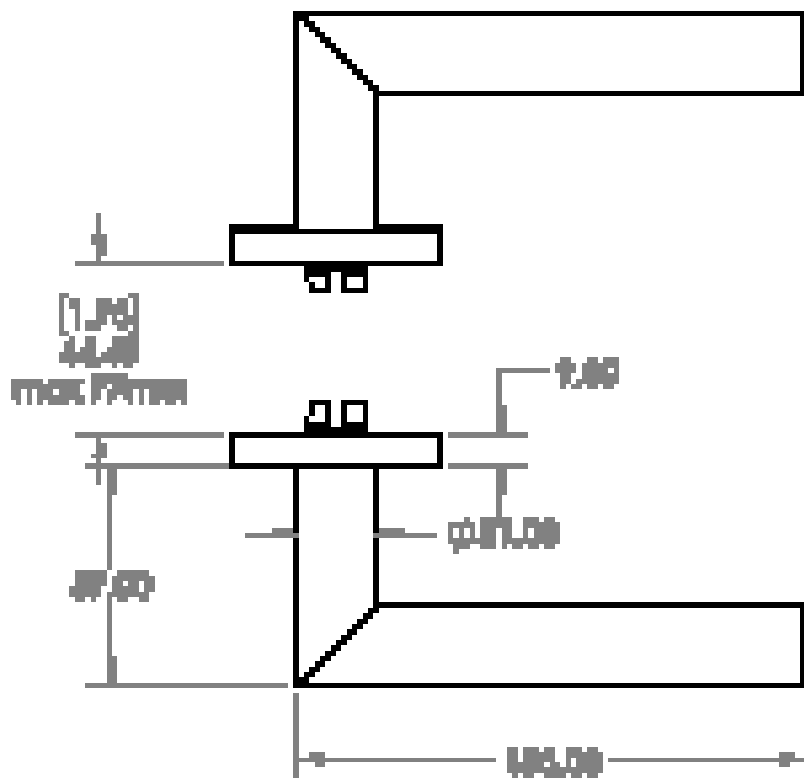



Door Multi-point Locking System

Vertical BKS BELCANTO Handle set and EU Rosettes K-C9070-0M-0-*

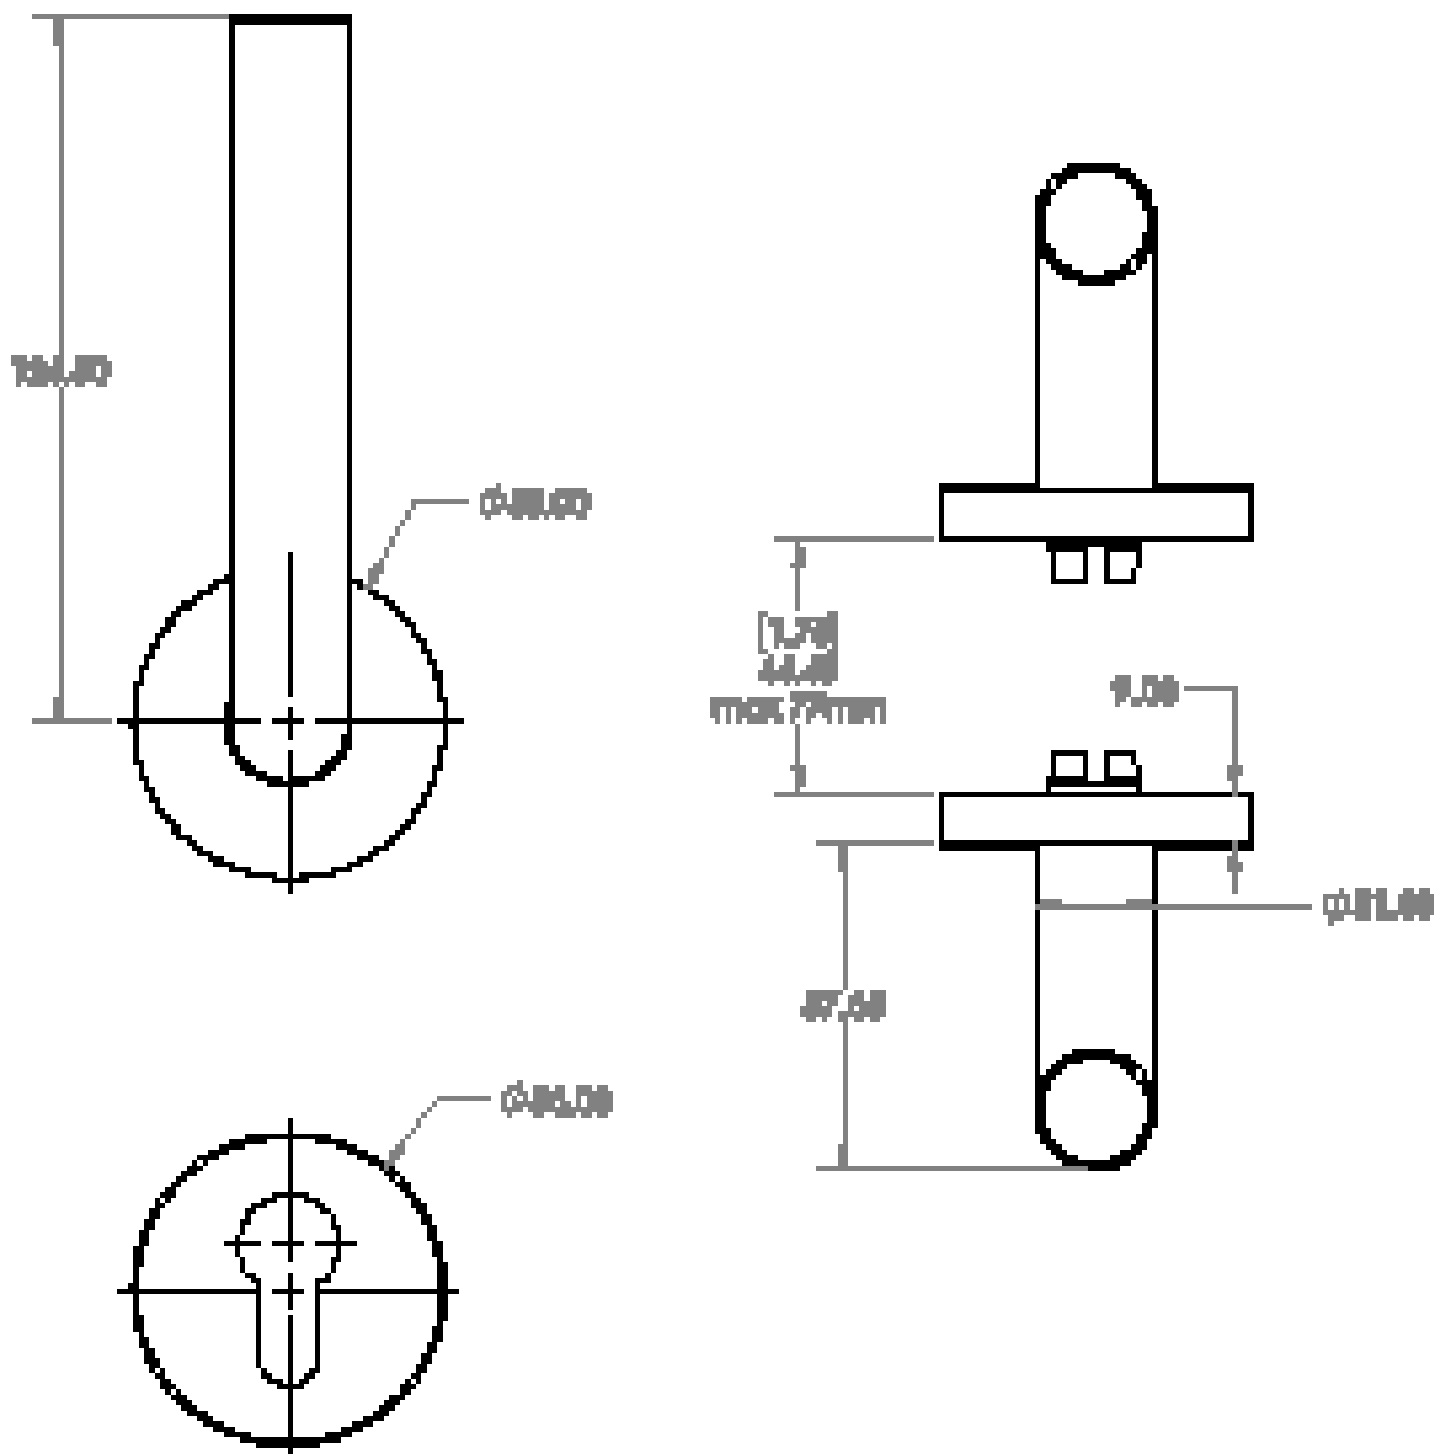


Door Multi-point Locking System

BKS BELCANTO Half Handle set and EU Rosettes K-C9072-00-0-*

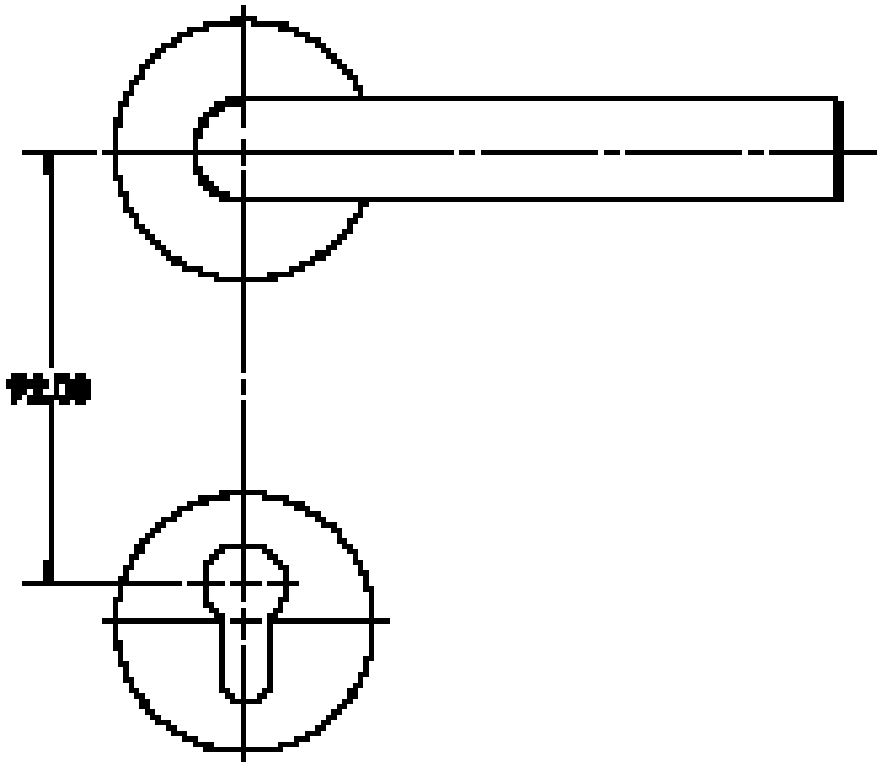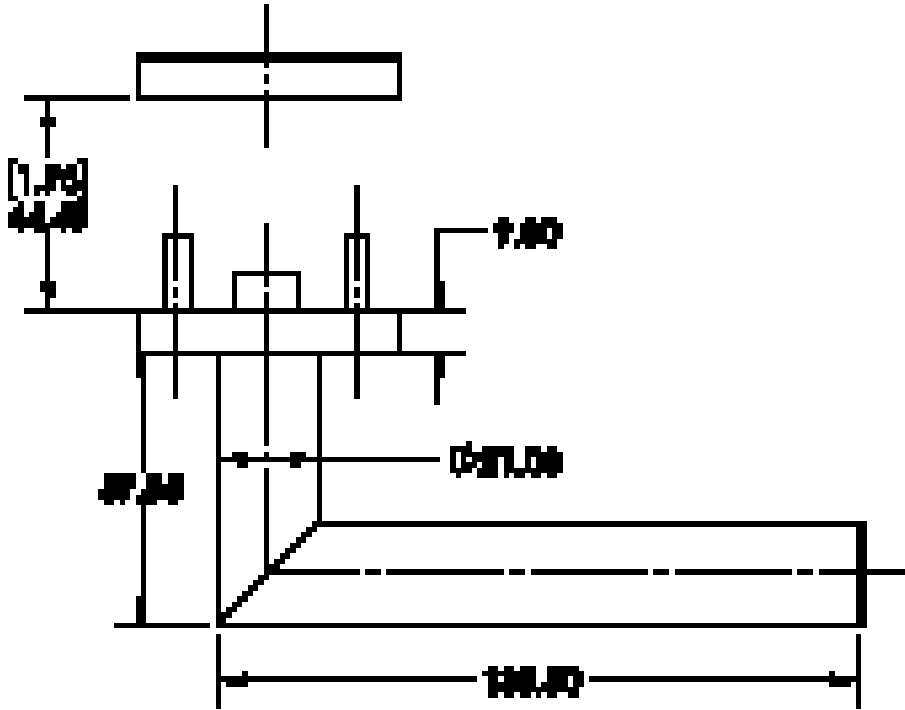


Door Multi-point Locking System

VENTO Handle set K-C0360-00-0-*


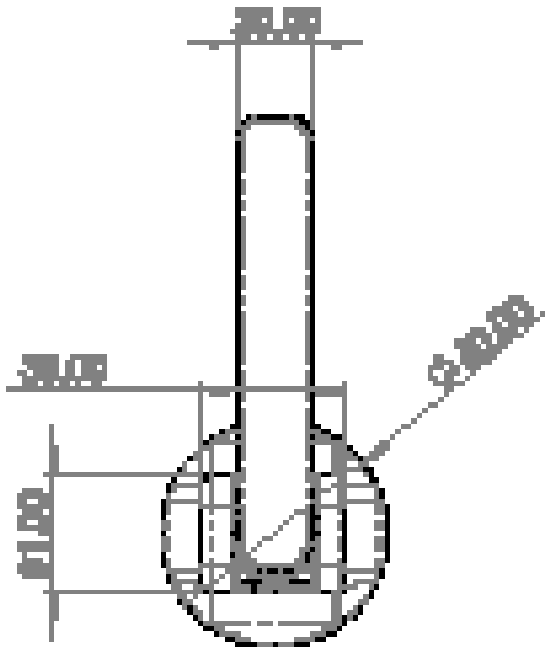


DE COMPOSITION

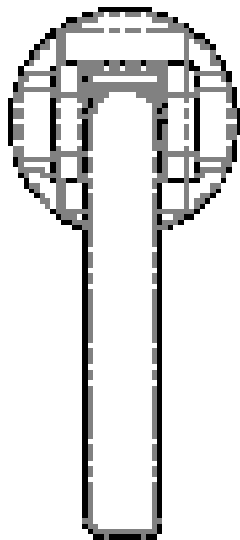


HA COMPOSITION

03
12

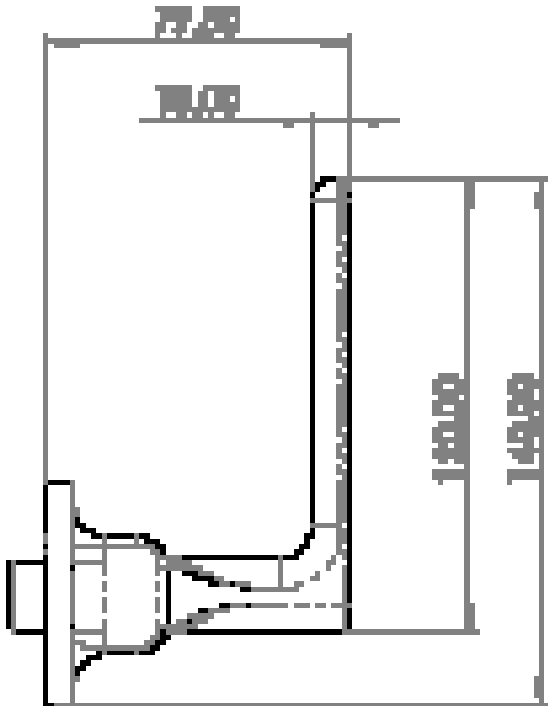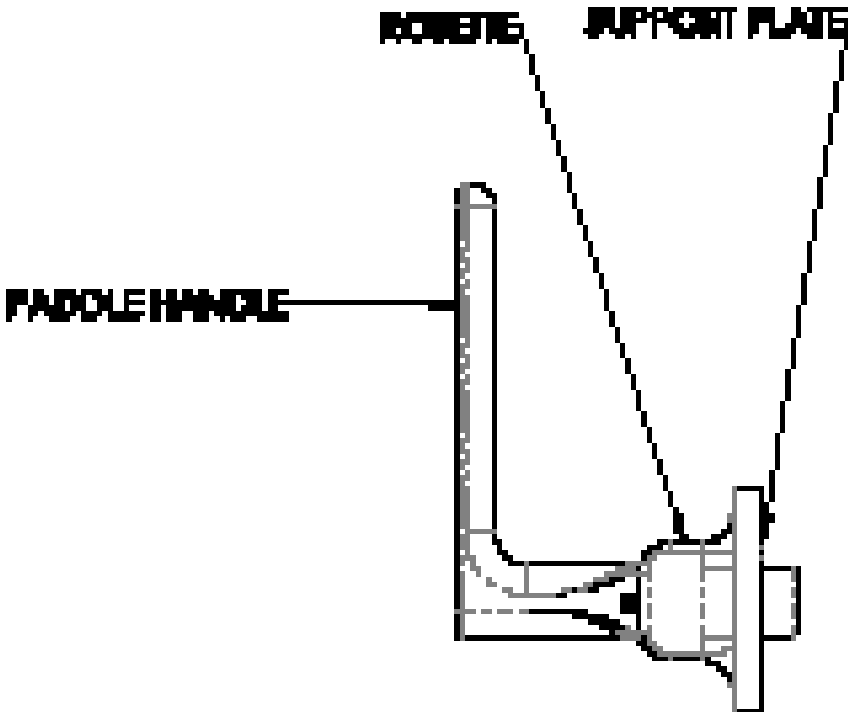

Door Multi-point Locking System

Profile Cylinder & Handle Set Cutout CNC Version

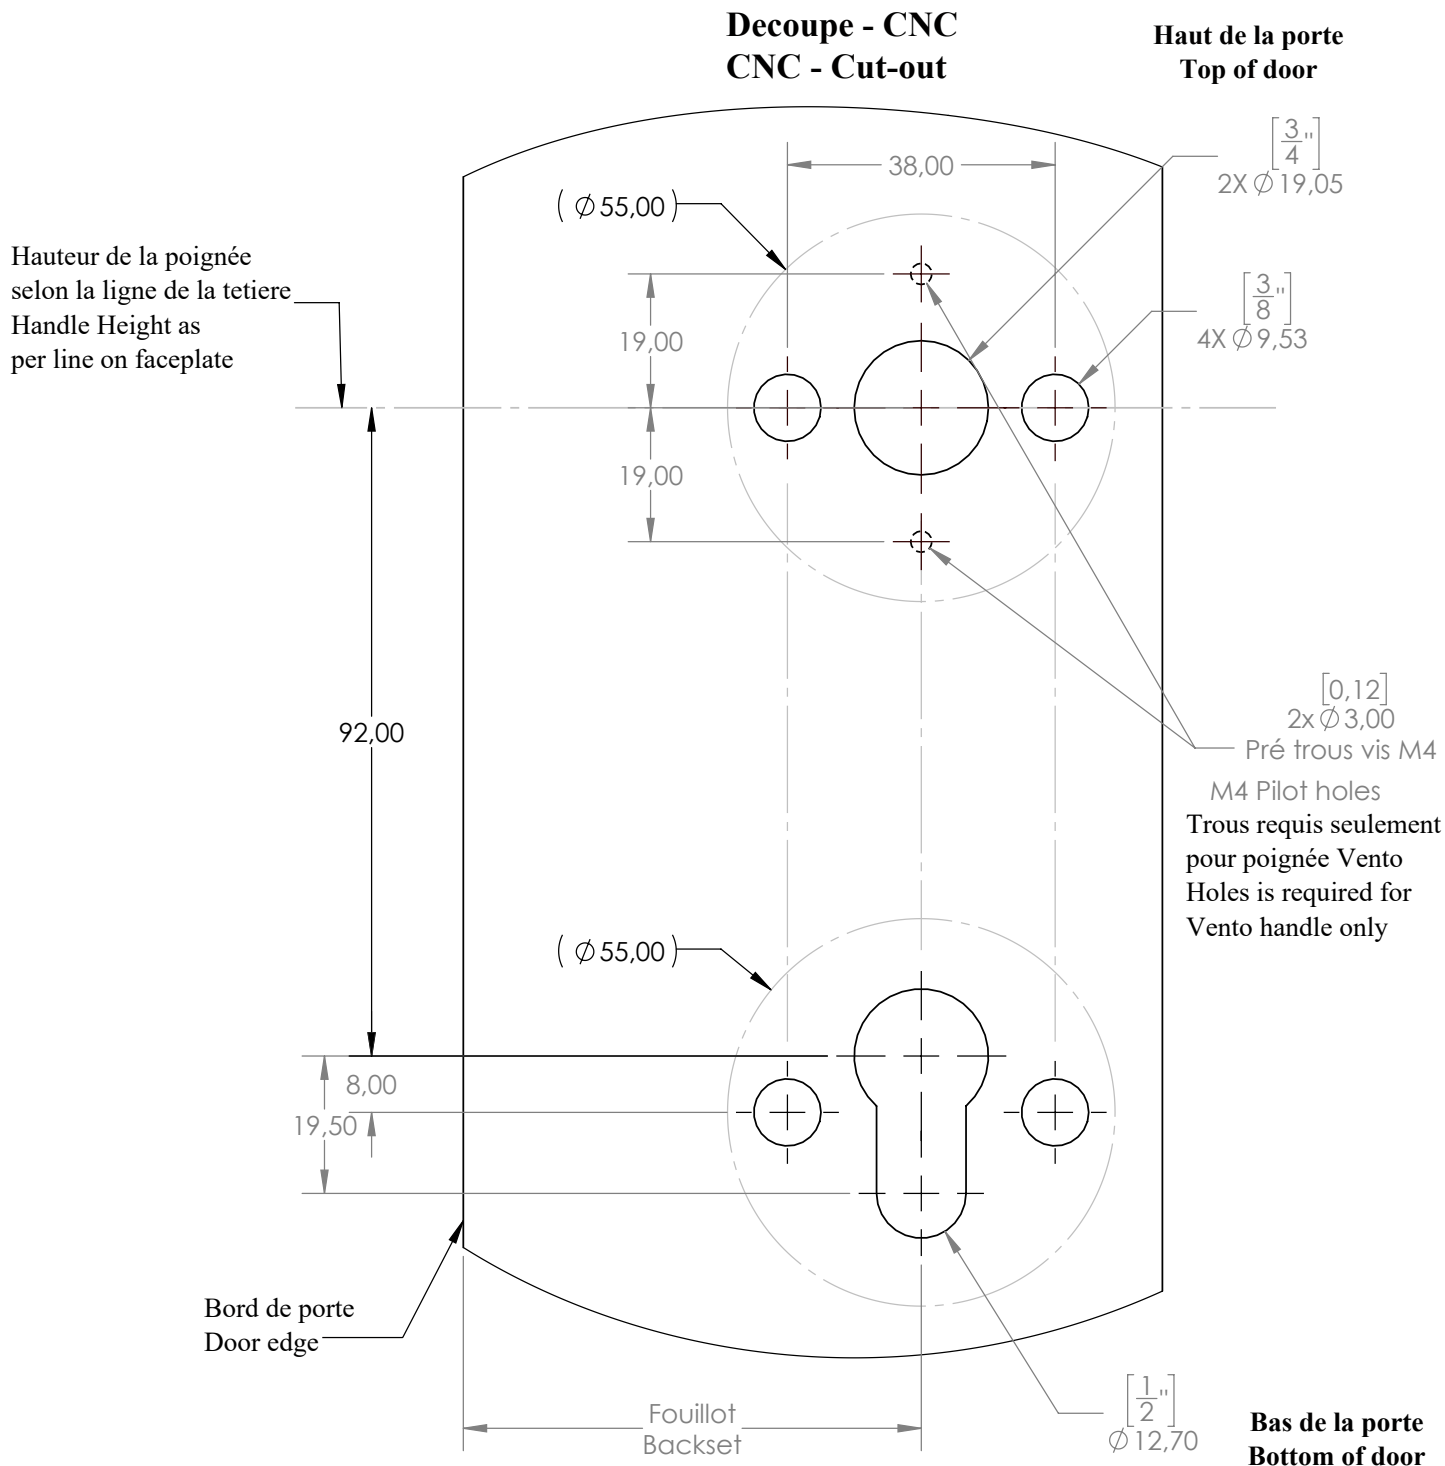


Door Multi-point Locking System

Profile Cylinder & Handle Set Cut-out Drill Version






03
12

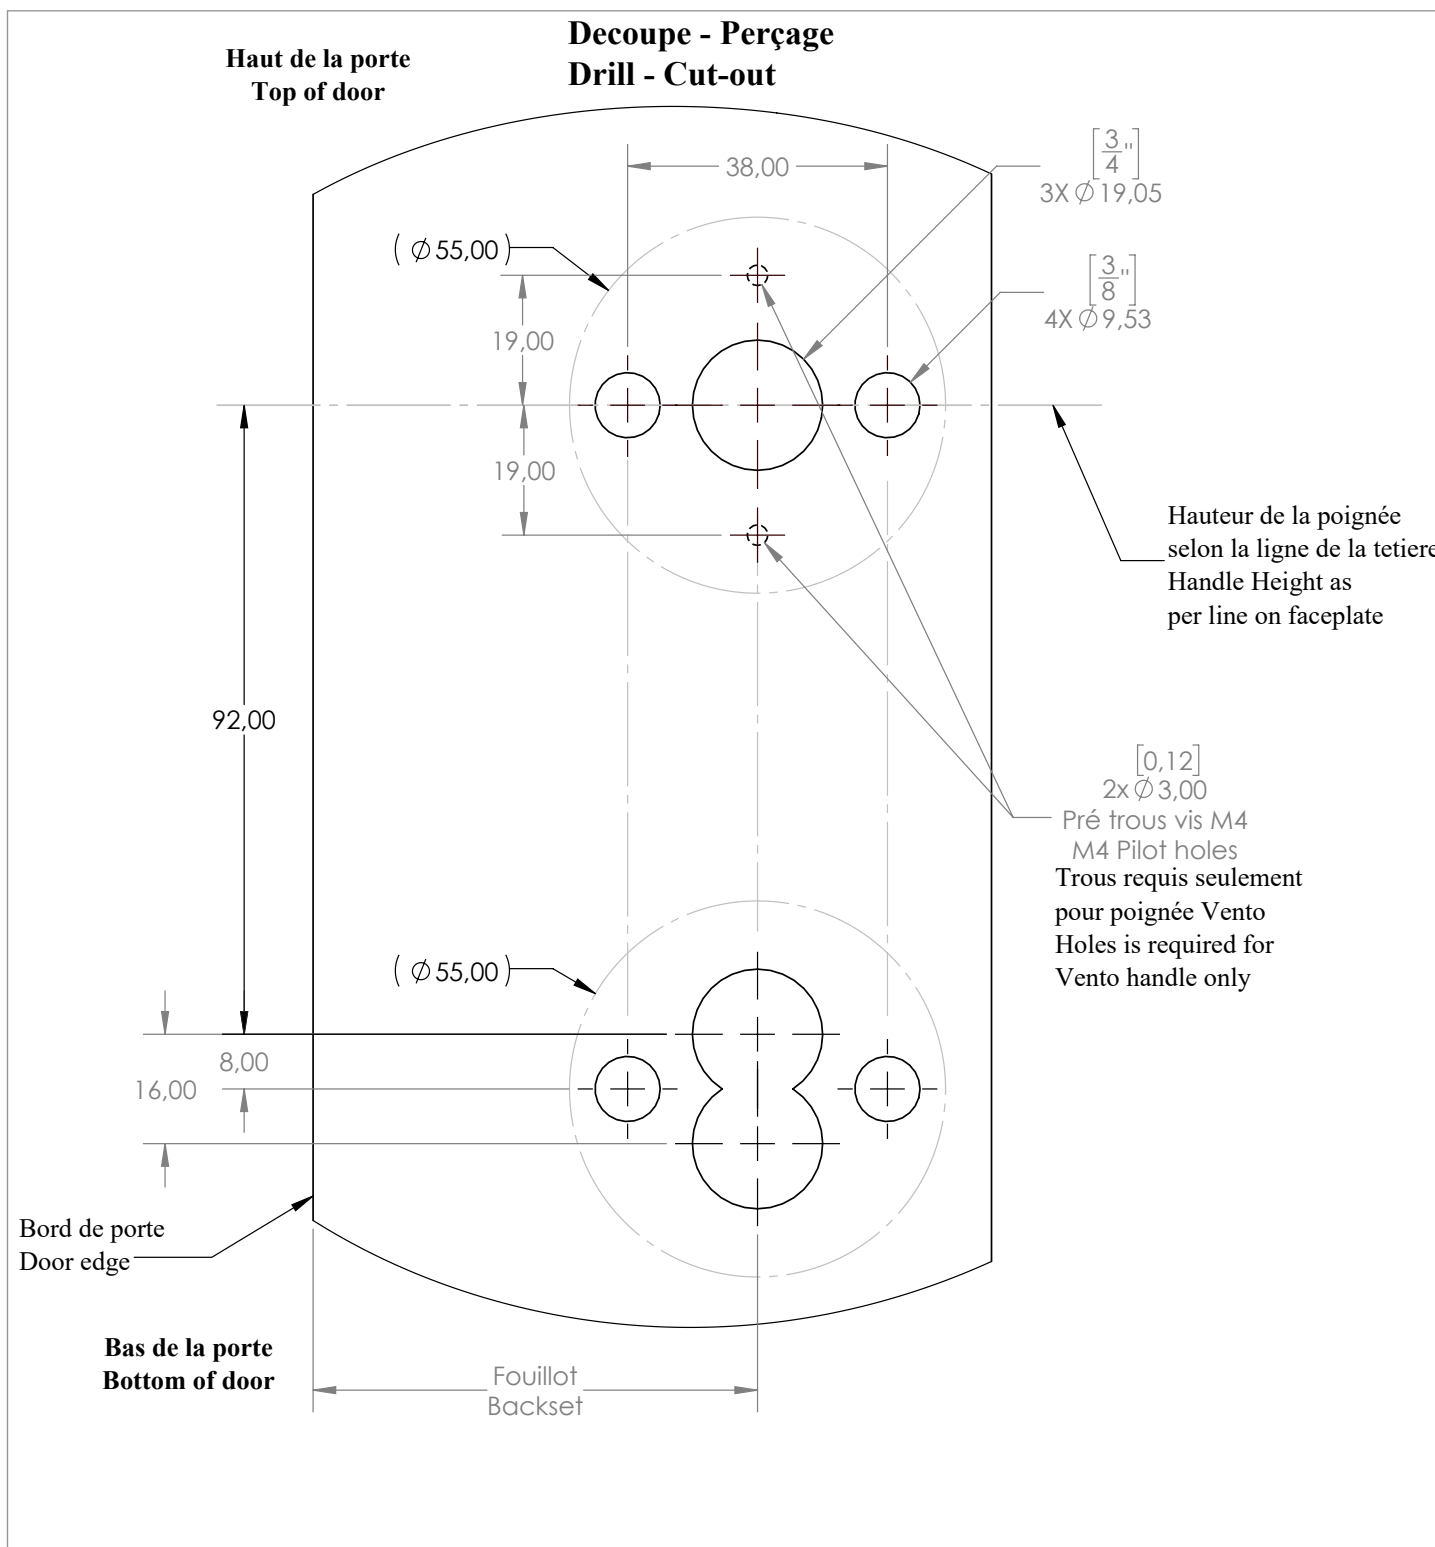

Door Multi-point Locking System

EURO Profile Cylinder 6-U7401-XX

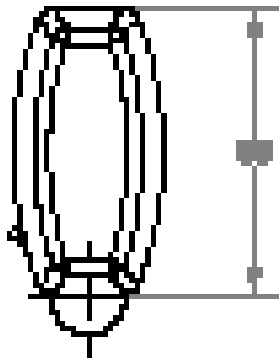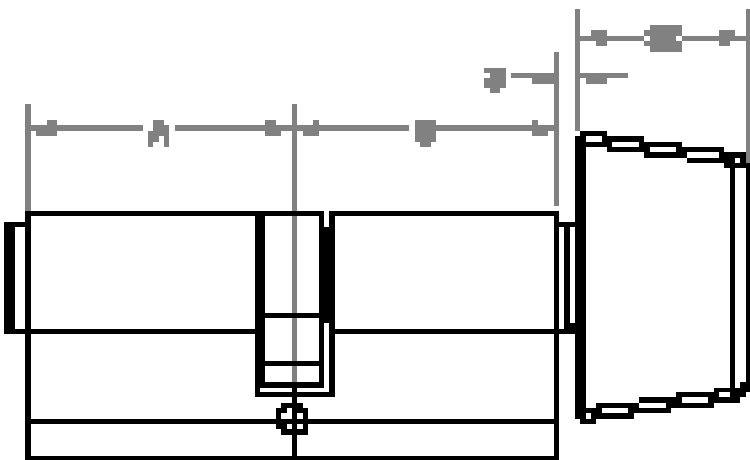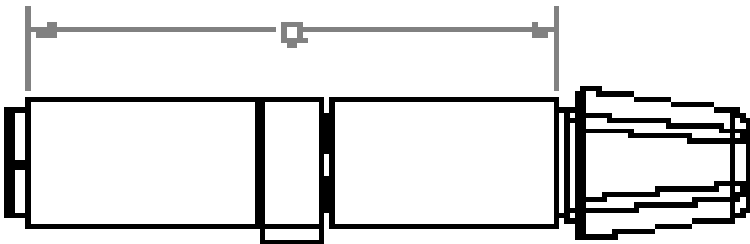

Full cylinder

Part number	Length to center (mm)		Overall length (mm)
	A	B	
6-U7401-44-0-0-E	44	44	44
6-U7401-45-0-0-E	45	45	45
6-U7401-46-0-0-1	46	46	46
6-U7401-47-0-0-1	47	47	47
6-U7401-48-0-0-1	48	48	48


Door Multi-point Locking System

EURO Profile Cylinder For Danalock 6-U7350-MX-0-01




6-U7350-M1-0-01

For 1-3/4" doors

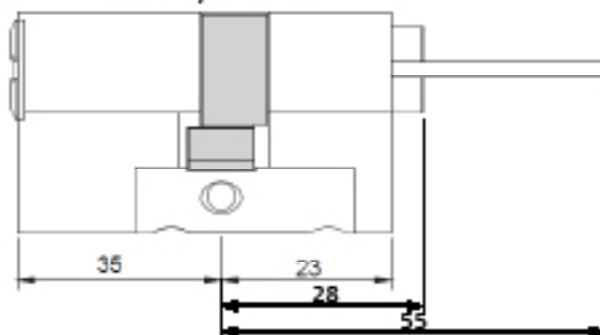


6-U7350-M2-0-01

For 2-1/4" doors

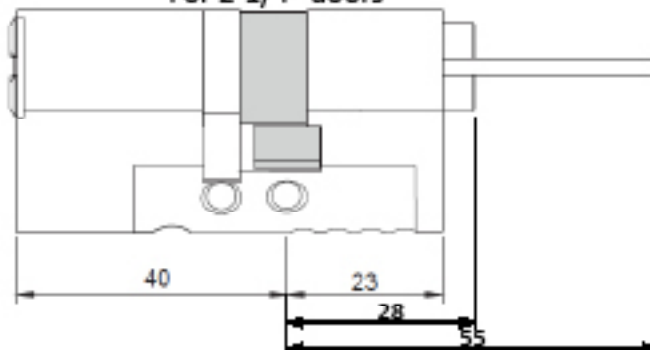

6-U7350-M3-0-01

For 3" doors

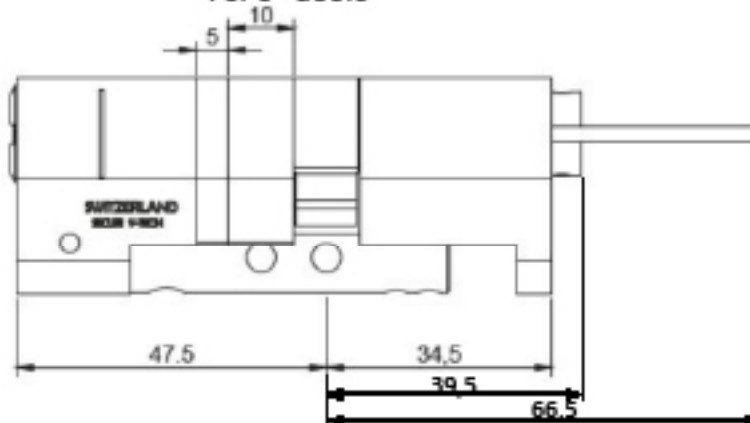


Door Multi-point Locking System

SALTO Profile cylinders for smart lock




6-U7350-M1-0-01

For 1-3/4" doors

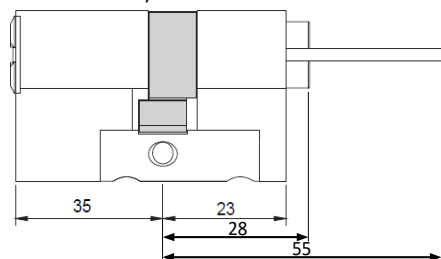


6-U7350-M2-0-01

For 2-1/4" doors

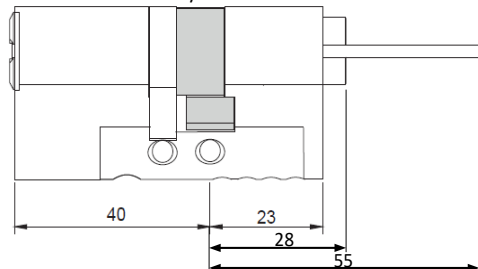

6-U7350-M3-0-01

For 3" doors

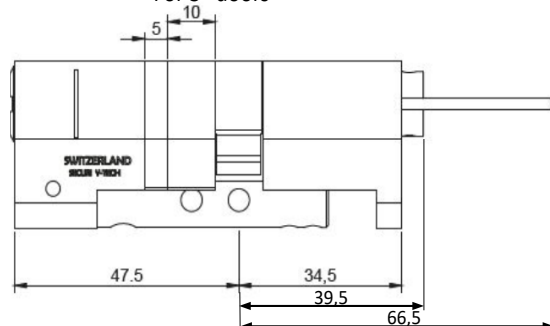

Exterior



Exterior rosette
(7,5/9 mm thick)


Interior



EU spacer*
(6mm thick)



'U' mounting bracket
(1,5mm thick)

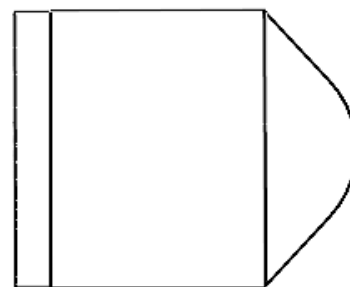



Danalock
(Tail piece depth = min.
5mm, max. 36mm)

Door Multi-point Locking System

Round Straight Pull Bar



6	K-C0341-06-P-6V	400 ± 1.0	610 ± 1.0	MATT BLACK POWDER
5	K-C0341-06-P-8B	400 ± 1.0	610 ± 1.0	SATIN
4	K-C0341-18-P-6V	1400 ± 2.0	1800 ± 2.0	MATT BLACK POWDER
3	K-C0341-18-P-8B	1400 ± 2.0	1800 ± 2.0	SATIN
2	K-C0341-12-P-6V	1000 ± 2.0	1200 ± 2.0	MATT BLACK POWDER
1	K-C0341-12-P-8B	1000 ± 2.0	1200 ± 2.0	SATIN
SR. NO.	CODE	C TO C	SIZE : A	FINISH

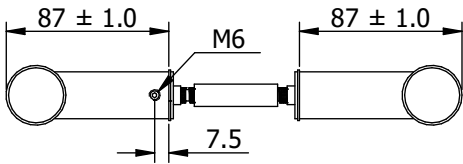
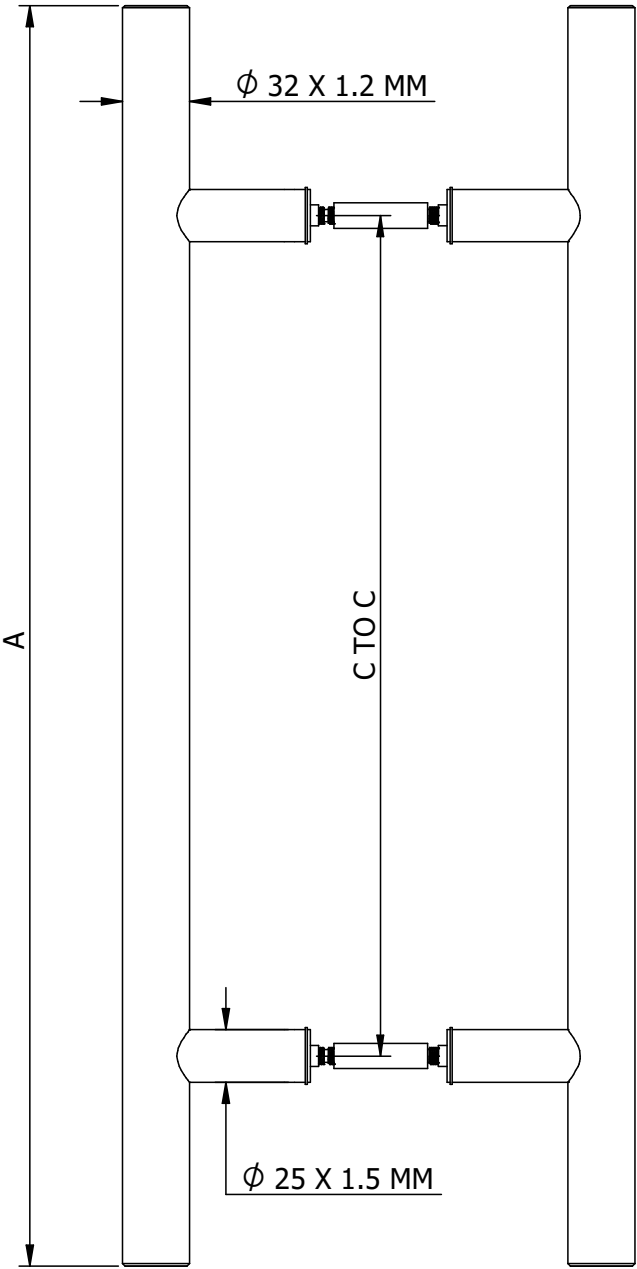


Door Multi-point Locking System

45° Angle Straight Pull Bar



6	K-C0343-06-P-6V	400 ± 1.0	610 ± 1.0	MATT BLACK POWDER
5	K-C0343-06-P-8B	400 ± 1.0	610 ± 1.0	SATIN
4	K-C0343-18-P-6V	1400 ± 2.0	1800 ± 2.0	MATT BLACK POWDER
3	K-C0343-18-P-8B	1400 ± 2.0	1800 ± 2.0	SATIN
2	K-C0343-12-P-6V	1000 ± 2.0	1200 ± 2.0	MATT BLACK POWDER
1	K-C0343-12-P-8B	1000 ± 2.0	1200 ± 2.0	SATIN
SR. NO.	CODE	C TO C	SIZE : A	FINISH

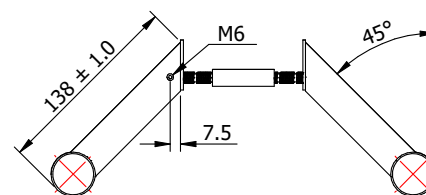
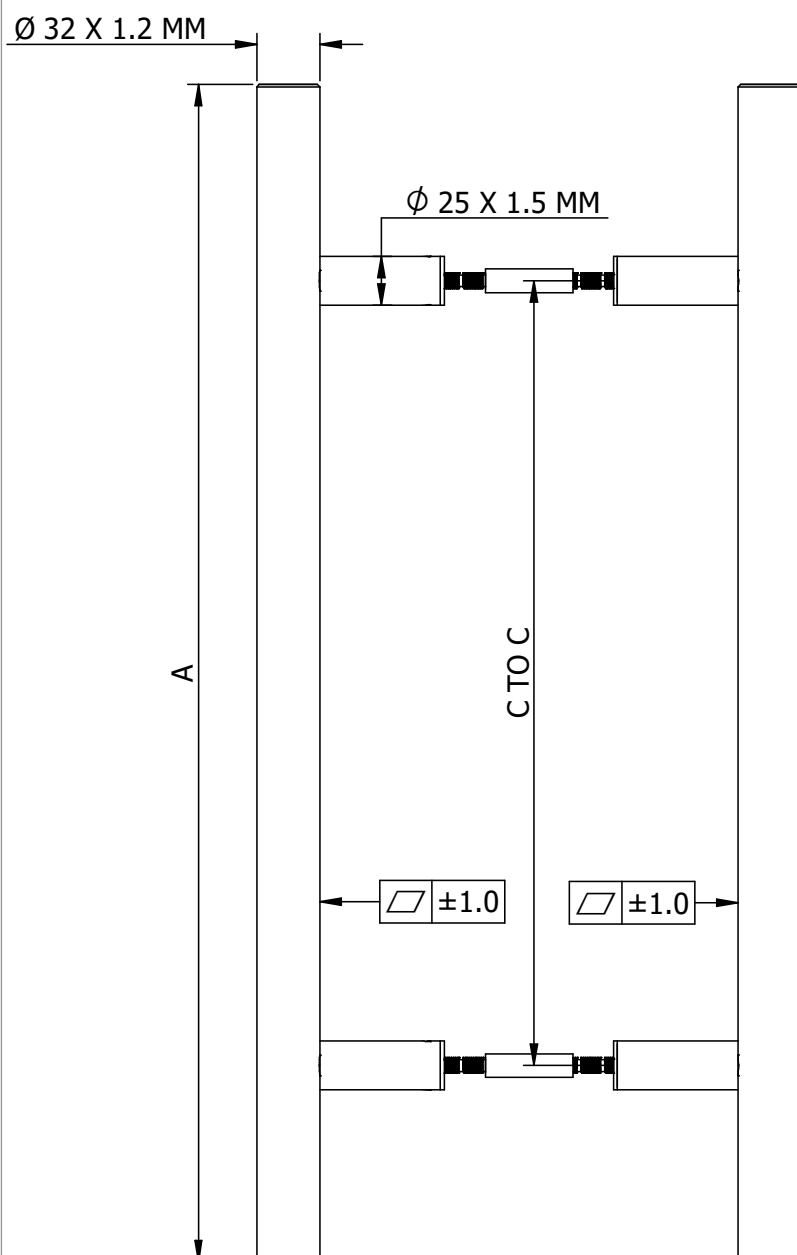


Door Multi-point Locking System

Square Pull Bar




6	K-C0346-18-P-6V	1775 ± 2.0	1800 ± 2.0	MATT BLACK POWDER
5	K-C0346-18-P-8B	1775 ± 2.0	1800 ± 2.0	SATIN
4	K-C0346-12-P-6V	1175 ± 1.0	1200 ± 1.0	MATT BLACK POWDER
3	K-C0346-12-P-8B	1175 ± 1.0	1200 ± 1.0	SATIN
2	K-C0346-06-P-6V	400 ± 1.0	425 ± 1.0	MATT BLACK POWDER
1	K-C0346-06-P-8B	400 ± 1.0	425 ± 1.0	SATIN
SR. NO.	PRODUCT CODE	C TO C	TOTAL LENGTH (A)	FINISH

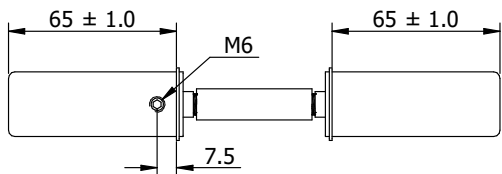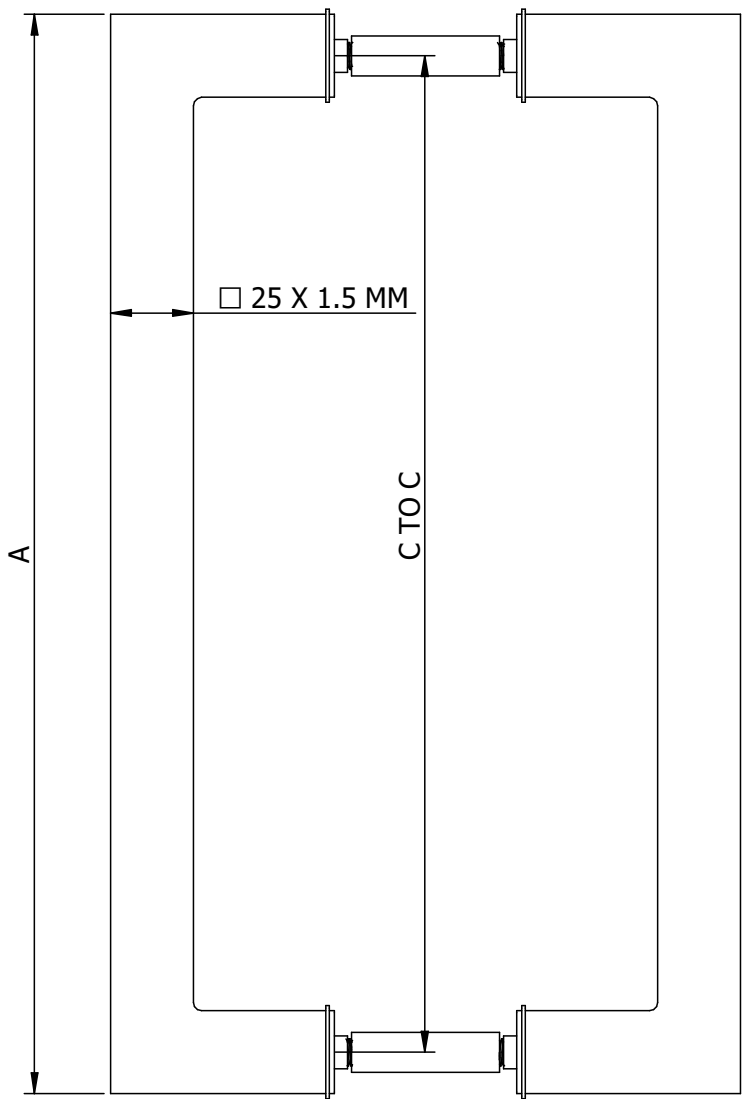




Part Number	Length (A) mm	Fixing centers (B) mm	Ø Hole (C) mm	Ø Spigot (D) mm
EL-CM41-15-P-FE	1500	3000	19	3/8"-6x6
EL-CM41-18-P-FE	1800	3400	19	3/8"-6x6
EL-CM43-15-P-FE	1500	3000	19	3/8"-6x6
EL-CM43-18-P-FE	1800	3400	19	3/8"-6x6
EL-CM46-15-P-FE	1500	3175	19	3/8"-6x6
EL-CM46-18-P-FE	1800	3775	19	3/8"-6x6

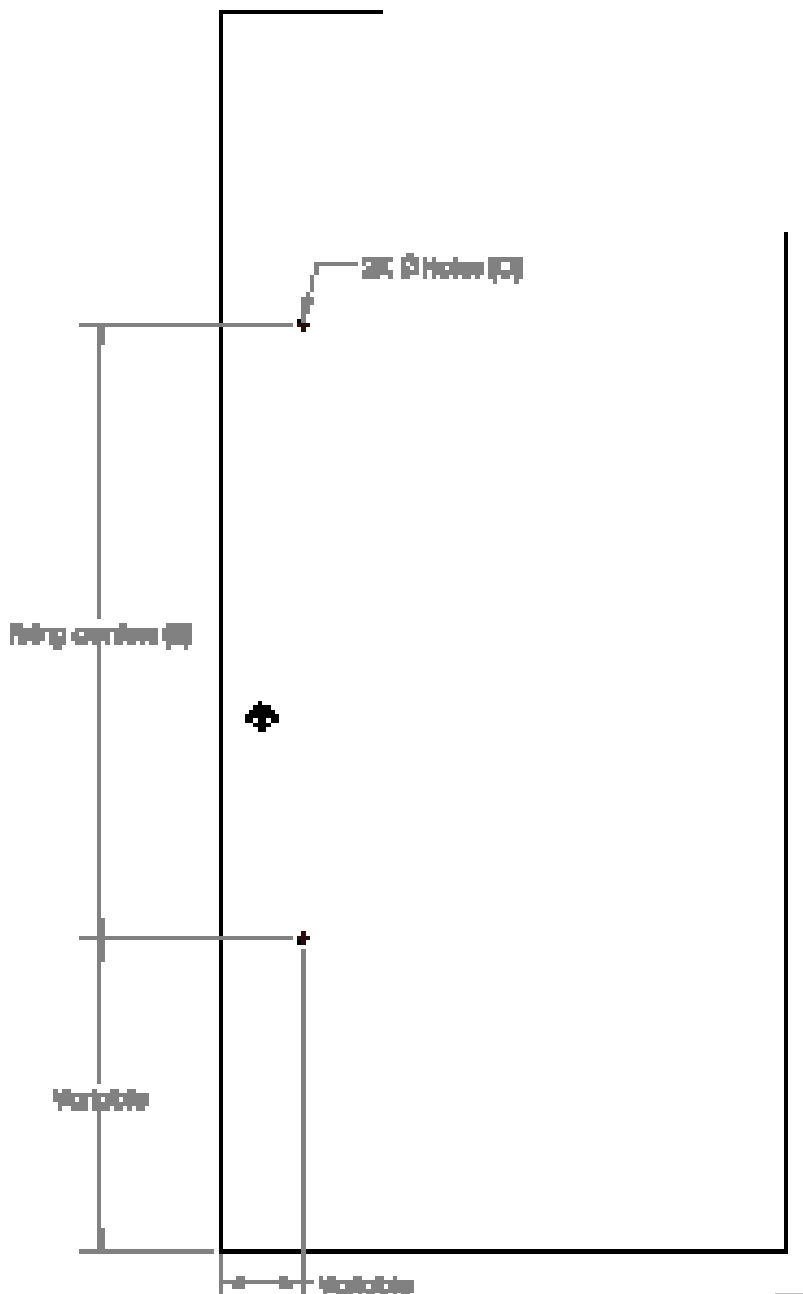




Construction Key

Description	Part Number
Construction key	9-U0001-01-0-0

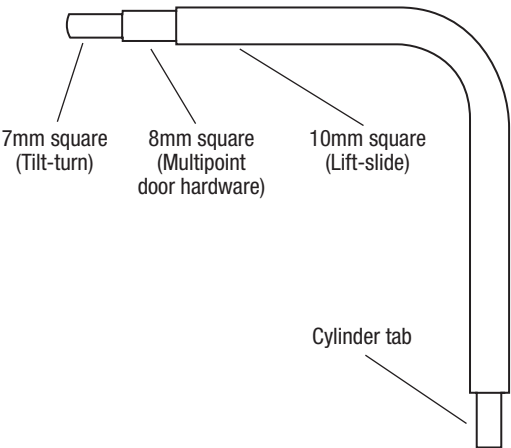


Plastic Cup - With Edge

Description	Part Number
Plastic cup	9-C4765-00-0-6

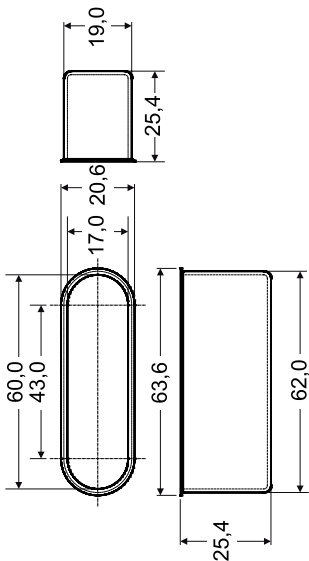


Fixing for Dummy Handles

Description	Part Number
Fixing plate	6-C0800-03-0-0

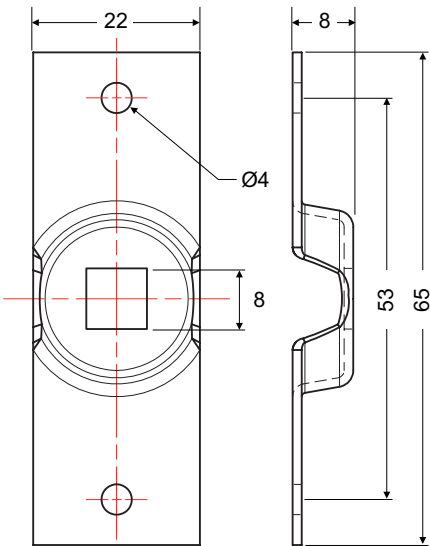


Plastic Cup - No Edge

Description	Part Number
Plastic cup	9-C4765-0A-0-6

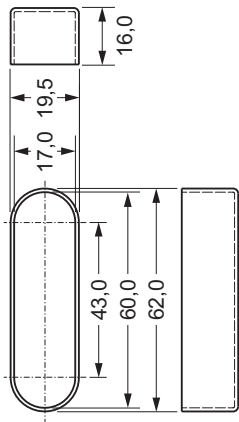



Door Multi-point Locking System

K-C0341-06/12/18-P-XX - Pull Handles Round Installation Instructions

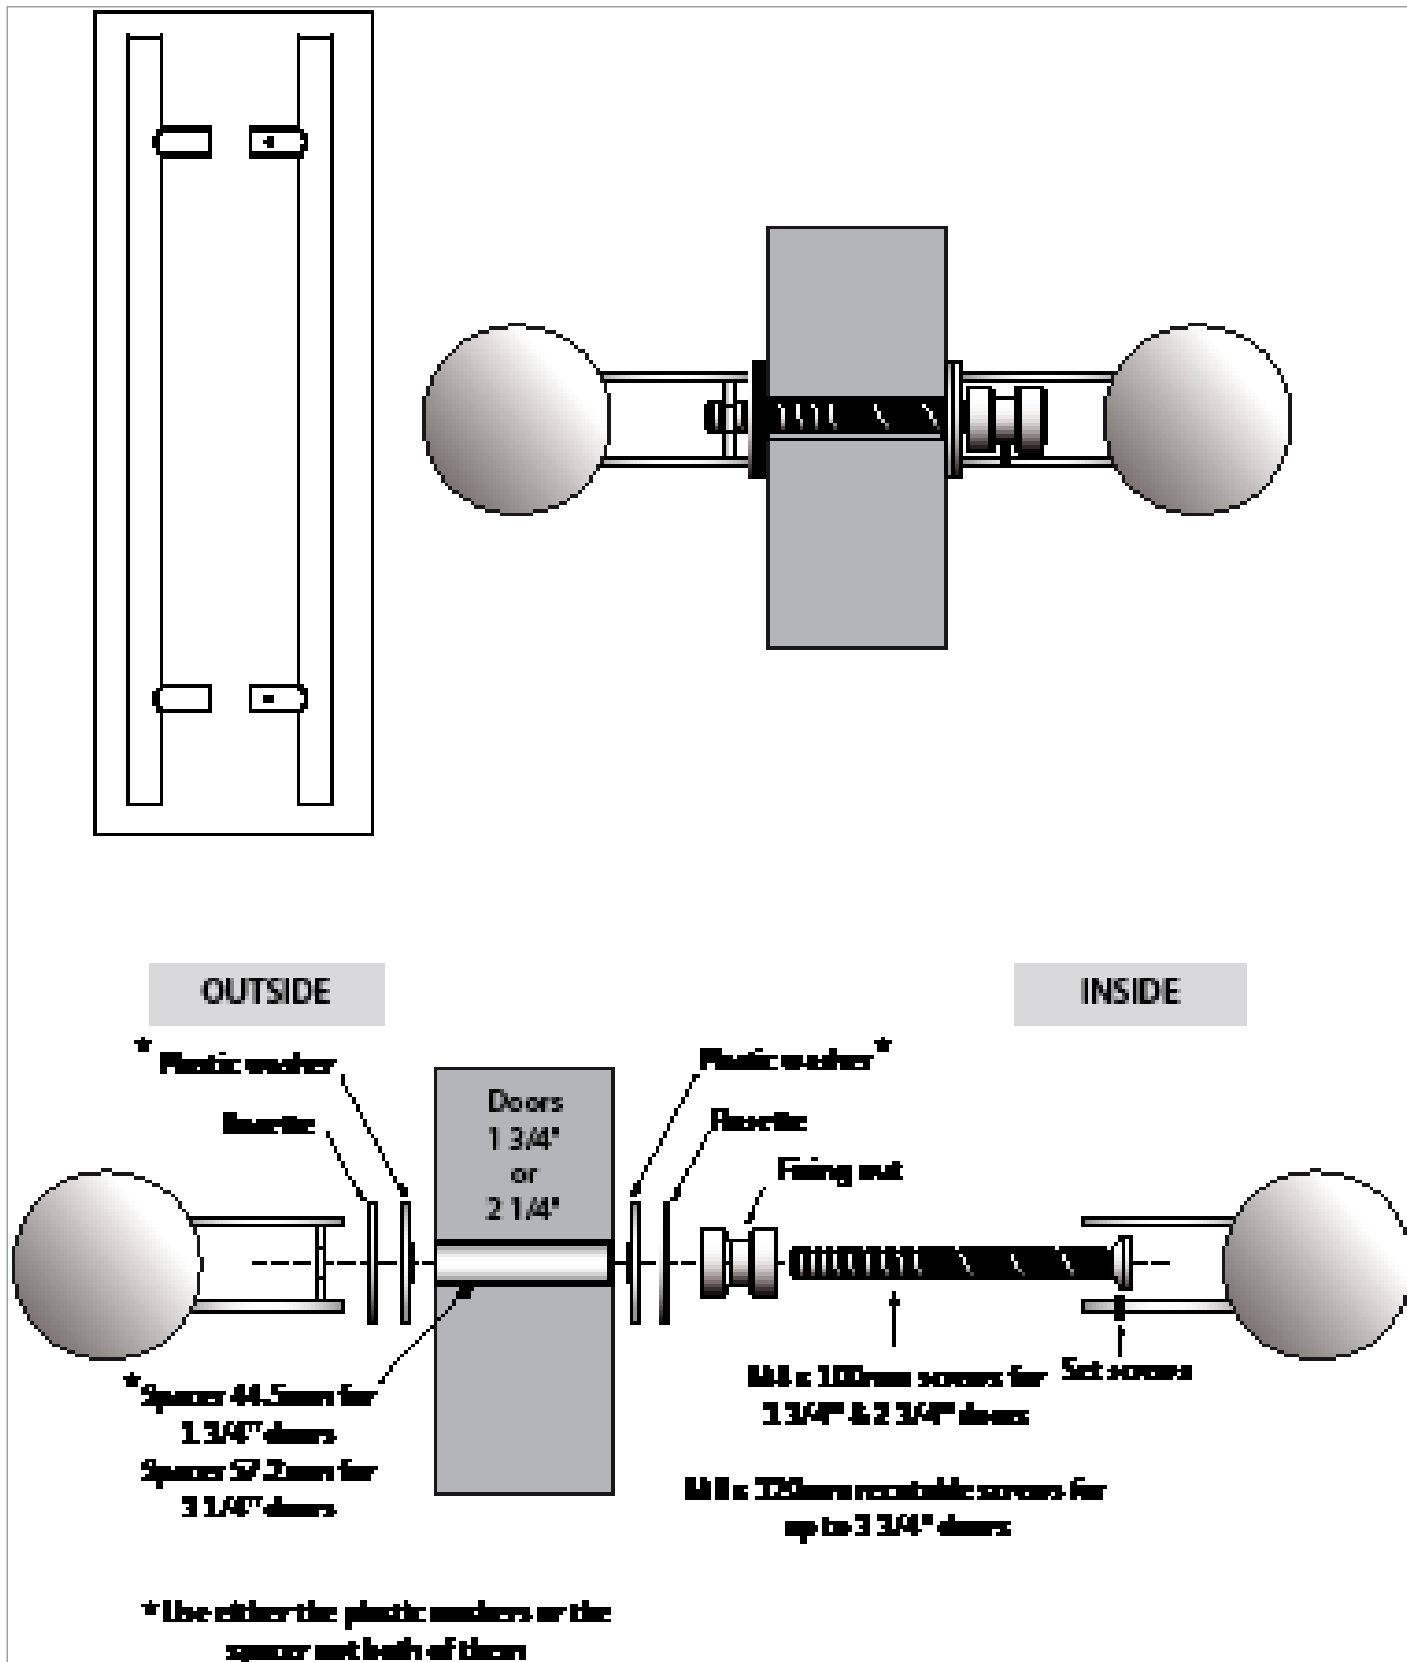


Door Multi-point Locking System

K-C0343-08/12/18-P-XX - Pull Handles Round Angle Installation Instructions

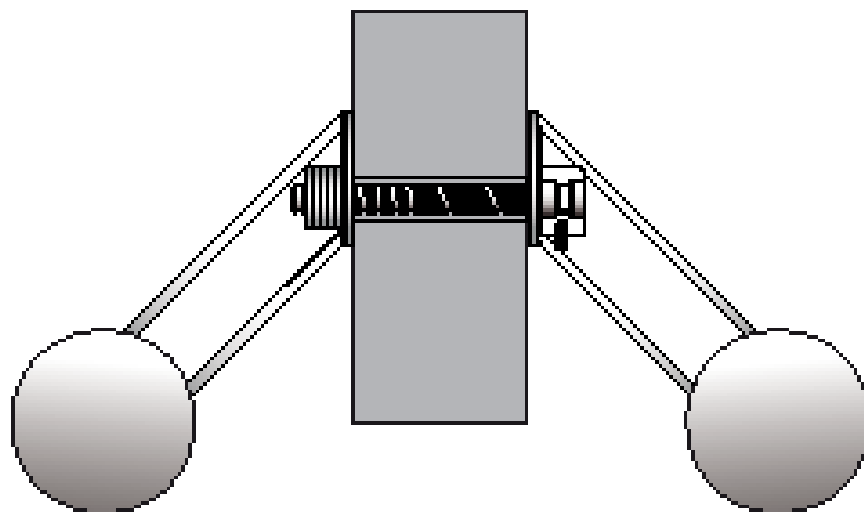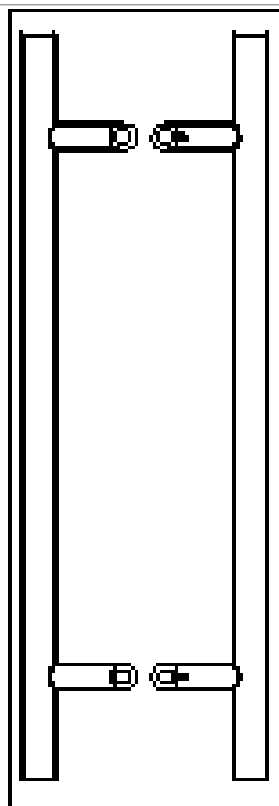

OUTSIDE

INSIDE


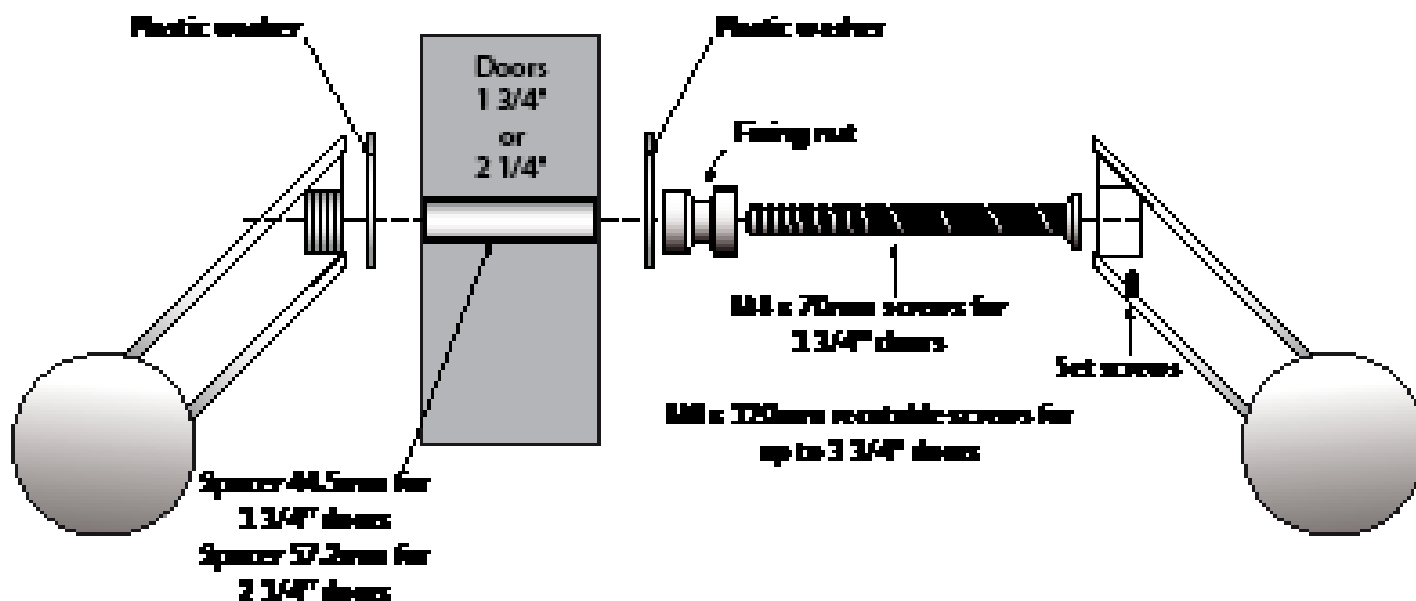


Door Multi-point Locking System

K-C0346-06/12/18-P-XX - Pull Handles Square Installation Instructions




03
12

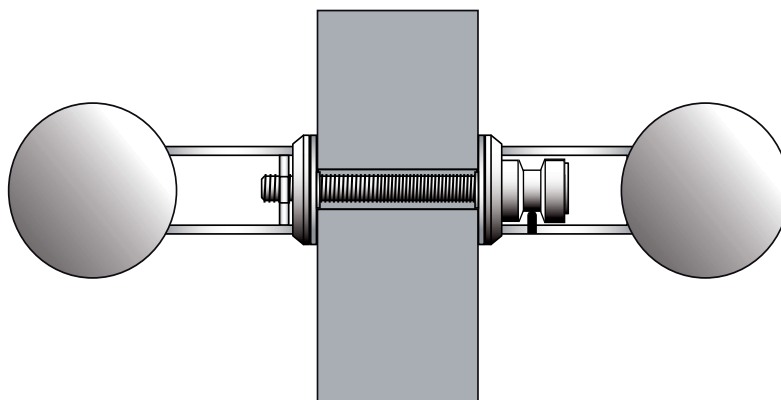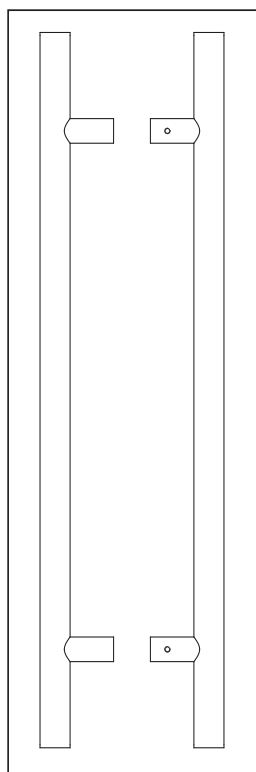



OUTSIDE

INSIDE

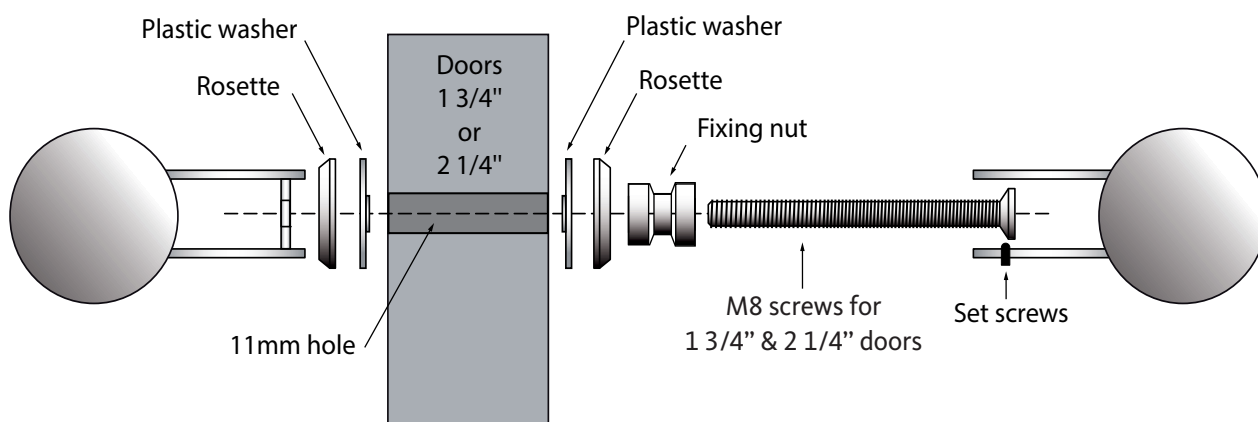

Door Multi-point Locking System

K-C0350-12-P-XX - Pull Handles Rectangular Installation Instructions

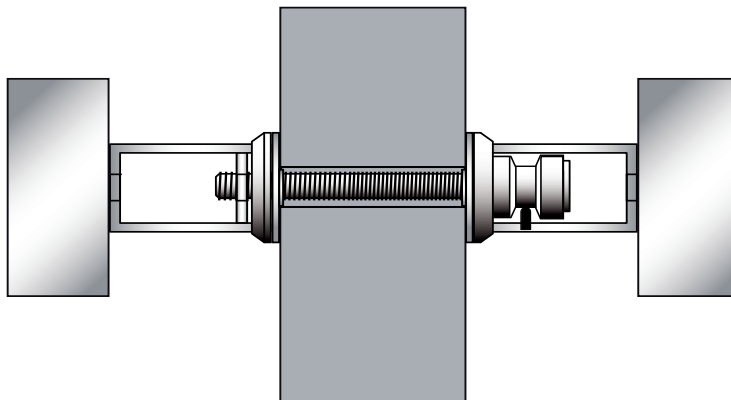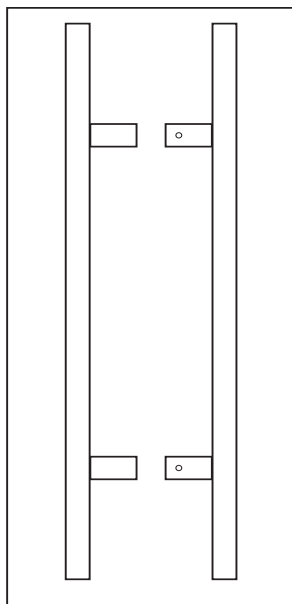

OUTSIDE

INSIDE

