





Securing technology for you







Table of Contents





SECURY Automatic Access Controlled SECURY Automatic Key-operated Door Lock 03.5.3 Filler pieces 03.5.5 Access Control Kits 03.5.6 Code Keypad / Fingerprint Scanner 03.5.9 A-opener Kit 03.5.11

The House Entrance Door Concept

Secure - Convenient - Flexible





The single-door solution providing easy access

The GU house entrance door concept combines security and comfort

- Convenient access with biometric fingerprint recognition or individual access code. Special emphasis has been placed on simple configuration of the system
- Reading directly via the finger scanner or the code keypad, the non-networked system can function without additional computer assistance







- Control via finger scanner or code keypad
- GU-SECURY Automatoc with A-opener
- SECUREconnect 200 wireless transition

SECURY Automatic

with Latch, Deadbolt and 2 Automatic Latchbolts - Rounded Ends









SECURY Automatic Door Lock With Key Open and Lock Function of the Multi-point

Description	Backset	Color	PU	Part Number	
Door lock for 6' 8" doors	35mm	SS	5	6-40526-01-R-8B	
Door lock for 8' doors	35mm	SS	5	6-40526-02-R-8B	
Door lock for 6' 8" doors	45mm	SS	5	6-40526-03-R-8B	
Door lock for 8' doors	45mm	SS	5	6-40526-04-R-8B	
Door lock for 6' 8" doors	55mm	SS	5	6-40526-05-R-8B	
Door lock for 8' doors	55mm	SS	5	6-40526-06-R-8B	
Door lock for 6' 8" doors	65mm	SS	5	6-40526-07-R-8B	
Door lock for 8' doors	65mm	SS	5	6-40526-08-R-8B	
	PLL = Packaging Unit				

Simply Close the Door!

As soon as the door is pulled shut, the Automatic latchbolts instantly throw 20mm and are secured to prevent them from being forced back. By turning the key or the knob, the center deadbolt will engage and lock the top and bottom latchbolts to become a **3-deadbolt locking system**.

- 3-point, one piece locking system for 6' 8" and 8' doors
- Heavy duty mortise construction with reinforced lever return spring system
- Locking by PZ cylinder with 180° turn of key or thumb-turn
- Unlocking with 180° turn to retract the deadbolt and another 180° turn to retract the latches
- No lifting of handle to engage locking points
- Top and bottom Automatic latchbolt projection from 10 to 20mm:
 - Provides security
 - Protects the door
- 3/4" (20mm) throw on deadbolt
- Non handed, latch easily reversible
- 8mm square spindle
- 92mm centres (spindle to cylinder)
- 16mm stainless steel faceplate with radius ends for easy installation and cleaner look
- Same hardware groove detail throughout our entire door lock program (jig, router base and bits available)
- Extension with additional lock point is available for doors taller than 8' (6-33479-04-0-8B)
- 360° turn with profile cylinders

Automatic Extension

with Additional Latchbolt - Radius End









Extension with Additional Latchbolt				
Description	Color	PU	Part Number	
525mm extension with rounded end	Stainless Steel	5	6-33479-04-0-8B	
800mm extension with rounded end	Stainless Steel	1	6-C5078-00-0-8B	
1050mm extension with rounded end	Stainless Steel	1	6-C5062-10-0-8B	
1325mm extension with rounded end	Stainless Steel	1	6-C5062-13-0-8B	
PU = Packaging Unit				

- Tapered latch always engaging in strike plate
- 16mm stainless steel faceplate with radius end for easy installation and cleaner look
- Additional locking point for doors taller than 8'
- To be used with GU-SECURY Automatic door locks

Filler pieces

Round to square







Filler Pieces Round to square		
Description	PU	Part Number
Filler piece 193,7mm x 16 mm	1	9-C4340-19-0-8B
Filler piece 245,9 mm x 16 mm	1	9-C4342-24-0-8B
Filler piece 342,3 mm x 16 mm	1	9-C4342-34-0-8B
	PU = Pa	ckaging Unit

Additional information

- Made of stainless steel
- To be used with radius end locks and extensions

Formulas to select filler length:

- Bottom:
 - L = Handle height 720,7mm
- Top 1590mm lock:
 - L = Door height handle height extension(s) length 871,7mm
- Top 1900mm lock:
 - L = Door height handle height extension(s) length 1181,7mm

Access Control Kits

DOOR LEAF MOUNTED







DOOR LEAF MOUNTED Code Keypad Kit		
Description	PU	Part Number
Code keypad kit	1	K-C1440-51-0-0
	PU = Pa	ckaging Unit

Additional information

- Package contains:
 - Code keypad (K-C5560-20-4-8)
 - A-opener (K-C8153-01-0-0)
 - SECURE Connect 200 (K-C5560-20-4-6)
- SECURE Connect faceplates must be bought separately (9-C4793-OX-0-8B)
- Power supply can be bought separately (6-C9405-00-0-00)
- Refer to wire Diagram Option 3



DOOR LEAF MOUNTED Fingerprint Scanner Kit			
Description PU Part Number			
Fingerprint scanner kit	1	K-C1440-01-0-0	
PU = Packaging Unit			

- Package contains:
 - Fingerprint scanner (K-C5560-23-4-8)
 - A-opener (K-C8153-01-0-0)
 - SECURE Connect 200 (K-C5560-20-4-6)
- SECURE Connect faceplates must be bought separately (9-C4793-0X-0-8B)
- Power supply can be bought separately (6-C9405-00-0-00)
- Refer to wire Diagram Option 3

^{*} Do not install the SECUREconnect if conditions require a higher protection class than IP 40

Access Control Kits

FRAME MOUNTED







FRAME MOUNTED Code Keypad Kit		
Description	PU	Part Number
Code keypad kit	1	K-C1440-51-0-0
Cable relay -6 (One required)	1	B-55600-21-4-6
	PU = Pa	ackaging Unit

Additional information

- Package contains:
 - Code keypad (K-C5560-20-4-8)
 - A-opener (K-C8153-01-0-0)
 - SECURE Connect 200 (K-C5560-20-4-6)
- One cable relay -6 (B-55600-21-4-6) must be bought separately
- SECURE Connect faceplates must be bought separately (9-C4793-OX-O-8B)
- Power supply can be bought separately (6-C9405-00-0-00)
- Refer to wire Diagram Option 6



FRAME MOUNTED Fingerprint Scanner Kit			
Description PU Part Number			
Fingerprint Scanner Kit	1	K-C1440-01-0-0	
Cable relay -6 (One required)	1	B-55600-21-4-6	
	PU = Pa	ckaging Unit	

- Package contains:
 - Fingerprint scanner (K-C5560-23-4-8)
 - A-opener (K-C8153-01-0-0)
 - SECURE Connect 200 (K-C5560-20-4-6)
- One cable relay -6 (B-55600-21-4-6) must be bought separately
- SECURE Connect faceplates must be bought separately (9-C4793-OX-0-8B)
- Power supply can be bought separately (6-C9405-00-0-00)
- Refer to wire Diagram Option 6

^{*} Do not install the SECUREconnect if conditions require a higher protection class than IP 40

Access Control Kits

WALL MOUNTED







WALL MOUNTED Code Keypad Kit		
Description	PU	Part Number
Code keypad kit	1	K-C1440-73-0-0
	PU = Pa	ckaging Unit

Additional information

- Package contains:
 - Code keypad (K-C5560-20-1-8)
 - A-opener (K-C8153-01-0-0)
 - SECURE Connect 200 (K-C5560-20-4-6)
- Relay unit included (Not show on image)
- SECURE Connect faceplates must be bought separately (9-C4793-OX-O-8B)
- Power supply can be bought separately (6-C9405-00-0-00)
- Refer to wire Diagram Option 4



WALL MOUNTED Fingerprint Scanner Kit		
Description	PU	Part Number
Fingerprint scanner kit	1	K-C1440-61-0-0
	PU = Pa	ckaging Unit

- Package contains:
 - Fingerprint scanner (K-C5560-23-1-8)
 - A-opener (K-C8153-01-0-0)
 - SECURE Connect 200 (K-C5560-20-4-6)
- Relay unit included (Not show on image)
- SECURE Connect faceplates must be bought separately (9-C4793-OX-O-8B)
- Power supply can be bought separately (6-C9405-00-0-00)
- Refer to wire Diagram Option 4

^{*} Do not install the SECUREconnect if conditions require a higher protection class than IP 40

SEPARATE COMPONENTS

Code Keypad/Fingerprint Scanner







Door leaf / Frame mounted Code Keypad			
Description	Color	PU	Part Number
Code keypad	Stainless steel	1	K-C5560-20-4-8
PU = Packaging Unit			

Additional information

- High-quality housing
 - cast and waterproof for outdoor use
- Stainless steel keyboard and faceplate
- Intelligent and time-controlled locking keyboard mechanisms to combat manipulation
- Encrypted communication
- Optimum installation height of 1.2 m upwards (for child safety)
- Can only be used in combination with SECURE Connect



Door leaf / Frame mounted Fingerprint Scanner			
Description	Color	PU	Part Number
Fingerprint scanner	Stainless steel	1	K-C5560-23-4-8
		PU = Pa	ckaging Unit

- High-quality housing
 - cast and waterproof for outdoor use
- Stainless steel faceplate
- False rejection rate minimized to nearly "zero"
- Highest biometric security standardsprogramming without any code
- Self-learning fingerprint
- Optimum installation height of 1.2 m upwards (for child safety)
- Can only be used in combination with SECURE Connect

SEPARATE COMPONENTS

Code Keypad/Fingerprint Scanner







Wall mounted Code Keypad			
Description	Color	PU	Part Number
Code keypad	Stainless steel	1	K-C5560-20-1-8
PU = Packaging Unit			

Additional information

- High-quality housing
 - cast and waterproof for outdoor use
- Stainless steel keybord and faceplate
- Intelligent and time-controlled locking mechanisms to combat manipulation
- Encrypted communication
- Optimum installation height of 1.2 m upwards (for child safety)
- Can only be used in combination with SECURE Connect
- Relay unit included (Not show on image)



Wall mounted Fingerprint Scanner				
Description Color PU Part Number				
Fingerprint scanner Stainless steel 1 K-C5560-23-1-8				
PU = Packaging Unit				

- High-quality housing
 - cast and waterproof for outdoor use
- Stainless steel faceplate
- False rejection rate minimized to nearly "zero"
- Highest biometric security standards
 - programming without any code
- Self-learning fingerprint
- Optimum installation height of 1.2 m upwards (for child safety)
- Can only be used in combination with SECURE Connect
- Relay unit included (Not show on image)


5

GU-SECURY A-opener

Opening Motor





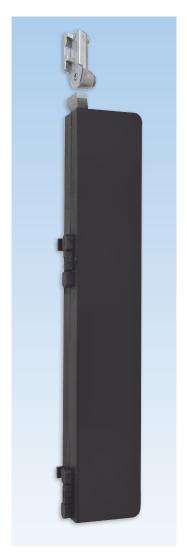



A-opener Kit			
Description	Color	PU	Part Number
A-opener kit with connecting cables	Black	1	K-C8153-01-0-0
PU = Packaging Unit			ckaging Unit

- The GU-SECURY Automatic lock with motorized A-opener retracts the latches
- Once the door panel is closed, it can be opened from the outside or inside via an impulse transmitter. That will signal the A-opener to retract the latches
- If the deadbolt is engaged the system is inoperative and requires a key from the exterior or thumbturn to unlock

SECURE Connect 200

Wireless Power and Data Transmission







SECUREconnect 200 Unit			
Description	Color	PU	Part Number
SECUREconnect 200	Black	1	K-C5560-20-4-6
PU = Packaging Unit			

The intelligent solution for the door system

More security and convenience. SECURE Connect 200 for wireless power and data transmission between frame and door leaf.

- Easy installation in timber, PVC and metal door systems
- Short-circuit proof power transmission to the door leaf
- Tamper protection via encoded telegram interface
- Faceplates must be bought separately (9-C4793-0X-0-8B)



^{*} Do not install the SECUREconnect if conditions require a higher protection class than IP 40

Faceplate

for SECURE Connect Unit






Faceplate			
Description	Color	PU	Part Number
Faceplate 16mm wide with rounded ends (two required)	Stainless Steel	1	9-C4793-01-0-8B
Faceplate 20mm wide with rounded ends (two required)	Stainless Steel	1	9-C4793-03-0-8B
PU = Packaging Unit			

Additional information

- 16 or 20mm stainless steel faceplate with radius ends for easy installation and cleaner look
- Mounting screws included with Secure Connect 200 unit (K-C5560-20-4-6)
- Fastening screws not included (9-C5362-32-0-8)

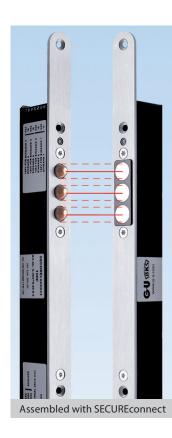



03 5

Cable Duct

Concealed Cable Transition








Concealed Cable Duct			
Description	Color	PU	Part Number
Cable duct	Zinc	1	6-29854-00-0-0
PU = Packaging Unit			

Additional information

■ Installation screws are included



Power Supply







Power Supply 24V DC			
Description	Color	PU	Part Number
	Black	1	6-C9405-00-0-0
PU = Packaging Unit			


- Plug-in wall adapter
- Input: 100-240 VAC @ 50/60 Hz
- Output: 24V DC, 2A, 48W
- Screw terminals output

Push-Pull Handle

Contemporary Round






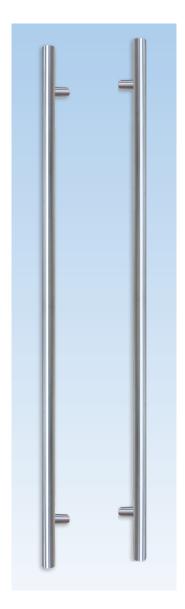

Rounded Straight Handle				
Description		PU	Part Number	
Double pull bars Length (A) = 1200mm Fixing centers (B) = 1000mm		1	K-C0341-12-P-*	
Double pull bars Length (A) = 1800mm Fixing centers (B) = 1400mm		1	K-C0341-18-P-*	
8B = Stainless Steel, 6V = Matte Black	* = Color	PU = Pa	ackaging Unit	



- Made of stainless steel 304
- Fastening kit included with M8 screws for 1 3/4" up to 3 3/4" doors
- Bushing included in the kit

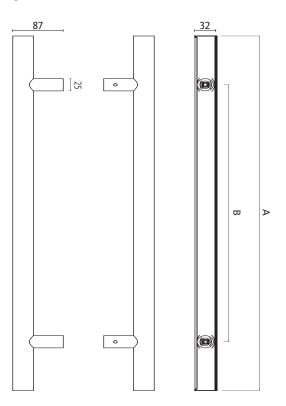

Push-Pull Angle Handle

Contemporary Round








Rounded 45° Offset Handles				
Description		PU	Part Number	
Double pull bars Length (A) = 1200mm Fixing centers (B) = 1000mm		1	K-C0343-12-P-*	
Double pull bars Length (A) = 1800mm Fixing centers (B) = 1400mm		1	K-C0343-18-P-*	
8B = Stainless Steel, 6V = Matte Black	* = Color	PU = Pa	ackaging Unit	



Additional information

- Made of stainless steel 304
- Gives more clearance to the door jamb
- Fastening kit included with M8 screws for 13/4" up to 33/4" doors
- Bushing included in the kit

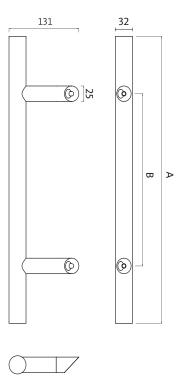




Edition 05.2025

Push-Pull Handle

Contemporary Square






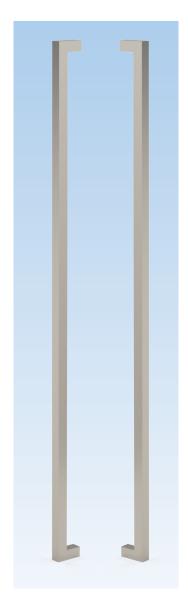





- Made of stainless steel 316
- Fastening kit included with M8 screws for 13/4" up to 3 3/4" doors
- Bushing included in the kit

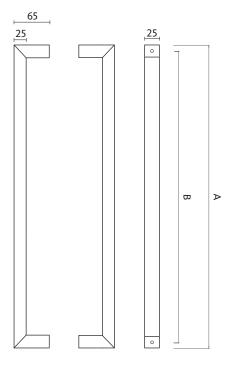


Push-Pull Angle Handle

Contemporary Rectangular






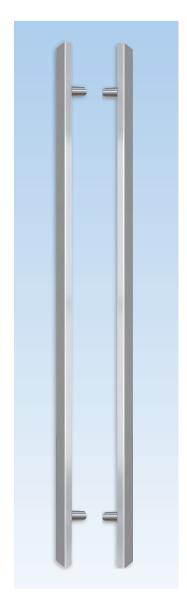

Rectangular Straight Handle				
Description		PU		Part Number
Double pull bars Length (A) = 1200mm Fixing centers (B) = 1000m	m	1		K-C0350-12-P-6
6 = Black	6	PU =	PU = Packaging Unit	


- Made of stainless steel
- Fastening kit included with M8 screws for 1 3/4" and 2 1/4" doors

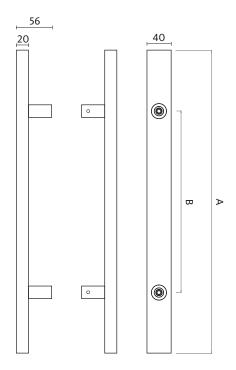

for Pull Bars





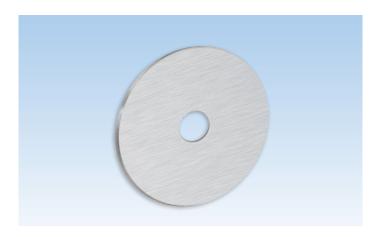

Kit of Supporting Plate for Pull Bars				
Description Color PU Part Number				
Kit of 4 gound supporting plates for steel doors	Stainless Steel	1	K-C0960-00-0-8B	
Kit of 4 round supporting plates for steel doors	Black	1	K-C0960-00-0-6	
PU = Packaging Unit				



PEEK Cream Cleaner		
Description	PU	Part Number
100mL tube	1	9-C9030-00-0-0
	PU = Pa	ckaging Unit

Additional information

- Cleans, polishes and protects the surface
- Leaves behind a light and invisible protective coating




Kit of Roller Latch			
Description	Color	PU	Part Number
Adjustable roller latch	Zinc	1	6-C0522-00-0-1
Adjustable roller latch	Black	1	6-C0522-00-0-6
PU = Packaging Unit			

- Made of brass, zinc plated
- Adjustment for door gap
- Adjustment spring tension on roller
- Strike plate and 4 screws (#8 x 25.4mm) included for 1 3/4" doors

for Pull Bars







Replacement parts for Rectangular Handles				
Description Color PU Part Number				
Kit of replacement part	Stainless Steel	1	6-C0535-00-0-8B	
PU = Packaging Unit				

Additional information

■ Use with K-C0350-12-P-6




Replacement parts for Rounded Straight Handles			
Description Color PU Part Number			
Kit of replacement part	Stainless Steel	1	K-C0341-KT-0-*
* = Color		PU = Pa	ckaging Unit

8B = Stainless Steel, 6V = Matte Black



Additional information


■ Use with K-C0341-*



Replacement parts for Rounded 45 deg Handles				
Description Color PU Part Number				
Kit of replacement part Stainless Steel 1 K-C0343-KT-0-8B				
PU = Packaging Unit				

Additional information

■ Use with K-C0343-* finishing colors 8B & 6V



Replacement parts for square Handles				
Description Color PU Part Number				
Kit of replacement part	Stainless Steel	1	K-C0346-KT-0-*	
* = Color PU = Packaging Unit		ckaging Unit		

8B = Stainless Steel, 6V = Matte Black



Additional information

■ Use with K-C0346-*

Smart locks







Smart lock		
Description	PU	Part Number
Tedee PRO Smart Lock	1	6-C9370-00-0-*
	PU = Pa	kaging Unit
1 = Silver, 6 = Black		-



Additional information

- Rechargeable 3000 mAh LiPo battery (included)
- Bluetooth BLE 5.0 2,4 GHz (Tedee app) and Internet connection
- Security TLS 1.3
- Compatible with Berkeley and Berlin handles





Tedee Smart lock remote access (Wi-Fi)		
Description	PU	Part Number
Tedee Smart Bridge	1	6-C9382-00-0-7
PU = Packaging Unit		

- Dimensions 63.5 x 63.5 x 28 mm / Weight 51.6g
- Power connection socket plug (included) or micro-USB (cable not included)
- Wi-Fi 2.4 GHz and 5.0 GHz
- Bluetooth 5.0 2.4 GHz
- Security TLS 1.3
- Compatible with Tedee smart lock 6-C9370-00-0-X and Bluetooth Keypad 6-C9387-00-0-6
- Works with smart home systems
- Up to 5 Smart Locks can be controlled (Bluetooth Range)

Smart locks



FERCO



Bluetooth keypad 2.0

Description	PU	Part Number	
Tedee Keypad 2.0	1	6-C9387-01-0-*	
* = Color	PU = Packaging Unit		

6 = Black, 7 = White



Additional information

- 3 X AAA batteries (included)
- Bluetooth 5.0 2,4 GHz
- Security TLS 1.3
- Up to 100 unique PINS
- Backlighted buttons, Sound signal, Bell button and more
- IP65 protection class
- Compatible with Tedee smart lock 6-9370-00-0-X and bridge 6-C9382-00-0-7
- Finger print acivated



Description	PU	Part Number
Tedee Door Sensor	1	6-C9390-00-0-7
	PU = Pa	ckaging Unit

Additional information

- Sensor Dimensions 30 × 64 × 14 mm
- Magnet Dimensions 17 × 64 × 7 mm
- Power Supply CR2032 battery
- 2.4 GHz to 2.483 GHz (Max output power: 8 dBm)
- 5°C to 50°C (indoor only)



Micro USB Cable

Description	PU	Part Number	
Micro USB Cable for TEDEE Lock	1	6-C9377-00-0-0	
	PU = Packaging Unit		

Edition 05.2025

Smart locks







Smart lock		
Description	PU	Part Number
Universal module V3	1	6-C9403-00-0-0
	PU = Pa	ackaging Unit

Additional information

- 35mm x 40mm x 15mm, 14 grams
- Input 24V DC, 100mA
- Bluetooth 4.2 (Danalock app)
- Z-Wave (Automation hub)
- 256bit AES encryption level
- Compatible with A-opener and access controlled systems
- Refer to wire Diagram



Bluetooth keypad			
Description		PU	Part Number
Danapad V3		1	6-C9407-00-0-X
	* = Color	PU = P	ackaging Unit
1 = Silver, 6 = Black			



Additional information

- 4 X AAA batteries (included)
- Bluetooth 4.2
- 256bit AES encryption level
- Compatible with smart lock (Danalock V3) and Universal Module



Danalock Remote Access		
Description	PU	Part Number
Danabridge V3	1	6-C9402-00-0-0
	PU = Pa	ackaging Unit

- 53 mm x 53 mm x 32 mm / Weighs 36 g
- USB power supply
- Add remote access to smart locks (Danalock or Universal Module)
- 2 Smart locks can be controlled with one Danabridge (via Bluetooth 4.2)
- Communication with Wi-Fi 802.11b/g/n

BELCANTO Handles & PZ Rosettes







Round Rosettes			
Description	PU	Part Number	
Rosettes for profile cylinder	1	K-C9075-00-0-*	
* = Color	PU = Pac	kaging Unit	
8B = Stainless Steel, 6 = Black			



Additional information

- Rosettes made of stainless steel
- Fastening kit included for 13/4" and 21/4" doors
- Compatible with smart lock (Danalock V3)
- For 13/4" doors: use 64mm cylinder (6-U7401-64-0-*)
- For 2 1/4" doors: use 80mm cylinder (6-U7401-80-0-*)
- For 2 3/4" doors : cut to length 70mm screws (9-C0570-70-0-1) and 90mm cylinder (6-U7401-90-0-*)
- External Ø 53 mm x 7.5 mm



Square Rosettes			
Description	PU	Part Number	
Rosettes for profile cylinder	1	K-C9077-00-0-*	
* = Color	PU = Pa	ckaging Unit	
8B = Stainless Steel, 6 = Black			



- Rosettes made of stainless steel
- Fastening kit included for 13/4" and 21/4" doors
- Compatible with smart lock (Danalock V3)
- For 13/4" doors: use 64mm cylinder (6-U7401-64-0-*)
- For 2 1/4" doors: use 80mm cylinder (6-U7401-80-0-*)
- For 2 3/4" doors: cut to length 70mm screws (9-C0570-70-0-1) and 90mm cylinder (6-U7401-90-0-*)
- External Ø 53 mm x 7.5 mm

BELCANTO Handles & PZ Rosettes








BELCANTO Half Handle Set and Rosettes			
Description PU Part Number			Part Number
Kit of inside handle with rosette and PZ rosette with outside blind rosette and PZ rosette		1	K-C9073-00-R/L-*
8 = Stainless Steel, 6 = Black * = Color		PU = P	ackaging Unit



Additional information

- Fastening kit included for 13/4" and 21/4" doors
- 8mm square spindle x 70 mm
- For 13/4" doors: use 64mm cylinder (6-U7401-64-0-*)
- For 2 1/4" doors: use 80mm cylinder (6-U7401-80-0-*)
- For 2 3/4" doors : cut to length 70mm screws (9-C0570-70-0-1) and 90mm cylinder (6-U7401-90-0-*)
- Ø External 53 mm x 7.5 mm

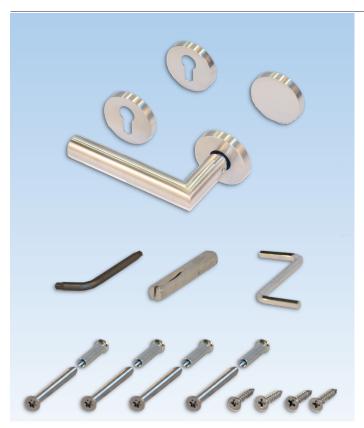

BELCANTO BKS Half Handle Set and Rosettes			
Description			Part Number
Kit of inside handle with rosette and PZ rosette with outside blind rosette and PZ rosette		1	K-C9072-00-0-*
8 = Stainless Steel, 6 = Black	tainless Steel, 6 = Black * = Color		ackaging Unit




- Handles and rosettes made of stainless steel
- Fastening kit included for 13/4" and 21/4" doors
- Fixed lever spring loaded can't be lifted
- 8mm square spindle x 110 mm included
- 8mm square spindle x 115 mm included
- Concealed fixing screws
- Compatible with smart lock (Danalock V3)
- For doors thicker than 2 1/4" up to 3": cut to length 70mm screws (9-C0570-70-0-1) and 130mm spindle (9-U8100-30-0-8)
- For 13/4" doors: use 70mm cylinder (6-U7401-70-0-*)
- For 2 1/4" doors: use 80mm cylinder (6-U7401-80-0-*)
- External Ø 55 mm x 9 mm


Euro Profile Cylinder





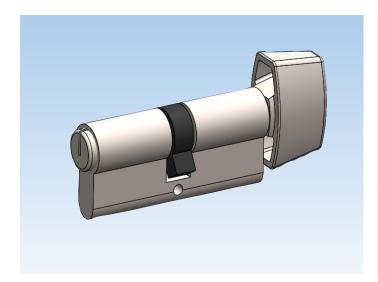

Profile cylinders				
Description	А	В	PU	Part Number
32/32 Cylinder	32	32	1	6-U7401-64-0-*
32/32 Cylinder (Matte Black)	32	32	1	6-U7401-64-0-6V
35/35 Cylinder	35	35	1	6-U7401-70-0-*
40/40 Cylinder	40	40	1	6-U7401-80-0-*
40/40 Cylinder (Matte Black)	40	40	1	6-U7401-80-0-6V
45/45 Cylinder	45	45	1	6-U7401-90-0-*
50/50 Cylinder	50	50	1	6-U7401-00-0-*
10/40 Cylinder Thumbturn	10	40	1	6-U7402-40-0-11
10/45 Cylinder Thumbturn	10	45	1	6-U7402-45-0-11
Rekeying kit for Ferco Schlage keyway			1	K-C4332-00-0-0
* = Color 11 = Satin Nickel, 6 =Black				PU = Packaging Unit





Additional information

- Refer to rosette to select cylinder length
- For keyed alike profile cylinder add 9-C9995-00-0-0
- 3 keys included
- 70mm screw for backset up to 65mm (Cut to length)
- Schlage Keyway type "C" 5 pins


Edition 05.2025

Strike Plates

Bag of Strike Plates





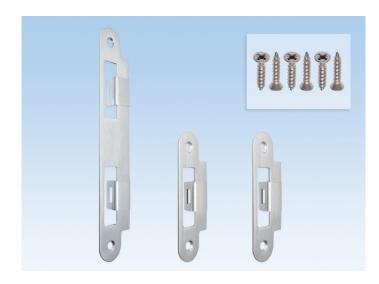


Bag of Strike Plates				
Description	Color	PU	Part Number	
Bag of strike plates for 45mm (1 3/4") thick doors	Satin Nickel	50	K-C4774-45-0-*	
Bag of strike plates for 57mm (2 1/4") thick doors	Satin Nickel	50	K-C4775-57-0-*	
11 = Satin Nickel, 6 = Black	* = Color	PU = Pa	ackaging Unit	



Additional information

- Made of stainless steel
- Bag contains:
 - 1 middle strike plate
 - 2 top and bottom strike plates
 - 6 screws
- Non-handed
- With clear protective film
- Available in handle matching finishes
- For SECURY Automatic door locks

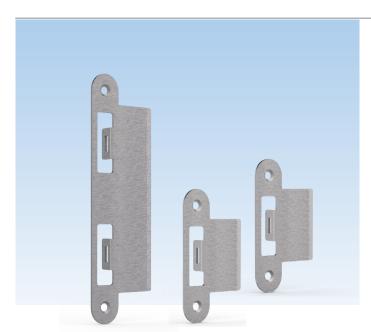

Bag of Strike Plates			
Description		PU	Part Number
Bag of strike plates for 76mm (3") thick doors		1	K-C4777-59-0-*
	* = Color	PU = Pa	ackaging Unit

8B = Stainless Steel



- Made in stainless steel
- Bag contains:


 - 1 middle striker with extended lip 2 top and bottom strikers with extended lip
- Non-handed
- For use with GU-SECURY Automatic door locks

Strike Plates

for Door Lock





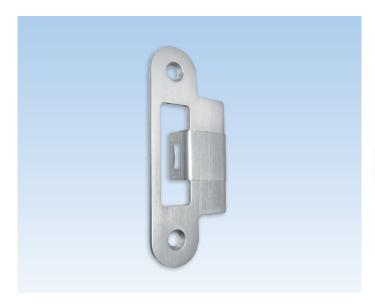


Striker with Extended Lip			
Description		PU	Part Number
Latchbolt strike plate for 45mm (1 3/4") thick doors		10	9-C4776-45-0-*
Latchbolt strike plate for 57mm (2 1/4") thick doors		10	9-C4776-57-0-*
11 = Satin Nickel, 6 = Black	* = Color	PU = Pa	ackaging Unit



Additional information

- Made of stainless steel
- Non-handed
- With clear protective film
- Two #8 x 5/8 FH/PH screws included
- For use with Automatic extension

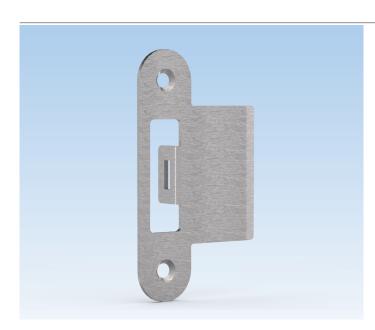

Top and Bottom Striker with Extended Lip			
Description		PU	Part Number
Latchbolt strike plate for 76mm (3") thick doors		10	9-C4716-59-0-*
	* = Color	PU = P	ackaging Unit

8B = Stainless Steel



Additional information

- Made in stainless steel
- Non-handed
- Two #8 x 5/8 FH/PH screws included
- For use with GU-SECURY Automatic door lock


Edition 05.2025

Strike Plates

for Door Lock





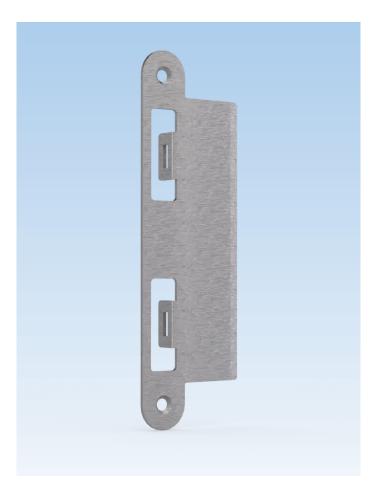


Description		PU	Part Number
Latch and deadbolt strike plate for 76mm (3") thick doors		10	9-C4717-59-0-*
	* = Color	PU = P	ackaging Unit
8B = Stainless Steel			
8B = Stainless Steel	6 8B		

- Made in stainless steel
- Non-handed
- Two #8 x 5/8 FH/PH screws included
- For use with GU-SECURY Automatic door lock





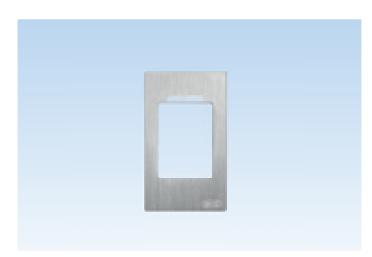

Substite Faceplate			
Description	Color	PU	Part Number
Substitute faceplate	Stainless steel	1	B-55606-00-1-1
		PU = Pa	ckaging Unit

Additional information

- Made of Stainless steel
- Replacement part for K-C5560-20-4-8 and K-C5560-23-4-8





Dust Cup with Edge				
Description	Color	PU	Part Number	
Plastic cup - 25mm Plastic cup - 15mm	Black Black	10 10	9-C4765-00-0-6 9-C4765-0A-0-6	
		PU = Pa	ackaging Unit	

Additional information

- Use for latch and 2 automatic latches (optional)
- Dimensions for plastic cup 25mm:
 - Length: 62mm - Width: 19.5mm
 - Depth: 25.8mm
- Dimensions for plastic cup 15 mm:
 - Length: 62mm - Width: 19.5mm - Depth: 16mm




Fastening Screws			
Description	Color	PU	Part Number
D1 screws	Stainless Steel	1000	9-C5362-32-0-8
PU = Packaging Unit			

- Stainless steel lock fastening screws
- Type D1 with self-drilling spiral point and high duplex thread with "Quadrex" socket
- Sharp tip for quick drive

For Door Lock





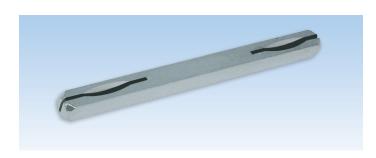

8mm Spindle			
Description	Color	PU	Part Number
8 x 8 x 120mm spindle for 41-57mm thick doors (1 spindle is supplied with door handle kit)	Zinc	10	9-U8100-20-0-8
8 x 8 x 130mm spindle for 57-76mm thick doors	Zinc	10	9-U8100-30-0-8
PU = Packaging Unit			



Torx 15 T-Key			
Description	Color	PU	Part Number
Torx key	Steel	1	H-00346-15-0-0
PU = Packaging Unit			

Additional information

■ Used for connecting SH2 and Automatic extensions



4mm Allen T-Key			
Description	Color	PU	Part Number
Allen key	Steel	1	H-00345-04-0-0
		PU = Pa	ackaging Unit

Additional information

 Used for reversing Automatic latchbolts on GU-SECURY Automatic lock and extension

For Door Lock







Construction Key			
Description	Color	PU	Part Number
Construction 7,8,10mm	Black	10	9-U0001-01-0-0
PU = Packaging Unit			

Additional information

The construction key is available for those who prefer to install the decorative hardware trim and lever sets on doors after the construction has been completed. Installing the escutcheon plates and levers in the final stage of construction prevents the decorative trim from becoming scratched or damaged.

The construction key has been designed to accommodate multipoint door hardware (8mm square), tilt-turn hardware (7mm square) and lift-slide hardware (10mm square).



Construction Key			
Description	Color	PU	Part Number
Key Tool Cylinder Length	Red	1	B 3539 0111
PU = Packaging Unit			

Additional information

The construction key is available for those who prefer to install the decorative hardware trim and lever sets on doors after the construction has been completed. Installing the escutcheon plates and levers in the final stage of construction prevents the decorative trim from becoming scratched or damaged.

Used to operate the multipoint door hardware through the profile cylinder opening, and to measure the profile cylinder length required from the side scale.

HEAD OFFICE

ferco@ferco.ca

Ferco Architectural Hardware Inc. 2000, Berlier St. Laval, QC H7L 4S4 Tel.: 450 973-1437 1 800 355-8810 Fax: 450 973-7661

ONTARIO / WESTERN PROVINCES

905 282-9588 1 800 668-5310 Fax: 905 282-9915 UNITED STATES

Tel.: 1 800 927-1097 1 888 454-0161

www.ferco.ca





